


© MPE-GARRY

Standard pin headers with 2,54 mm pitch and 0,64 mm square pins. Any pin length available on request. Customized connectors possible.

Single row pinheader.

Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	50
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	12,60
B (Mating)	6,80
C (PCB side)	3,30
L	2,50

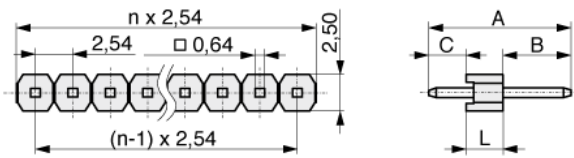

Footprint

