


Product Area	Male socket, solder M16 connectors IP 40	serie 581 / 680 / 682	Pole Article number	3 DIN 09 0307 00 03
--------------	---	-----------------------	---------------------	------------------------


illustration



scale drawing

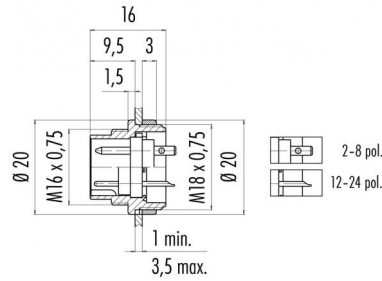

Contact Arrangement

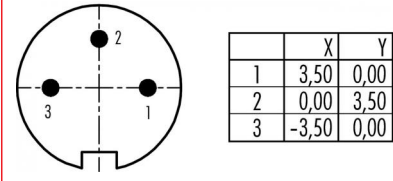

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Male socket
Connector locking system	Screw
Termination	solder
Wire gauge (mm)	0,75 mm ²
Wire gauge (AWG)	20
Upper temperature	+85 °C
Lower temperature	-40 °C

Material


Material of contact	CuZn (brass)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)
Material of housing	zinc diecasting, nickel plated

Cable data

Contacts 3 DIN, male socket, solder, silver plated contacts

Electrical values

Rated voltage	250 V
Rated impulse voltage	1500
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	7 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP 40
Mechanical operation	>500 mating cycles



Product
Area

Male socket, solder
M16 connectors IP 40

serie 581/ 680/ 682

Pole
Article number

3 DIN
09 0307 00 03

Installation instructions / Mounting cutout

