



STANDARD LCD FOR MEASUREMENT APPARATUS AND OTHER GENERAL APPLICATIONS

VI-322-DP, VI-322-2

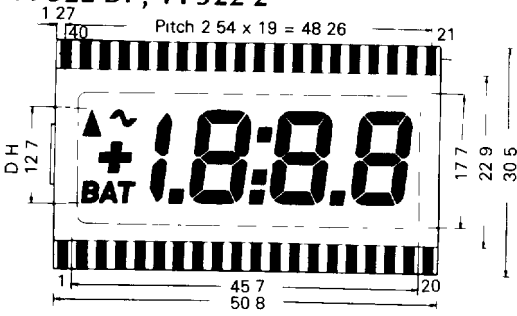

DRIVER Intersil ICL7106 Teledyne 7106




DIGIT HEIGHT 12.7mm (0.5")

Pin No	Segment	Pin No	Segment	Pin No	Segment	Pin No	Segment
1	COM	11	3C	21	1A	31	3F
2	-	12	3DP	22	1F	32	3G
3	B-C	13	2E	23	1G	33	NC
4	NC	14	2D	24	2B	34	NC
5	NC	15	2C	25	2A	35	NC
6	NC	16	2DP	26	2F	36	NC
7	NC	17	1E	27	2G	37	~
8	4DP	18	1D	28	L	38	▲
9	3E	19	1C	29	3B	39	■
10	3D	20	1B	30	3A	40	BAT

VI-402-DP, VI-402-2




DRIVER OKI MSM58292 HD61603




DIGIT HEIGHT 12.7mm (0.5")

Pin No	Segment	Pin No	Segment	Pin No	Segment	Pin No	Segment
1	COM	11	3C	21	1A	31	3F
2	NC	12	3DP	22	1F	32	3G
3	NC	13	2E	23	1G	33	NC
4	NC	14	2D	24	2B	34	4B
5	4E	15	2C	25	2A	35	4A
6	4D	16	2DP	26	2F	36	4F
7	4C	17	1E	27	G	37	4G
8	4DP	18	1D	28	L	38	NC
9	3E	19	1C	29	3B	39	NC
10	3D	20	1B	30	3A	40	COM

VI-422-DP, VI-422-2

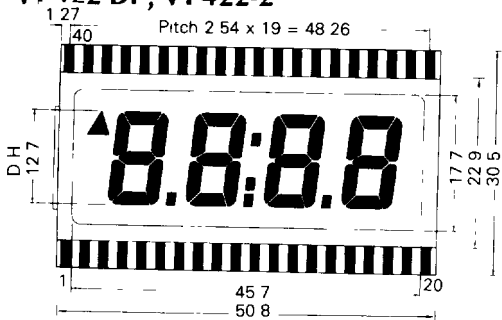


DRIVER OKI MSM58292, HD61603




DIGIT HEIGHT 12.7mm (0.5")

Pin No	Segment	Pin No	Segment	Pin No	Segment	Pin No	Segment
1	COM	11	3C	21	1A	31	3F
2	NC	12	3DP	22	1F	32	3G
3	NC	13	2E	23	1G	33	NC
4	NC	14	2D	24	2B	34	4B
5	4E	15	2C	25	2A	35	4A
6	4D	16	2DP	26	2F	36	4F
7	4C	17	1E	27	2G	37	4G
8	4DP	18	1D	28	L	38	▲
9	3E	19	1C	29	3B	39	NC
10	3D	20	1B	30	3A	40	COM

VIM-404-DP, VIM-404-2

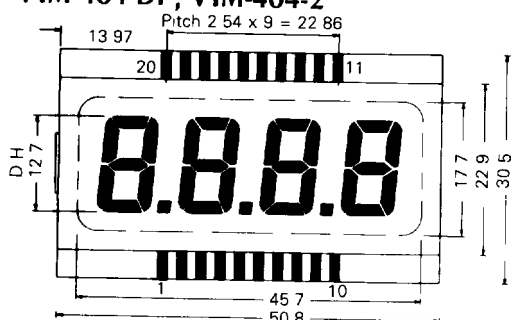


DRIVER Intersil ICM7233




DIGIT HEIGHT 12.7 mm (0.5")

Pin No	Segment	Pin No	Segment
1	NC	11	COM 1
2	NC	12	1A 1G 1D
3	NC	13	1F 1E NC
4	4B 4C 4DP	14	2A 2G 2D
5	3B 3C 3DP	15	2F 2E NC
6	2B 2C 2DP	16	3A 3G 3D
7	1B 1C NC	17	3F 3E NC
8	COM 3	18	4A 4G 4D
9	NC	19	4F 4E NC
10	NC	20	COM 2

VI-502-DP, VI-502-2

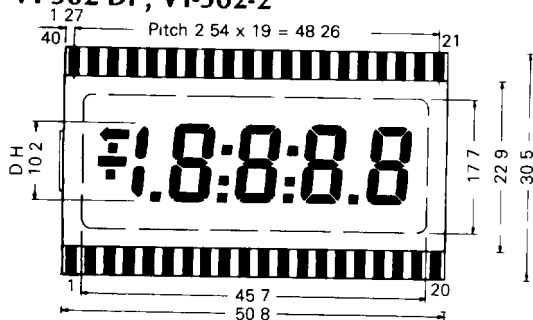

DRIVER Intersil ICM7224, RCA CD22105



DIGIT HEIGHT 10.2 mm (0.4")

Pin No	Segment	Pin No	Segment	Pin No	Segment	Pin No	Segment
1	COM	11	3C	21	1A	31	3F
2	-	12	3DP	22	1F	32	3G
3	B C	13	2E	23	1G	33	L4
4	5DP	14	2D	24	2B	34	4B
5	4E	15	2C	25	2A	35	4A
6	4D	16	2DP	26	2F	36	4F
7	4C	17	1E	27	2G	37	4G
8	4DP	18	1D	28	L3	38	■
9	3E	19	1C	29	3B	39	■
10	3D	20	1B	30	3A	40	COM