


139

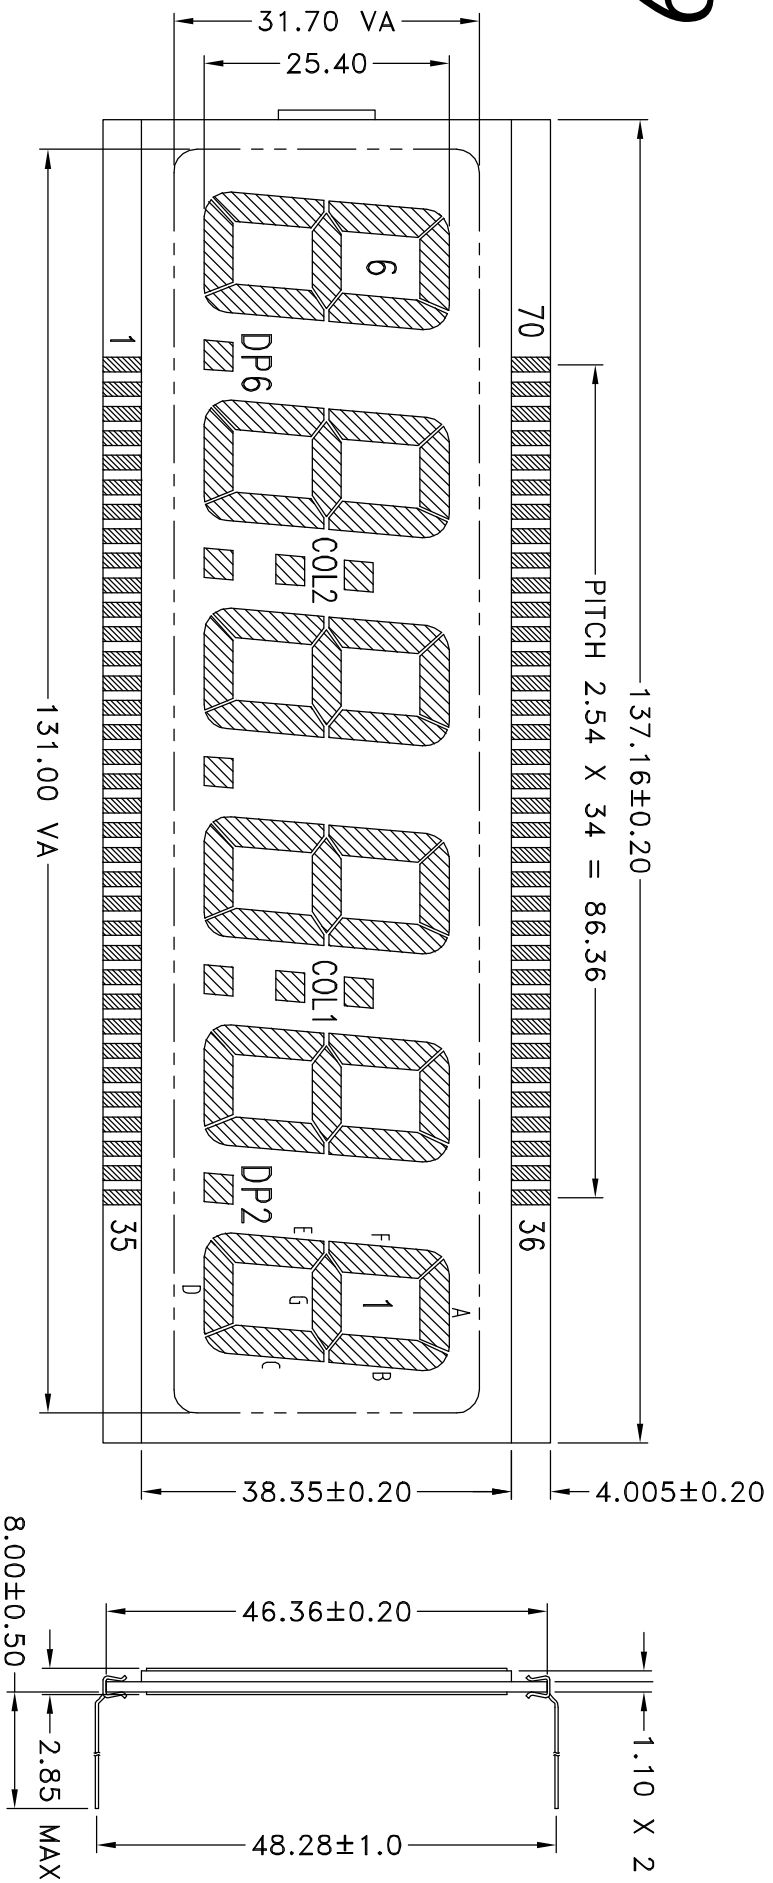

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
CDM	CDM	6E	6D	6C	DP6	5E	5D	5C	DP5	4E	4D					4C	
PIN	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
CDM	DP4	3E	3D				3C		DP3	2E	2D			2C	DP2	1E	1D
PIN	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
CDM	1C	1B	1A	1F	1G	2B	2A	2F	2G	CDL1		3B			3A	3F	
PIN	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68
CDM	5G			4B			4A	4F	4G	COL2	5B	5A	5F	5G	6B	6A	6F
																	6G
CDM	3G																
																	70
																	CDM

NOTES:

1. LCD MODE : TN
2. OPERATING VOLTAGE : 3.0V
3. DRIVE METHOD : STATIC
4. VIEW DIRECTION : 6 / 12 O'CLOCK
5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION: 1

Displaytech Ltd

email : sales@displaytech.com.hk

Fax : +852 2722 6998