


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		REVISED PER ECO-11-005140	31MAR11	RK	HMR

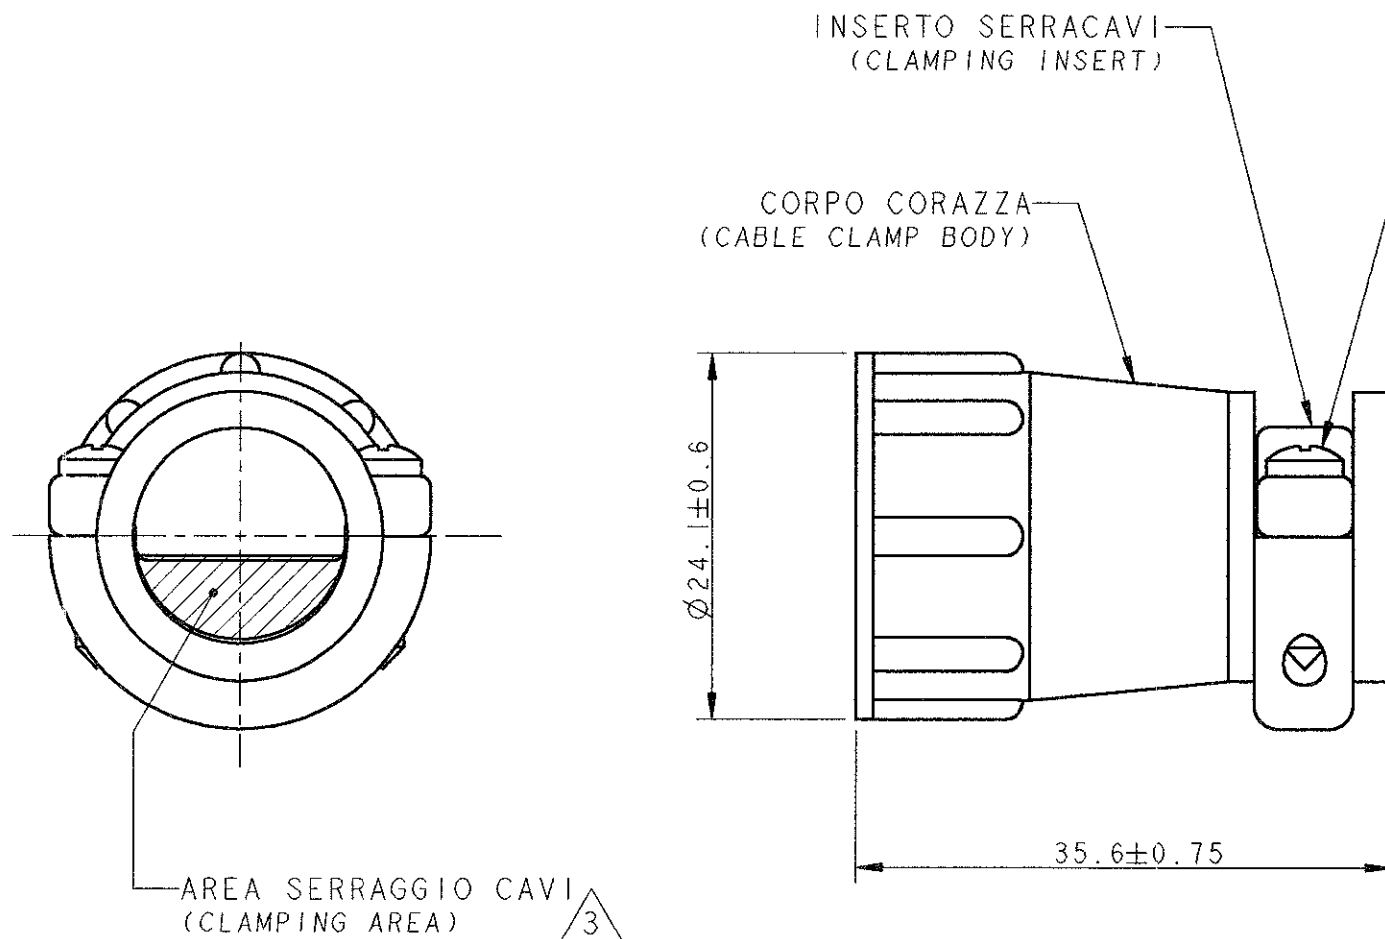

#5-20 VITI AUTOFIETTANTI IN ACCIAIO ZINCATO (Q.TA' 2)
 (#5-20 SELF-TAPPING SCREWS, ZINC PLATED STEEL, Q.TY 2)

- 1) MATERIALE : TERMOPLASTICO, COLORE NERO
 (MATERIAL : THERMOPLASTIC, BLACK COLOUR)
- 2) PARTICOLARI FORNITI NON ASSEMBLATI IN SACCHETTO DI PLASTICA
 (PARTS PACKAGED UNASSEMBLED INTO A PLASTIC BAG)
- 3) L'AREA SERRAGGIO CAVI E' VARIABILE DA 6.45 A 103.9 mm²
 IN FUNZIONE DEL TIPO E POSIZIONE DELL'INSERTO SERRACAVO
 (CABLE CLAMPING AREA ADJUSTABLE FROM .010 TO .161 SQ. IN.
 BY SELECTING AND REVERSING CLAMPING INSERTS)
- 4) QUESTO CONNETTORE E' RICONOSCIUTO E CERTIFICATO
 (THIS CONNECTOR IS UL RECOGNIZED AND CSA CERTIFIED)
- 5) Ø MAX DEL FASCIO CAVI = 11.5 mm.
 (MAXIMUM CABLE O.D. = .453 IN.)

P/N 182663-1 COME RAPPRESENTATO
 (P/N 182663-1 AS SHOWN)

DWN R. FABRIS		15NOV2000		TE Connectivity	
CHK -		-			
DIMS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME C.P.C. CABLE CLAMP KIT	
		0 PLC ± 1 PLC ± ±0.3 2 PLC ± ±0.3 3 PLC ± ±0.3 4 PLC ± ±0.3 ANGLES ±2°		PRODUCT SPEC 108-10024	
MATERIAL -		FINISH -		APPLICATION SPEC -	
		WEIGHT -		SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING				DRAWING NO C-182663	REV C1