



TOPJOB® Rail-Mounted Terminal Blocks 2.5 (4) mm²/AWG 12 Series 2002



1
7

0.25 – 2.5 (4) mm² ① 800 V/8 kV/3 24 A Terminal block width 5.2 mm / 0.205 in 10 – 12 mm / 0.43 in * CCA LR ②	0.25 – 2.5 (4) mm² ① AWG 22 – 12 600 V, 20 A 600 V, 20 A	0.25 – 2.5 (4) mm² ① 800 V/8 kV/3 24 A Terminal block width 5.2 mm / 0.205 in 10 – 12 mm / 0.43 in * CCA LR ②	0.25 – 2.5 (4) mm² ① AWG 22 – 12 600 V, 20 A 600 V, 20 A
--	---	--	---

① Push-in conductor sizes: AWG 18 – 12 (0.75 mm² – 4 mm²) "s" and AWG 18 – 14 (0.75 mm² – 2.5 mm²) "insulated ferrules, 12 mm"

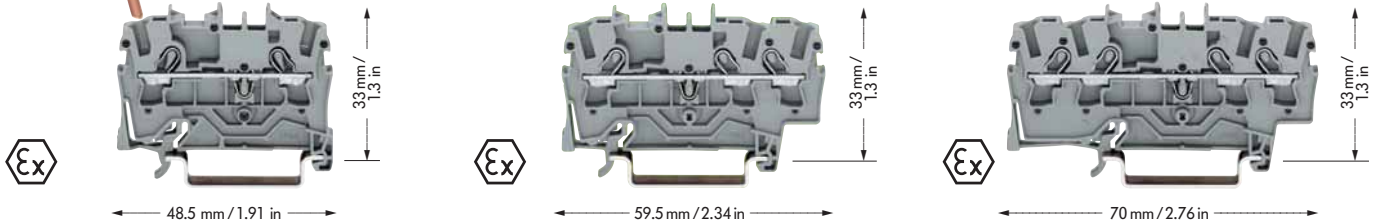

Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
2-conductor through terminal blocks		3-conductor through terminal blocks		4-conductor through terminal blocks	
grey	2002-1201 100	grey	2002-1301 100	grey	2002-1401 100
blue	2002-1204 100	blue	2002-1304 100	blue	2002-1404 100
orange	2002-1202 100	orange	2002-1302 100	orange	2002-1402 100
more colors are being prepared		more colors are being prepared		more colors are being prepared	
2-conductor ground (earth) terminal block		3-conductor ground (earth) terminal block		4-conductor ground (earth) terminal block	
green-yellow	2002-1207 100	green-yellow	2002-1307 100	green-yellow	2002-1407 100
Suitable for Ex e II applications 550 V, 22 A		Suitable for Ex e II applications 550 V, 22 A		Suitable for Ex e II applications 550 V, 22 A	
Suitable for Ex i applications		Suitable for Ex i applications		Suitable for Ex i applications	
Accessories appropriate marker system WMB/Miniature WSB/Marker strips (see section 14)					
End and intermediate plate , 0.8 mm / 0.031 in thick		End and intermediate plate , 0.8 mm / 0.031 in thick		End and intermediate plate , 0.8 mm / 0.031 in thick	
	orange 2002-1292 100 (4 x 25)		orange 2002-1392 100 (4 x 25)		orange 2002-1492 100 (4 x 25)
	grey 2002-1291 100 (4 x 25)		grey 2002-1391 100 (4 x 25)		grey 2002-1491 100 (4 x 25)
Insulation stop , 5 pcs/strip 200 strips		Insulation stop , 5 pcs/strip 200 strips		Insulation stop , 5 pcs/strip 200 strips	
	light grey 2002-171 0.25-0.5 mm ² dark grey 2002-172 0.75-1 mm ²		light grey 2002-171 0.25-0.5 mm ² dark grey 2002-172 0.75-1 mm ²		light grey 2002-171 0.25-0.5 mm ² dark grey 2002-172 0.75-1 mm ²
Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A		Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A		Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A	
	2-way 2002-402 200 (8 x 25) 3-way 2002-403 200 (8 x 25) 4-way 2002-404 200 (8 x 25) 5-way 2002-405 100 (4 x 25)		2-way 2002-402 200 (8 x 25) 3-way 2002-403 200 (8 x 25) 4-way 2002-404 200 (8 x 25) 5-way 2002-405 100 (4 x 25)		2-way 2002-402 200 (8 x 25) 3-way 2002-403 200 (8 x 25) 4-way 2002-404 200 (8 x 25) 5-way 2002-405 100 (4 x 25)
: : 10-way 2002-410 100 (4 x 25)		: : 10-way 2002-410 100 (4 x 25)		: : 10-way 2002-410 100 (4 x 25)	
Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A		Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A		Push-in type jumper bars , light grey, insulated, I _N 25 A, 20 A	
	1 - 3 2002-433 200 (8 x 25) 1 - 4 2002-434 200 (8 x 25) 1 - 5 2002-435 100 (4 x 25)		1 - 3 2002-433 200 (8 x 25) 1 - 4 2002-434 200 (8 x 25) 1 - 5 2002-435 100 (4 x 25)		1 - 3 2002-433 200 (8 x 25) 1 - 4 2002-434 200 (8 x 25) 1 - 5 2002-435 100 (4 x 25)
: : 1 - 10 2002-440 100 (4 x 25)		: : 1 - 10 2002-440 100 (4 x 25)		: : 1 - 10 2002-440 100 (4 x 25)	
Protective warning marker , for 5 terminal blocks yellow 2002-115 100 (4 x 25)		Protective warning marker , for 5 terminal blocks yellow 2002-115 100 (4 x 25)		Protective warning marker , for 5 terminal blocks yellow 2002-115 100 (4 x 25)	
Modular TOPJOB®S connector , for jumper contact slot 1 pole 2002-501 100 (4 x 25)		Modular TOPJOB®S connector , for jumper contact slot 1 pole 2002-501 100 (4 x 25)		Modular TOPJOB®S connector , for jumper contact slot 1 pole 2002-501 100 (4 x 25)	
Spacer , modular 2002-549 100 (4 x 25) see also page 1.12		Spacer , modular 2002-549 100 (4 x 25) see also page 1.12		Spacer , modular 2002-549 100 (4 x 25) see also page 1.12	
Test plug adapter , for test plug 4 mm/0.157 in Ø 2009-174 100 (4 x 25) Testing tap , for max. 2.5 mm ² 2009-182 100 (4 x 25)		Test plug adapter , for test plug 4 mm/0.157 in Ø 2009-174 100 (4 x 25) Testing tap , for max. 2.5 mm ² 2009-182 100 (4 x 25)		Test plug adapter , for test plug 4 mm/0.157 in Ø 2009-174 100 (4 x 25) Testing tap , for max. 2.5 mm ² 2009-182 100 (4 x 25)	

* For further approvals with corresponding ratings see section 15.