










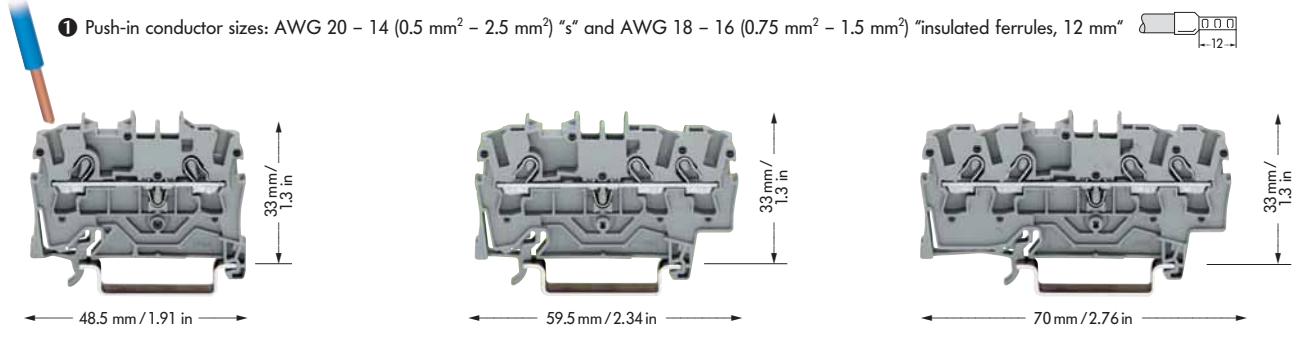





TOPJOB® Rail-Mounted Terminal Blocks 1.5 (2.5) mm²/AWG 14 Series 2001

<p>0.25 – 1.5 (2.5) mm² ① AWG 22 – 14 800 V/8 kV/3 600 V, 15 A Ⅴ 18 A 600 V, 15 A Ⅵ</p> <p>Terminal block width 4.2 mm / 0.165 in 9 – 11 mm / 0.39 in</p> <p>* Ⅴ Ⅵ</p>	<p>0.25 – 1.5 (2.5) mm² ① AWG 22 – 14 800 V/8 kV/3 600 V, 15 A Ⅴ 18 A 600 V, 15 A Ⅵ</p> <p>Terminal block width 4.2 mm / 0.165 in 9 – 11 mm / 0.39 in</p> <p>* Ⅴ Ⅵ</p>	<p>0.25 – 1.5 (2.5) mm² ① AWG 22 – 14 800 V/8 kV/3 600 V, 15 A Ⅴ 18 A 600 V, 15 A Ⅵ</p> <p>Terminal block width 4.2 mm / 0.165 in 9 – 11 mm / 0.39 in</p> <p>* Ⅴ Ⅵ</p>
---	---	---



Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
2-conductor through terminal blocks		3-conductor through terminal blocks		4-conductor through terminal blocks	
grey 2001-1201 ①	100	grey 2001-1301 ①	100	grey 2001-1401 ①	100
blue 2001-1204 ②	100	blue 2001-1304 ②	100	blue 2001-1404 ②	100
orange 2001-1202 ③	100	orange 2001-1302 ③	100	orange 2001-1402 ③	100
more colors are being prepared		more colors are being prepared		more colors are being prepared	
2-conductor ground (earth) terminal block		3-conductor ground (earth) terminal block		4-conductor ground (earth) terminal block	
green-yellow 2001-1207 ④	100	green-yellow 2001-1307 ④	100	green-yellow 2001-1407 ④	100
⊕ Ex e II applications are being prepared		⊕ Ex e II applications are being prepared		⊕ Ex e II applications are being prepared	
② Suitable for Ex i applications		② Suitable for Ex i applications		② Suitable for Ex i applications	

Accessories			appropriate marker system WMB/Marker strips (see section 14)		
End and intermediate plate, 0.8 mm/0.031 in thick		orange 2002-1292 100 (4 x 25)	End and intermediate plate, 0.8 mm/0.031 in thick		orange 2002-1392 100 (4 x 25)
		grey 2002-1291 100 (4 x 25)			grey 2002-1391 100 (4 x 25)
Insulation stop, 5 pcs/strip		200 strips	Insulation stop, 5 pcs/strip		200 strips
		dark grey 2001-172 0.75-1 mm ²			dark grey 2001-172 0.75-1 mm ²
Push-in type jumper bars, light grey, insulated, I_N 18 A		2-way 2001-402 200 (8 x 25)	Push-in type jumper bars, light grey, insulated, I_N 18 A		2-way 2001-402 200 (8 x 25)
		3-way 2001-403 200 (8 x 25)			3-way 2001-403 200 (8 x 25)
		4-way 2001-404 200 (8 x 25)			4-way 2001-404 200 (8 x 25)
		5-way 2001-405 100 (4 x 25)			5-way 2001-405 100 (4 x 25)
:		:	:		:
10-way 2001-410 100 (4 x 25)			10-way 2001-410 100 (4 x 25)		
Push-in type jumper bars, light grey, insulated, I_N 18 A		1 - 3 2001-433 200 (8 x 25)	Push-in type jumper bars, light grey, insulated, I_N 18 A		1 - 3 2001-433 200 (8 x 25)
		1 - 4 2001-434 200 (8 x 25)			1 - 4 2001-434 200 (8 x 25)
		1 - 5 2001-435 100 (4 x 25)			1 - 5 2001-435 100 (4 x 25)
:		:	:		:
1 - 10 2001-440 100 (4 x 25)			1 - 10 2001-440 100 (4 x 25)		
Modular TOPJOB®S connector, for jumper contact slot		1 pole 2001-501 100 (4 x 25)	Modular TOPJOB®S connector, for jumper contact slot		1 pole 2001-501 100 (4 x 25)
					
Spacer, modular		2001-549 100 (4 x 25)	Spacer, modular		2001-549 100 (4 x 25)
see also page 1.12			see also page 1.12		
Test plug adapter, for test plug 4 mm/0.157 in Ø		2009-174 100 (4 x 25)	Test plug adapter, for test plug 4 mm/0.157 in Ø		2009-174 100 (4 x 25)
		Testing tap, for max. 2.5 mm ²			Testing tap, for max. 2.5 mm ²
		2009-182 100 (4 x 25)			2009-182 100 (4 x 25)
Marker strip, white, plain		for center marking	Marker strip, white, plain		for center marking
		11 mm/0.433 in wide			11 mm/0.433 in wide
		50 m 2009-110			50 m 2009-110
on roll		300 m 2009-130	on roll		300 m 2009-130

* For further approvals with corresponding ratings see section 15.