




















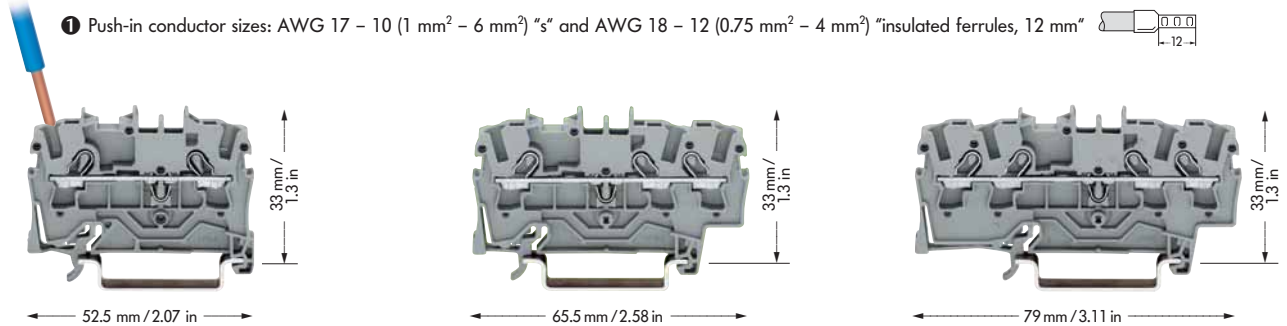


















































TOPJOB® Rail-Mounted Terminal Blocks 4 (6) mm²/AWG 10 Series 2004

0.5 – 4 (6) mm² ① 800 V/8 kV/3 32 A Terminal block width 6.2 mm / 0.244 in  11 – 13 mm / 0.47 in *  	AWG 20 – 10 600 V, 30 A   600 V, 30 A  	0.5 – 4 (6) mm² ① 800 V/8 kV/3 32 A Terminal block width 6.2 mm / 0.244 in  11 – 13 mm / 0.47 in *  	AWG 20 – 10 600 V, 30 A   600 V, 30 A  	0.5 – 4 (6) mm² ① 800 V/8 kV/3 32 A Terminal block width 6.2 mm / 0.244 in  11 – 13 mm / 0.47 in *  	AWG 20 – 10 600 V, 30 A   600 V, 30 A  
---	--	--	--	--	--



Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
2-conductor through terminal blocks		3-conductor through terminal blocks		4-conductor through terminal blocks	
grey 2004-1201 	50	grey 2004-1301 	50	grey 2004-1401 	50
blue 2004-1204 	50	blue 2004-1304 	50	blue 2004-1404 	50
orange 2004-1202 	50	orange 2004-1302 	50	orange 2004-1402 	50
more colors are being prepared		more colors are being prepared		more colors are being prepared	
2-conductor ground (earth) terminal block		3-conductor ground (earth) terminal block		4-conductor ground (earth) terminal block	
green-yellow 2004-1207 	50	green-yellow 2004-1307 	50	green-yellow 2004-1407 	50
 Ex e II applications are being prepared		 Ex e II applications are being prepared		 Ex e II applications are being prepared	
 Suitable for Ex i applications		 Suitable for Ex i applications		 Suitable for Ex i applications	
Accessories appropriate marker system WMB/Miniature WSB/Marker strips (see section 14)					
End and intermediate plate, 1 mm/0.039 in thick		End and intermediate plate, 1 mm/0.039 in thick		End and intermediate plate, 1 mm/0.039 in thick	
 orange 2004-1292 100 (4 x 25)		 orange 2004-1392 100 (4 x 25)		 orange 2004-1492 100 (4 x 25)	
 grey 2004-1291 100 (4 x 25)		 grey 2004-1391 100 (4 x 25)		 grey 2004-1491 100 (4 x 25)	
Insulation stop, 5 pcs/strip 200 strips		Insulation stop, 5 pcs/strip 200 strips		Insulation stop, 5 pcs/strip 200 strips	
 light grey 2004-171 0.25-0.5 mm ²		 light grey 2004-171 0.25-0.5 mm ²		 light grey 2004-171 0.25-0.5 mm ²	
 dark grey 2004-172 0.75-1 mm ²		 dark grey 2004-172 0.75-1 mm ²		 dark grey 2004-172 0.75-1 mm ²	
Push-in type jumper bars, light grey, insulated, I_N 32 A		Push-in type jumper bars, light grey, insulated, I_N 32 A		Push-in type jumper bars, light grey, insulated, I_N 32 A	
 2-way 2004-402 100 (4 x 25)		 2-way 2004-402 100 (4 x 25)		 2-way 2004-402 100 (4 x 25)	
 3-way 2004-403 100 (4 x 25)		 3-way 2004-403 100 (4 x 25)		 3-way 2004-403 100 (4 x 25)	
 4-way 2004-404 100 (4 x 25)		 4-way 2004-404 100 (4 x 25)		 4-way 2004-404 100 (4 x 25)	
 5-way 2004-405 50 (2 x 25)		 5-way 2004-405 50 (2 x 25)		 5-way 2004-405 50 (2 x 25)	
:	:	:	:	:	:
10-way 2004-410 50 (2 x 25)		10-way 2004-410 50 (2 x 25)		10-way 2004-410 50 (2 x 25)	
Push-in type jumper bars, light grey, insulated, I_N 32 A		Push-in type jumper bars, light grey, insulated, I_N 32 A		Push-in type jumper bars, light grey, insulated, I_N 32 A	
 1 - 3 2004-433 100 (4 x 25)		 1 - 3 2004-433 100 (4 x 25)		 1 - 3 2004-433 100 (4 x 25)	
 1 - 4 2004-434 100 (4 x 25)		 1 - 4 2004-434 100 (4 x 25)		 1 - 4 2004-434 100 (4 x 25)	
 1 - 5 2004-435 50 (2 x 25)		 1 - 5 2004-435 50 (2 x 25)		 1 - 5 2004-435 50 (2 x 25)	
:	:	:	:	:	:
1 - 10 2004-440 50 (2 x 25)		1 - 10 2004-440 50 (2 x 25)		1 - 10 2004-440 50 (2 x 25)	
Protective warning marker, for 5 terminal blocks		Protective warning marker, for 5 terminal blocks		Protective warning marker, for 5 terminal blocks	
 yellow 2004-115 100 (4 x 25)		 yellow 2004-115 100 (4 x 25)		 yellow 2004-115 100 (4 x 25)	
Modular TOPJOB®S connector, for jumper contact slot		Modular TOPJOB®S connector, for jumper contact slot		Modular TOPJOB®S connector, for jumper contact slot	
 1 pole 2004-501 100 (4 x 25)		 1 pole 2004-501 100 (4 x 25)		 1 pole 2004-501 100 (4 x 25)	
Spacer, modular 2004-549 100 (4 x 25) see also page 1.12		Spacer, modular 2004-549 100 (4 x 25) see also page 1.12		Spacer, modular 2004-549 100 (4 x 25) see also page 1.12	
Test plug adapter, for test plug 4 mm/0.157 in Ø		Test plug adapter, for test plug 4 mm/0.157 in Ø		Test plug adapter, for test plug 4 mm/0.157 in Ø	
 2009-174 100 (4 x 25)		 2009-174 100 (4 x 25)		 2009-174 100 (4 x 25)	
 Testing tap, for max. 2.5 mm² 2009-182 100 (4 x 25)		 Testing tap, for max. 2.5 mm² 2009-182 100 (4 x 25)		 Testing tap, for max. 2.5 mm² 2009-182 100 (4 x 25)	

* For further approvals with corresponding ratings see section 15.