



■ **Specifications**



Current rating:1.0AAC/DC
Voltage rating:50V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:500V AC for one minute
Operating temperature range:-25°C to +105°C

■ **Material and Finish**

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Gold Plated

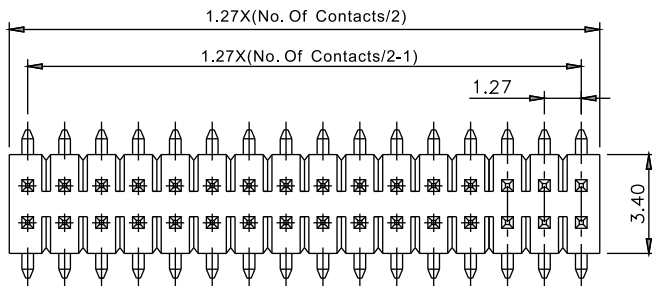

2199SB-XXG-SM-3017

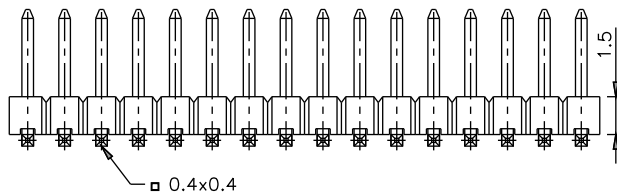

2199SB-XXG-SM-AB


■ **Ordering Information**

2199SB-XXG-SM-AB

① ② ③ ④ ⑤

① SB: Straight Double Rows	② No. Of Contacts	③ G: Gold Plated	④ SMD Type
⑤ Standard:3017 AB:Height			

■ **Recommended PCB Layout**

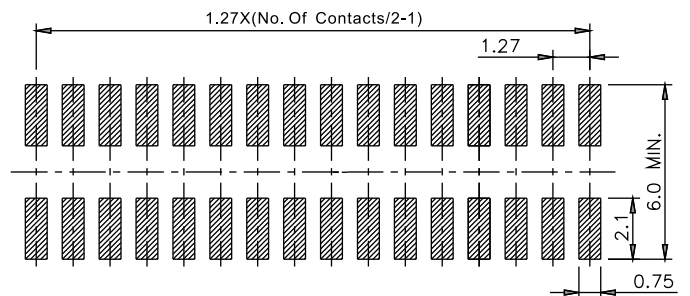

Unit:mm