


LB-I4R-A

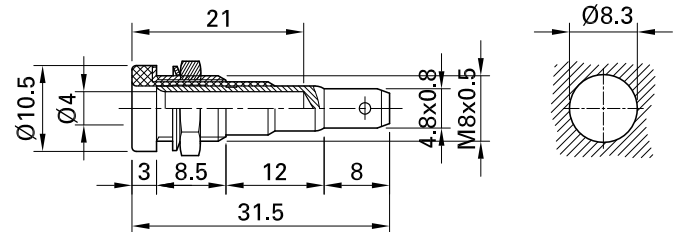

Item number 23.0190-*

Insulated, \varnothing 4 mm, rigid. Machined brass. Metal thread jacket on the insulation. The socket can be screw-mounted in predrilled panels. Available with hexagonal nut. Flat connecting tab 4.8 mm x 0.8 mm.

Technical data	
Diameter of plug system	4 mm
Rated Values	30 VAC, 25 A / 60 VDC, 25 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Colours *	20 21 22 23 24 25 26 27 28 29
Thread	M8x0,5
Test accessory acc. to	IEC EN 61010-2-030
Component parts	BI-LB-I4R-A; MU/M8x0,5; SP4
Supplied assembly material	MU/M8x0,5; SP4
Remarks	Accessories: Flat connecting receptacle FSH4,8x0,8