


Item no.: 281-611
 Product description: FUSED DISCONNECT TERMINAL BLOCK
 WITH PIVOTABLE FUSE HOLDER;
 WITHOUT BLOWN FUSE INDICATION;
 CENTRE MARKING; CARRIER RAIL DIN 35;
 FRONT-ENTRY; CAGE
 CLAMP® CONNECTION

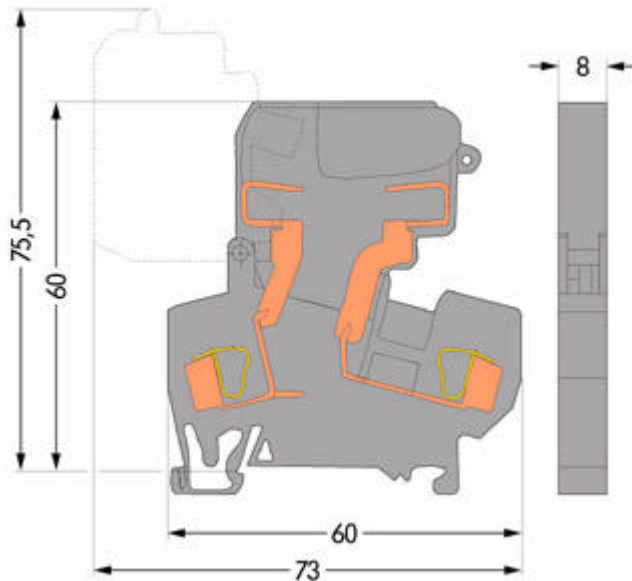

Packing unit 50 pieces

Cross section from [mm ²]	0,08 mm ²
Cross section to [mm ²]	4 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP® CONNECTION
Voltage CSA	600 V
Voltage UL	600 V
Current UL	10 A
Current CSA	10 A
Measured voltage EN	800 V
Measured shock voltage	8 kV
Pollution degree	3
Current intensity EN	10 A
Current intensity EN	6,3 A
Weight	17,26 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	60 mm
Height	2,36 in
Width	8 mm
Width	0,315 in
Depth	60 mm
Depth	2,36 in

Strip length from 9 mm
Strip length to 10 mm
Strip length 21,37 in

	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
281-611	BV	07436/C0			0,08-4
281-611	CCA	NL5470	800	10	0,08-4
281-611	CSA	154112-1505034	600	10	28-12
281-611	GL	17295-00HH	800	10	4
281-611	KEMA	2036066.01	800	10	0,08-4
281-611	UL	E45172	600	10	28-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected