


Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	6
Positioning peg	Without positioning peg
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
A (Length)	12,91
B (Mating)	5,84
C (PCB side)	4,57

Right angled SMD pin headers 2,54 mm pitch and 0,64 mm square pins, with gull-wing terminations. Mixed contact arrangements available upon request. Customized connectors possible.

[RoHS compliant](#)

Single row

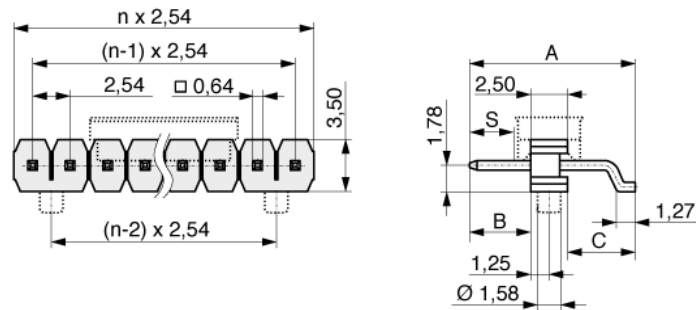

Footprint

