


Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	10
Positioning peg	Without positioning peg
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub> Please consider air- and creepage distances
Withstand voltage	500 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
A (Length)	12,91
B (Mating)	5,84
C (PCB side)	4,57

Right angled SMD pin headers 2,54 mm pitch and 0,64 mm square pins, with gull-wing terminations. Mixed contact arrangements available upon request. Customized connectors possible.

[RoHS compliant](#)

Single row

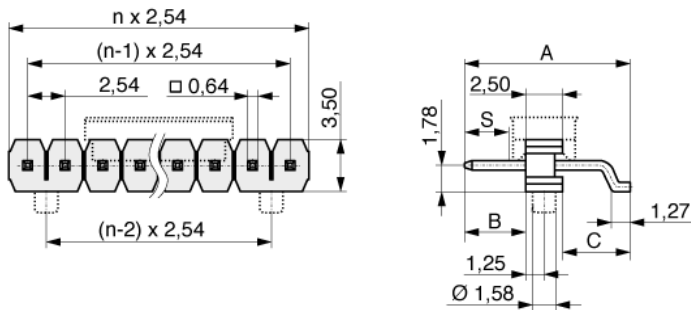

Footprint

