

ROHS Compliant








台灣駿品端子股份有限公司



TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號

TEL:886-2-26895596.26886112 FAX:886-2-26886110  
E-mail:tkp01.a88@msa.hinet.net http://www.tkp.com.tw

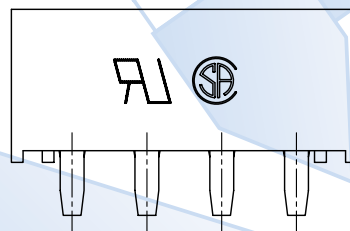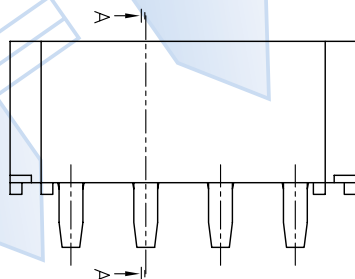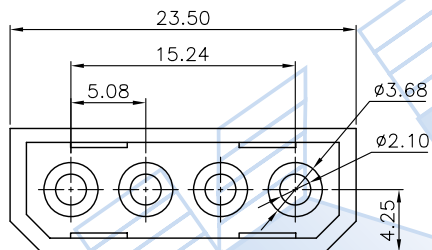


SEC A-A

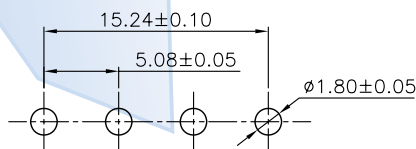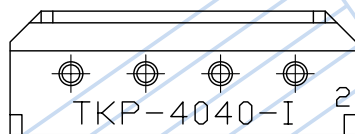

RECOMMENDED PCB LAYOUT

NOTE :

- \* Material : Nylon UL 94V-2 or PA9T, UL 94V-0 (Lead Free)
- \* Electrical rating : UL 30V 8.3A, AC/DC CSA 250V 4.5A, AC/DC
- \* Finish : plated Tin
- \* Split pins
- \*  $\phi$  2.10 pins available
- \* Mates with 870156 IDT, 4070 or 5050-04 connectors
- \* 4 Circuits

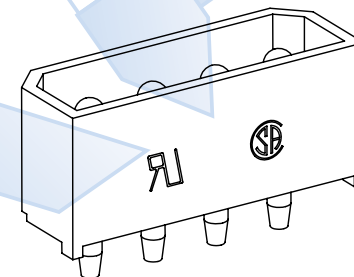

PART NO.	4040I-04(LF)			Part NO.	Material	Color/Finish	Remark	APPROVAL
				4040I-04(LF)	Nylon UL 94V-2			DRAWN: 孫海洋
TITLE	5.08mm Wire to Board			4040I-04-9T(LF)	PA9T UL 94V-0			CHECKED: 王忠
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	DATE	ODD NUMBERS	REV	APPROVED: 馮凌杰
	1.5:1	mm	1/1	.X± 0.30 .XXX±0.10 .XX± 0.20 ANGLE±2°	2006.07.04	ENG950001	A0	
	508-001		A508-001					