

4840, PCB terminals, Socket, 6.0 mm, 2-pole, DC Plug/Socket




**Description**

- PCB Mounting :  
Drop-in type , from rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight


**Technical Data**

Diameter	6.0 mm / 2.0 mm	Allowable Operation Temp.	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	PCB terminals tin-plated
Ratings DC	2.0A / 12VDC	Mounting	Drop-in type
Dielectric Strength	500VDC	Style	straight
Insulation Resistance	> 100 MΩ @ 500VDC	Lifetime	5000 Insertions

**Dimensions**

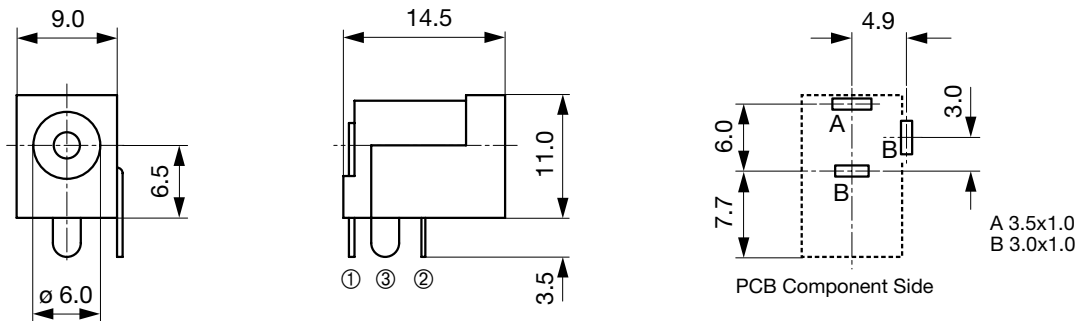

**Diagrams**



## All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	6.0	2-pole	PCB terminals	<a href="#">4840.2201</a>

Most Popular.

Availability for all products can be searched real-time:<http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 250 Pcs

## Mating Inlets/Plugs

### Category / Description

[DC Plug/Socket Overview complete](#)



4840, solder terminal, Plug, 5.5 mm, 2-pole, DC Plug/Socket	<a href="#">4840.1200</a>
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	<a href="#">4840.5200</a>
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	<a href="#">4840.5201</a>

[DC Plug/Socket further types to 4840.2201](#)