

SPECIFICATIONS

Current Rating: 5 AMP
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

Material

Insulator: PBT+30% G.F. or Nylon 9T, UL 94V-0
 Terminal: Copper Alloy

ORDER INFORMATION

5 7 D B D R X A - X X A X X X B A - 0 1

1: Tin shell + L(RoHS)
2: Nickel shell + L(RoHS)
3: Nickel shell + U(RoHS)
4: Tin shell + U(RoHS)

A: 7.2mm Footprint Male

No. of contacts

A: With Forking Grounding

A: Thread Insert #4-40
B: Thread Insert #4-40 + Jack Screw #4-40 Attached
C: Thread Insert #4-40 + Jack Screw #4-40 Removable + Rivet ground strap
M: Thread Insert #4-40 + Jack Screw #4-40 Removable
H: Front Rivet #4-40, H=5.8
V: Thread Insert M3+ Jack Screw M3 Attached.
U: Thread Insert M3

G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	




B: Black

A: Tray



AMTEK 耀德
 2019.09.26
 Released DCC

No. of Contacts	Dim. A	Dim. B	Dim. C
09	30.8	25.00	16.92
15	39.3	33.30	25.30
25	53.2	47.10	39.00
37	69.4	63.50	55.40

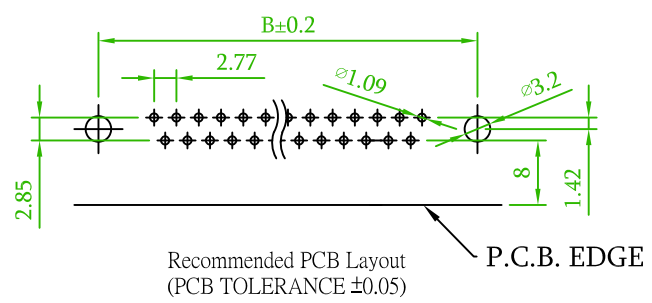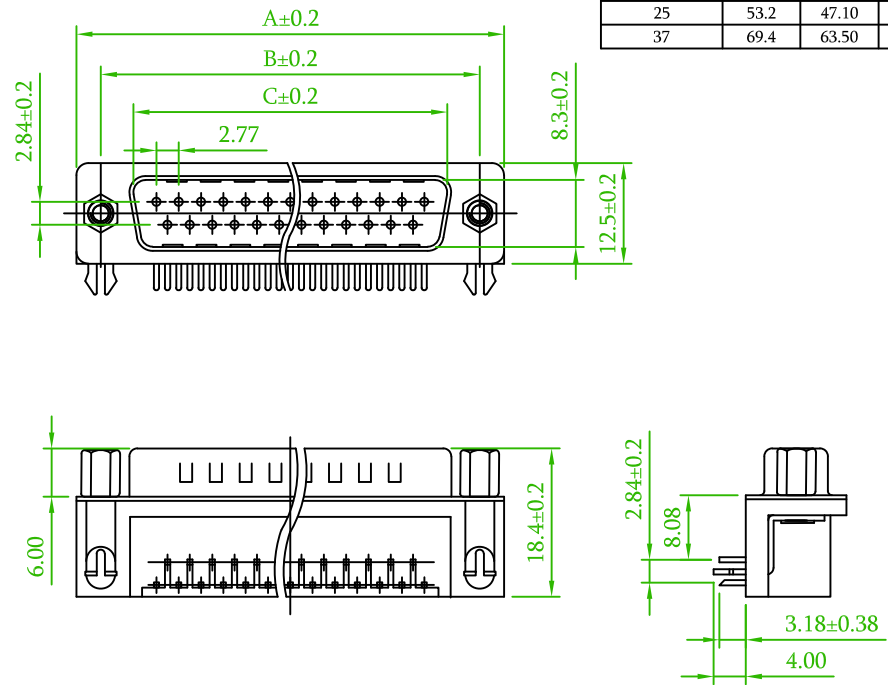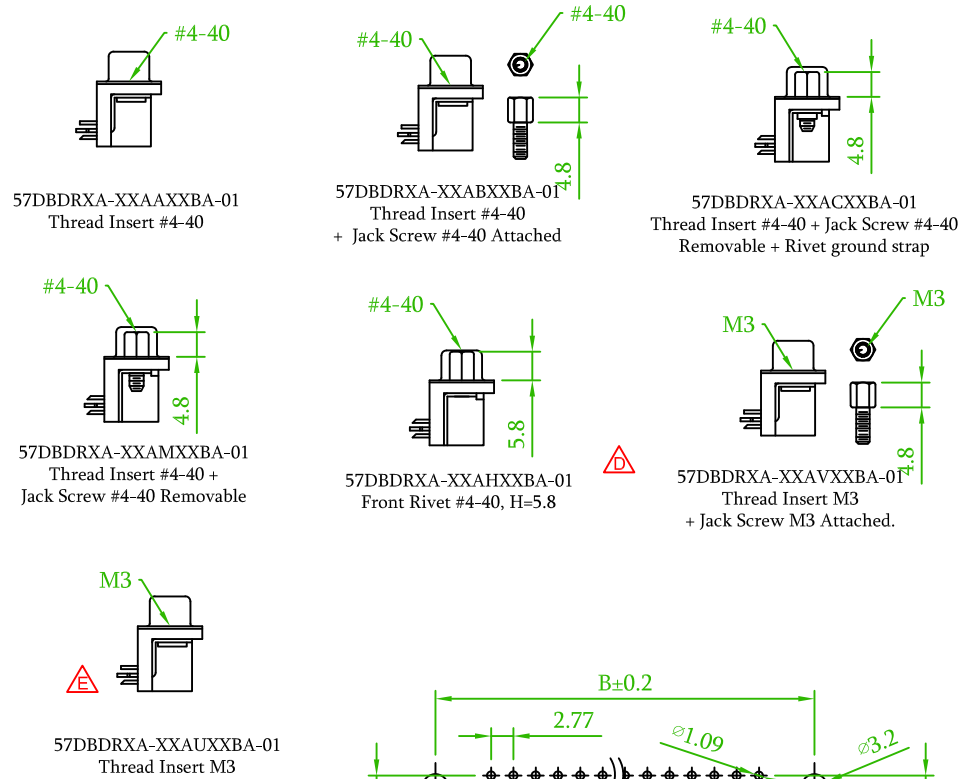

Old Part No.: DBR1-MXX-L

△E x1	Add an options: U: Thread Insert M3	Nick	2019/08/23
△D x1	Add an options: V: Thread Insert M3+ Jack Screw M3 Attached.	Gary	2018/11/22
△C x1	Add options: 3: Nickel Shell+U(RoHS), 4: Tin Shell+U(RoHS).	Gary	2018/06/26
△B x1	Add an option: H: Front Rivet #4-40, H=5.8.	Gary	2018/05/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

品名 TITLE	D-SUB R/A DIP TYPE				頁數 Page	1/2
品號 PART NO.	57DBDRXA-XXAXXXBA-01			繪圖 DRAWN	Roy	
圖號 DRAWING NO.	GN010-GB134	版本 REV.	E	核對 CHECKED	Josh	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason	
公差 TOLERANCE	.X ±0.30 .XX ±0.25	ANGLES: ±2°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2268-8036
 FAX: 886-2-2268-8035