


Product description **Polzahl: 4, Kabellänge 5 m, Kabel: 4 x 0,34 mm², PUR, Kabelstecker umspritzt, geschirmt**

Area **M12-A Series 763**
Order number **77 3529 0000 50704-0500**


Illustration



Scale drawing

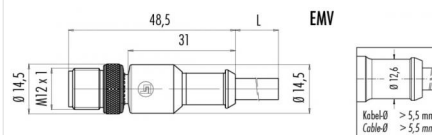

Contact arrangement




	X	Y
1	2,50	0,00
2	0,00	2,50
3	-2,50	0,00
4	0,00	-2,50

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black

Geschirmte Versionen: Schirm auf Gehäuse
Shielded versions: shield on housing

Attenuation characteristics

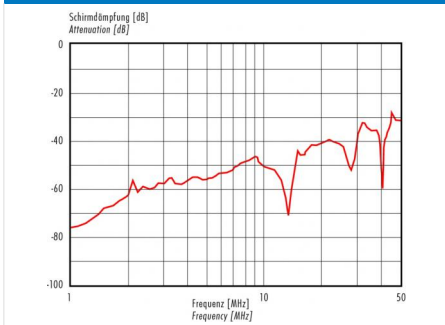

Technical data

General values

Connector locking system	bolted
Termination	crimp, moulded on cable
Wire gauge (mm)	0,34 mm ²
Wire gauge (AWG)	(22)
Upper limit temperature	90 °C
Lower limit temperature	-25 °C

Electrical values

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	II
Rated current (40 °C)	4 A
Volume resistivity	≤ 3 mΩ
EMC compliance	shielded
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

Material

Contact material	CuZn (Messing)
Contact plating	Au (gold)
Contact body material	PUR
Housing material	PUR

Product description **Polzahl: 4, Kabellänge 5 m, Kabel: 4 x 0,34 mm², PUR, Kabelstecker umspritzt, geschirmt**

Area **M12-A Series 763**
Order number **77 3529 0000 50704-0500**

Technical data

Cable data

Sheath material	PUR
Single-lead insulation	PP
Single-lead structure	42 x 0,1
Cable sheath Ø	4.7
Conductor resistance	60 Ω/Km
Temperature range, moving cable, °C from	-25
Temperature range, moving cable, °C to	90
Temperature range, fixed cable, °C from	-50
Temperature range, fixed cable, °C to	80
Bending radius, fixed cable	min. 5 x D
Bending radius, moving cable	min. 10 x D
Approval 1	UL listed
Cable diameter	4.7

Product description	Polzahl: 4, Kabellänge 5 m, Kabel: 4 x 0,34 mm², PUR, Kabelstecker umspritzt, geschirmt
Area	M12-A Series 763
Order number	77 3529 0000 50704-0500

Sicherheitshinweise

1. The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.
2. The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.
6. Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.
8. To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).