


Series 810

SPECIFICATIONS

技術資料

PLCC Socket



PCB Type

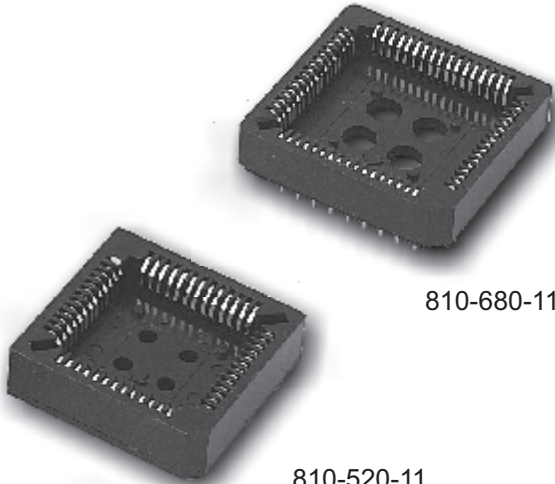

810-680-11

810-520-11

SERIES 800

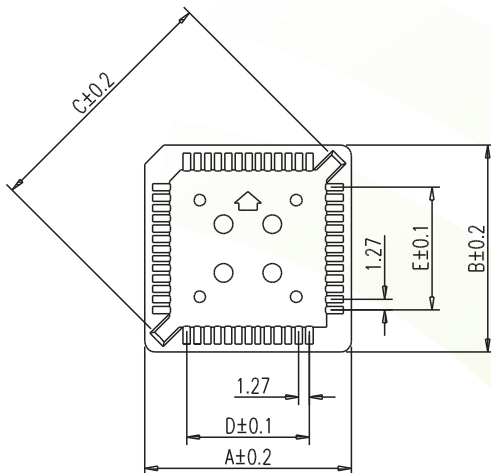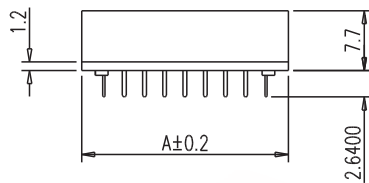

MATERIAL

- **Contact:** Phosphor Bronze
- **Housing:** PBT & 30% Glass Fiber (UL 94 V-0)
PPS & 40% Glass Fiber (UL 94 V-0)

ELECTRICAL


- **Contact Resistance:** 30Ω Max. at DC 100mA
- **Insulator Resistance:** 1000mΩ Min. at DC 500V
- **Current Rating:** 1AMP
- **Voltage:** AC 500V for 1 minute

MECHANICAL

- **Operating temperatures:** -55°C to +105°C


| Position | Dimension | | | | | |
|----------|-----------|-------|-------|-------|-------|-------|
| | A±0.2 | B±0.2 | C±0.2 | D±0.2 | E±0.2 | |
| 20 | 15.50 | 15.50 | 16.70 | 5.08 | 5.08 | |
| 28 | 18.00 | 18.00 | 20.38 | 7.62 | 7.62 | |
| 32 | 18.00 | 20.58 | 22.34 | 7.62 | 10.16 | |
| 44 | 23.58 | 23.58 | 27.60 | 12.70 | 12.70 | |
| 52 | 25.90 | 31.40 | 31.40 | 15.24 | 15.24 | |
| 68 | PBT | 31.80 | 31.80 | 38.34 | 20.32 | 20.32 |
| | PPS | 31.10 | 31.10 | 38.40 | 20.32 | 20.32 |
| 84 | PBT | 36.70 | 36.70 | 45.60 | 25.40 | 25.40 |
| | PPS | 36.00 | 36.00 | 45.60 | 25.40 | 25.40 |

Unit = mm

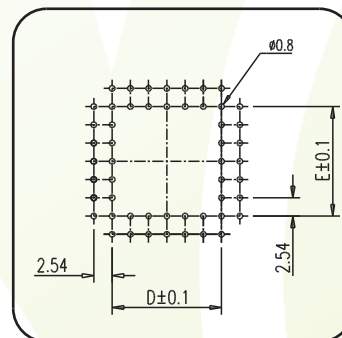

PC Board Layout

HOW TO ORDER 排序整理

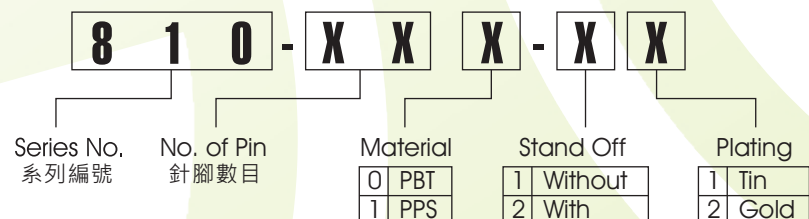

All Specification changes without prior notice