

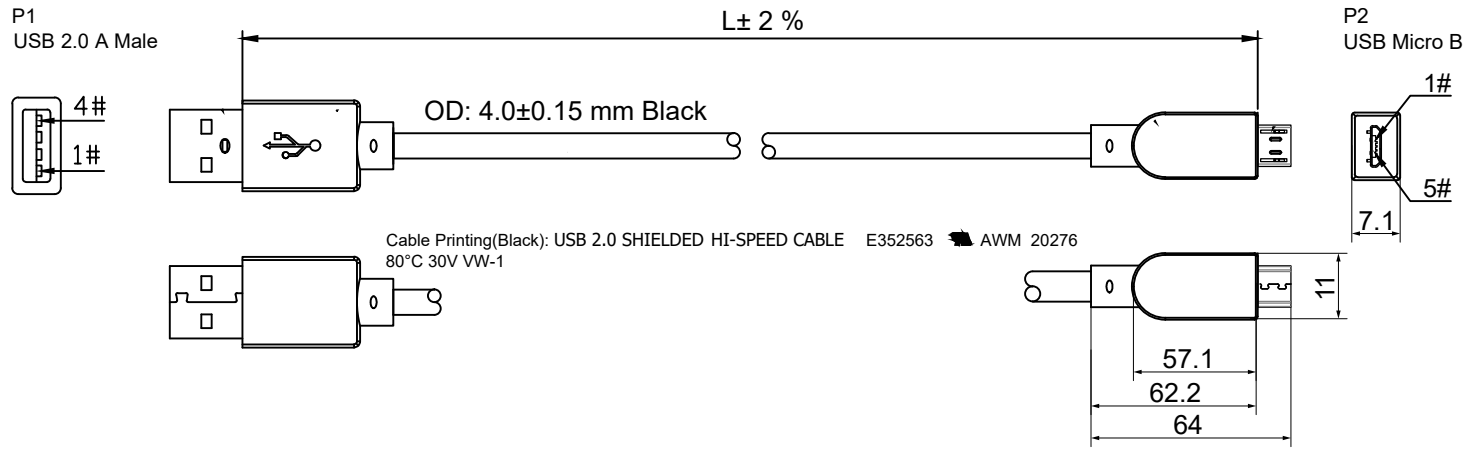


1 2 3 4 5 6 7 8 9 10 11 12 13 14

A
B
C
D
E
F
G
H
I
J

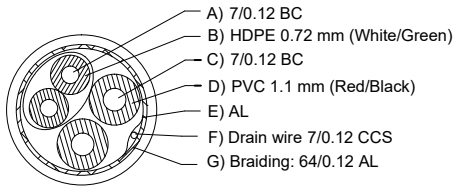

Nr. / No.	Länge / Length (m)
95736	0.15
95735	0.30
93922	0.60
93918	1.00
93181	1.80
93920	3.00
93921	5.00

Micro-USB Daten- und Ladekabel

- Verbinder: USB-A Stecker > Micro USB-B St.
- Innenleiter: AWG22/28
- Material: Kabelmantel: PVC
Innenleiter: BC, CCS
Isolierung: PVC, HDPE
Kontakte: vernickelt
Geflecht: AL
- Schirmung: doppelt
- USB Standard: High Speed USB 2.0
- Datenrate: max. 480 Mbit/s
- RoHS-konform

Micro USB data and charging cable

- USB-A male > Micro USB-B female
- Inner conductor: AWG22/28
- Material: Sheath: PVC
Conductors: BC, CCS
Insulation: PVC, HDPE
Contacts: nickel-plated
Braid: AL
- Shielding: double
- USB Standard: High Speed USB 2.0
- Data rate: max. 480 Mbps
- RoHS compliant

Änderungen

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	30.07.2014	USB MICRO-B SCHWARZ	
25.02.2019	tf	gepr.:	30.07.2014		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	von

1 2 3 4 5 6 7 8 9 10 11 12 13 14