








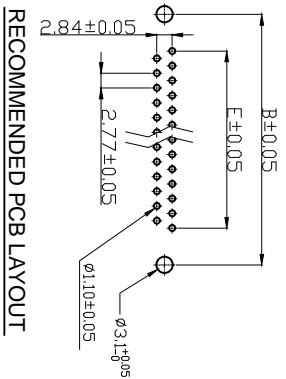
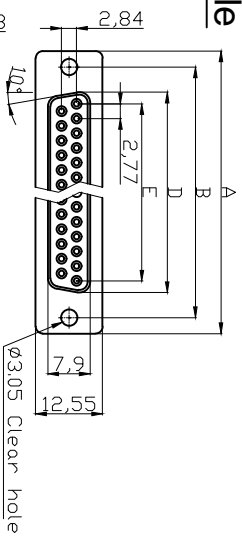





1	2	3	4	5	6	7																																																																								
A	<p>Male</p>   <p>NOTES:</p> <p>MATERIAL</p> <ol style="list-style-type: none"> 1. Insulator Material: Glass-filled thermoplastic PBT, UL94V-0, Gray 2. Contact Material: Brass or Phosphor Bronze 3. Shell : Steel, 100 μ" Tin Over 50μ" min Copper 4. Clinch Nut : Brass, Nickel Plated 5. Contact plating : Gold flash full gold & selective 15μ" Au ELECTRICAL <ol style="list-style-type: none"> 1. Current Rating : 3AMP 2. Voltage Rating : 250V AC/rms 60Hz 3. Contact Resistance: 20mΩ 4. Insulation Resistance: 1000MΩ min at 500 VDC 5. Withstand Voltage: 1000V AC/rms 60Hz for 1 minute ENVIRONMENTAL <ol style="list-style-type: none"> 1. Temperature Range: -20°C~+105°C 2. UL No. E 198287 3. Order Code: <p>A-Dx xx PP/Z-x</p> <p>Contact style: F - Female S - Male</p> <p>No. of Contacts 09 / 15 / 25 / 37 / 50 (3) Standard: Quality class III</p>																																																																													
B	 																																																																													
C	  <p>Recommended PCB Layout</p>																																																																													
D	 																																																																													
E	<p>Dimensions</p> <table border="1" data-bbox="478 1187 654 2060"> <thead> <tr> <th>Positions</th> <th>A</th> <th>B</th> <th>C</th> <th>E</th> <th>F</th> </tr> </thead> <tbody> <tr> <td>09</td> <td>30.81</td> <td>24.99</td> <td>16.92</td> <td>11.08</td> <td>19.20</td> </tr> <tr> <td>15</td> <td>39.20</td> <td>33.30</td> <td>25.25</td> <td>19.39</td> <td>27.70</td> </tr> <tr> <td>25</td> <td>53.04</td> <td>47.04</td> <td>38.96</td> <td>33.24</td> <td>41.10</td> </tr> <tr> <td>37</td> <td>69.40</td> <td>63.50</td> <td>55.42</td> <td>49.86</td> <td>57.30</td> </tr> <tr> <td>50</td> <td>66.90</td> <td>61.11</td> <td>52.86</td> <td>44.32</td> <td>55.10</td> </tr> </tbody> </table>						Positions	A	B	C	E	F	09	30.81	24.99	16.92	11.08	19.20	15	39.20	33.30	25.25	19.39	27.70	25	53.04	47.04	38.96	33.24	41.10	37	69.40	63.50	55.42	49.86	57.30	50	66.90	61.11	52.86	44.32	55.10																																				
Positions	A	B	C	E	F																																																																									
09	30.81	24.99	16.92	11.08	19.20																																																																									
15	39.20	33.30	25.25	19.39	27.70																																																																									
25	53.04	47.04	38.96	33.24	41.10																																																																									
37	69.40	63.50	55.42	49.86	57.30																																																																									
50	66.90	61.11	52.86	44.32	55.10																																																																									
F	<p>50 Positions</p>																																																																													
G	<p>ROHS compliant</p> <p>Unit:mm</p> <table border="1" data-bbox="103 582 446 1657"> <thead> <tr> <th>Scale</th> <th>Free</th> <th>⑥ Update</th> <th>18.12.2018</th> <th>Xavier</th> <th>Date</th> <th>Name</th> <th>Customer-No.</th> </tr> </thead> <tbody> <tr> <td>TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.</td> <td>±0.38</td> <td>⑤ Add the contact plating 15μ" Au</td> <td>01.09.2017</td> <td>Winnie</td> <td>Drawn</td> <td>15.08.2012</td> <td>Lucas</td> </tr> <tr> <td>X.X</td> <td>±0.25</td> <td>④ Add the detail contact plating</td> <td>23.12.2016</td> <td>Winnie</td> <td>Approved</td> <td>01.09.2017</td> <td>Winnie</td> </tr> <tr> <td>X.XX</td> <td>±0.13</td> <td>③ Update the dimension</td> <td>27.02.2015</td> <td>Winnie</td> <td></td> <td></td> <td></td> </tr> <tr> <td>DIM</td> <td>TOL</td> <td>② Update the operating temperature&UL No.</td> <td>04.08.2014</td> <td>Winnie</td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.°</td> <td>±3°</td> <td>① Update</td> <td>24.10.2012</td> <td>Winnie</td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.X°</td> <td>±1.0°</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Angle</td> <td>TOL</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> <td></td> <td></td> </tr> </tbody> </table>						Scale	Free	⑥ Update	18.12.2018	Xavier	Date	Name	Customer-No.	TOLERANCE								X.	±0.38	⑤ Add the contact plating 15μ" Au	01.09.2017	Winnie	Drawn	15.08.2012	Lucas	X.X	±0.25	④ Add the detail contact plating	23.12.2016	Winnie	Approved	01.09.2017	Winnie	X.XX	±0.13	③ Update the dimension	27.02.2015	Winnie				DIM	TOL	② Update the operating temperature&UL No.	04.08.2014	Winnie				X.°	±3°	① Update	24.10.2012	Winnie				X.X°	±1.0°							Angle	TOL	Id.	Modification	Date	Name		
Scale	Free	⑥ Update	18.12.2018	Xavier	Date	Name	Customer-No.																																																																							
TOLERANCE																																																																														
X.	±0.38	⑤ Add the contact plating 15μ" Au	01.09.2017	Winnie	Drawn	15.08.2012	Lucas																																																																							
X.X	±0.25	④ Add the detail contact plating	23.12.2016	Winnie	Approved	01.09.2017	Winnie																																																																							
X.XX	±0.13	③ Update the dimension	27.02.2015	Winnie																																																																										
DIM	TOL	② Update the operating temperature&UL No.	04.08.2014	Winnie																																																																										
X.°	±3°	① Update	24.10.2012	Winnie																																																																										
X.X°	±1.0°																																																																													
Angle	TOL	Id.	Modification	Date	Name																																																																									
H	<p>1</p> <p>2</p> <p>3</p> <p>4</p> <p>5</p> <p>6</p> <p>7</p>																																																																													
G	<p>ASSMANN WSW-No. A-DX XX PP/Z-X</p> <p>Drawing-No. ASS 4885 CO rev06</p> <p>Replace Sheet 1/2</p>																																																																													
H																																																																														

1 2 3 4 5 6 7


Female

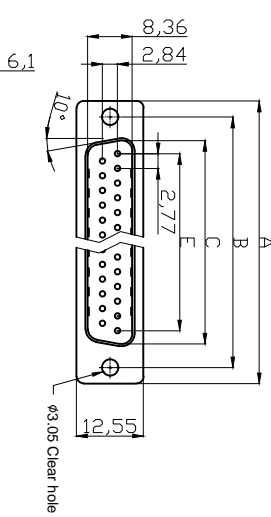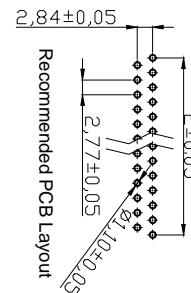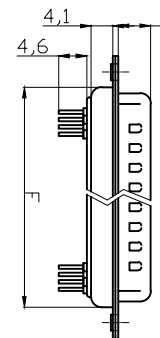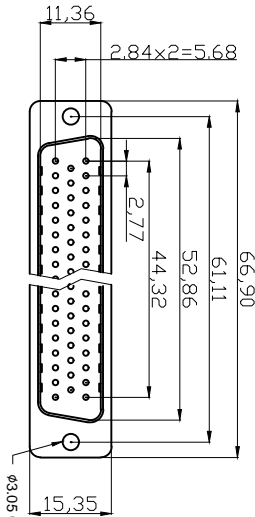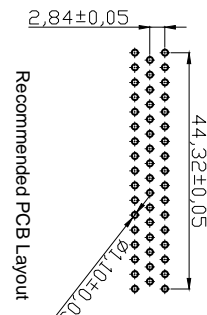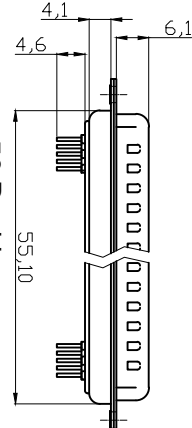

RECOMMENDED PCB LAYOUT

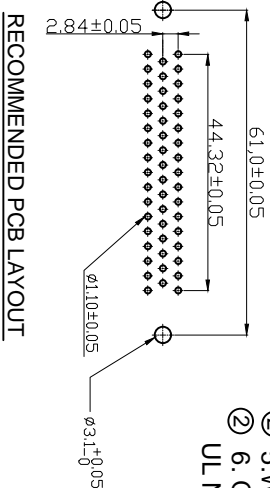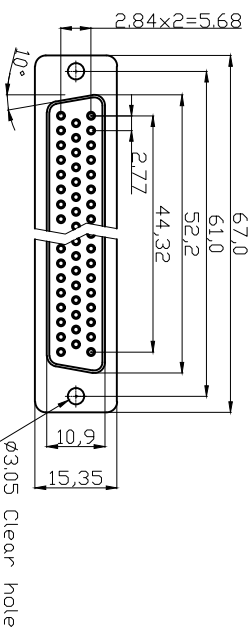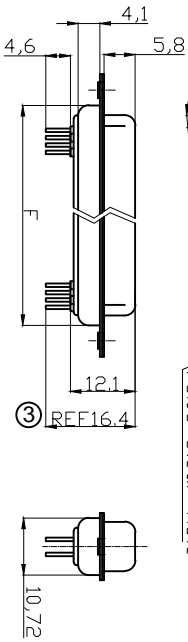

RECOMMENDED PCB LAYOUT

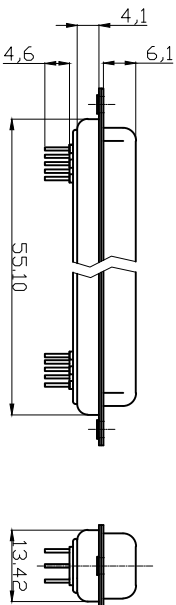

50 POSITIONS

Positions	A±0.15	B±0.10	D±0.13	E±0.08	F±0.10
09	30.81	24.99	16.33	11.08	19.20
15	39.20	33.30	24.70	19.39	27.70
25	53.05	47.04	38.40	33.24	41.10
37	69.40	63.50	54.80	49.86	57.30
50	67.0	61.0	52.2	44.32	55.10

Dimensions

ROHS compliant
Unit:mm

Scale	Free	⑥ Update	18.12.2018	Xavier	Date	Name	Customer-No.
TOLERANCE							
X.	±0.38	⑤ Add the contact plating 15µr Au	01.09.2017	Winnie	Drawn	15.08.2012	Lucas
X.X	±0.25	④ Add the detail contact plating	23.12.2016	Winnie	Approved	01.09.2017	Winnie
X.XX	±0.13	③ Update the dimension	27.02.2015	Winnie			
DIM	TOL	② Update the operating temperature&UL No.	04.08.2014	Winnie			
X.°	±3°	① Update	24.10.2012	Winnie			
X.X°	±1.0°						
Angle	TOL	Id.	Modification	Date	Name		



ASSMANN WSW-NO.
A-DX XX PP/Z-X

Drawing-No.

ASS 4885 CO

rev06

Replace

Sheet 2/2

1 2 3 4 5 6 7