



Distance sleeves with internal thread

- other lengths and threads on request
- ... please indicate length "L"

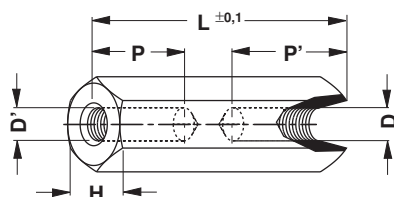

art. no.	dim. [mm]				
	H	D/D'	L	P	P'
ABM 2550 ...	5	M2.5	5/ 8/ 10/ 12/ 15	=L	—
ABM 2550 ...	5	M2.5	18	8	8
ABM 2550 ...	5	M2.5	20/ 25/ 30/ 35/ 40/ 45/ 50	10	10
ABM 3050 ...	5	M3	5/ 8/ 9/ 10/ 12/ 13/ 15	=L	—
ABM 3050 ...	5	M3	16/ 18/ 19	8	8
ABM 3050 ...	5	M3	20/ 25/ 29/ 30/ 35/ 40/ 45/ 50	10	10
ABM 4070 ...	7	M 4	5/ 8/ 10/ 12/ 15	=L	—
ABM 4070 ...	7	M 4	18	9	9
ABM 4070 ...	7	M 4	20/ 25/ 30/ 35/ 40/ 45/ 50	10	10
material:	brass				
surface:	6 µm nickel-plated, solderable				

- other lengths and threads on request
- ... please indicate length "L"

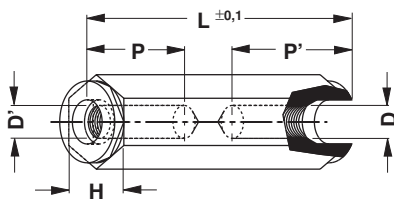

art. no.	dim. [mm]				
	H	D/D'	L	P	P'
ABP 2550 ...	5	M2.5	10	=L	—
ABP 2550 ...	5	M2.5	15/ 20/ 25/ 30	6	6
ABP 3060 ...	6	M3	10/ 12/ 15	=L	—
ABP 3060 ...	6	M3	20	8	8
ABP 3060 ...	6	M3	25/ 30	10	10
ABP 4080 ...	8	M 4	10/ 15/ 20	=L	—
ABP 4080 ...	8	M 4	30/ 40	10	10
material:	polyamide, GF reinforced				
temperature range:	-30 °C ... +110 °C				
colour:	black				