



2.00mm pitch Female Header
- THT - low profile

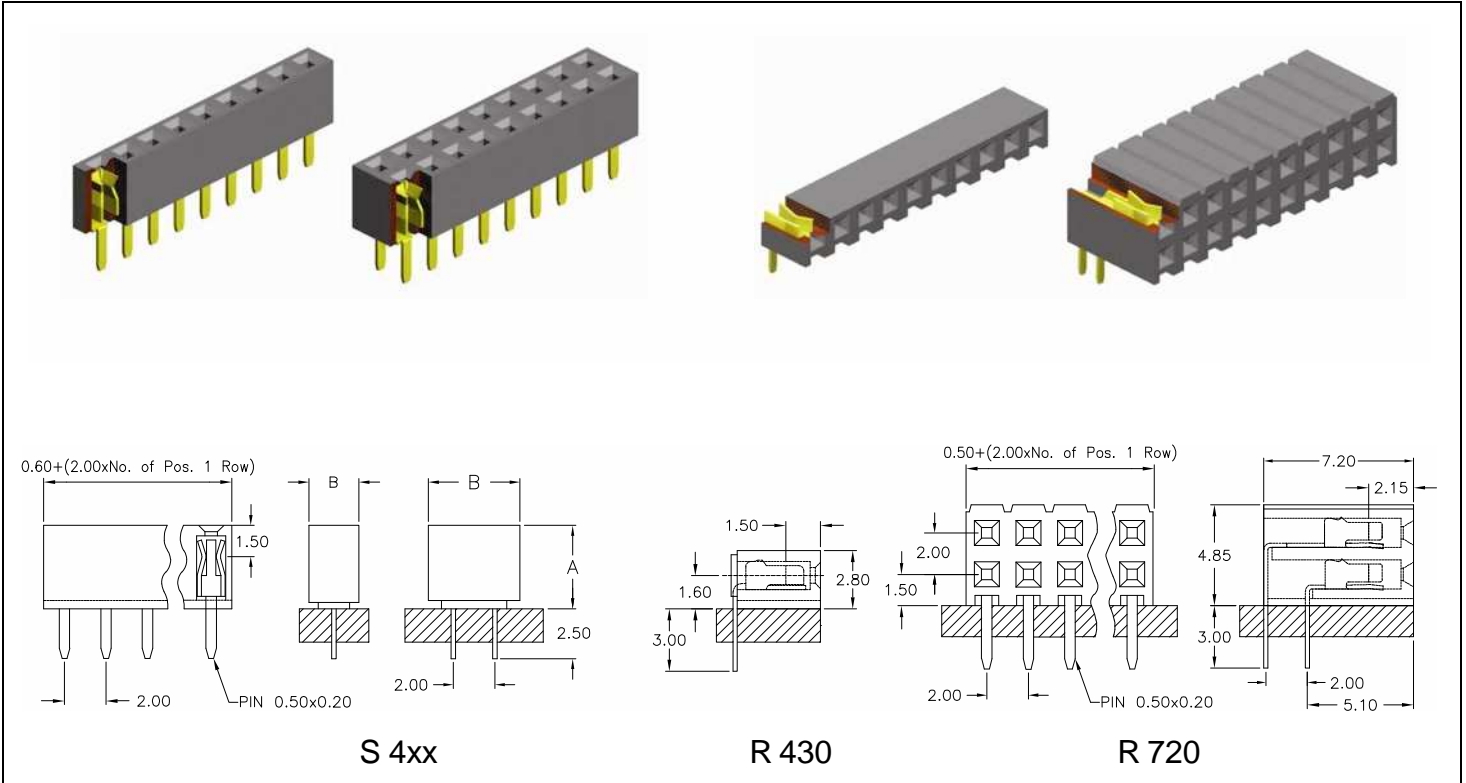

SPECIFICATIONS	
Current rating	1 A
Insulator resistance	1000 M: min.
Contact resistance	20 m: max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to + 105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	Nylon UL 94 V-0

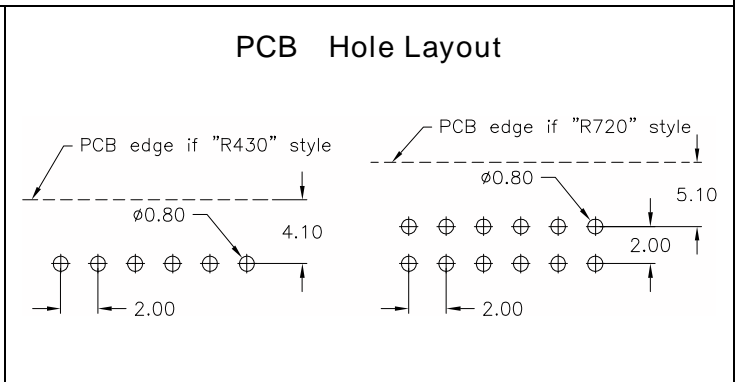

APPLICATION AND FEATURES

Low profile, 4.00mm and 4.30mm height single & dual row straight.
Designed for board to board small spacing interconnection.
High quality dual beam contacts mating with 0.50 x 0.50mm Pin Header.

How to order

BL x - xxx - X xxx - 55 / 2

Rows	Nbr of contacts	Version	Plating
1 = single row	S400 & S430 = 002 to 040	S 400 = straight – single row : "A"= 4.00 mm "B"= 2.20 mm	55 = gold
	R430 = 003 to 025	S 430 = straight – single row : "A"= 4.30 mm "B"= 2.40 mm	
2 = dual row	S400 & S430 = 004 to 080	S 430 = straight – dual row : "A"= 4.30 mm "B"= 4.60 mm	
	R720 = 004 to 080	R 430 = right angle – single row	
		R 720 = right angle – dual row	Other platings on request