

EM 212



Euromas II
Euromas II enclosures, polycarbonate

Order no.: 62212000

Colour of enclosure group

Light grey, similar to RAL 7035; special colours on request

Protection class

IP 65/DIN EN 60529, higher ingress protection on request


Enclosure material

ABS, PC (UV stabilised); seal made of CR; UL 94 V0 types on request; for details see Technical Information

Scope of delivery: Lid and base, self-tapping coarse-pitch thread lid screws made of V2A

Note: * = Available on request.

Accessories: See following pages.

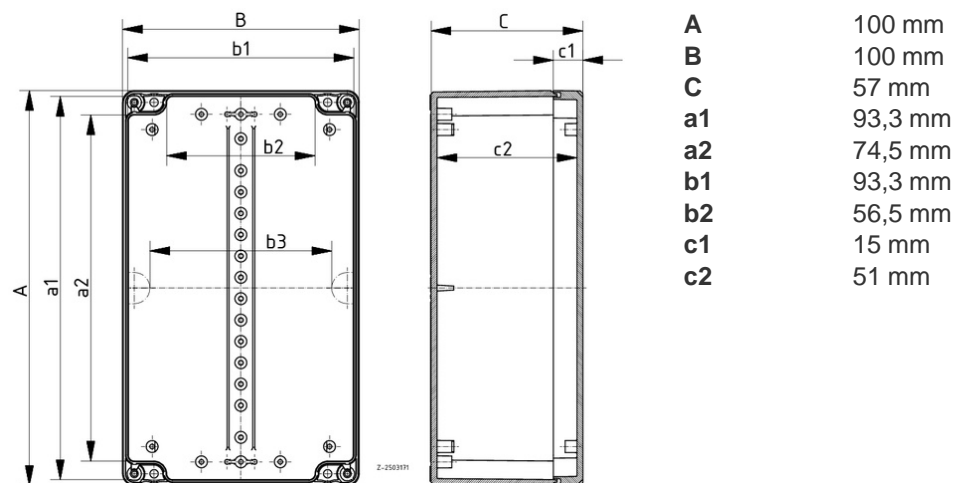

Technical drawings

Catalogue drawing in DXF format:

[62212000_EM-212.dxf](#) (788 KB)

Catalogue drawing in PDF format:

[62212000_EM-212.pdf](#) (81 KB)

3D product data in STEP format:

[Registration necessary](#)

Basic drawing for processing work:

[62212000_EM-212-G.dxf](#) (445 KB)

Chapter download

[Euromas II_GB.pdf](#) (607 KB)

Accessories



Rubber feet, self-adhesive

22009000 [GF](#)

Polyurethane, 65-75 Shore Black



Wall brackets, screw-on at rear

22010000 [EM-WL](#)



Screw covers

22080000 [EM-SA](#)



Mounting panels, laminated paper

22212000 [M](#)

For EM/ET 212*



DIN rail acc. to DIN EN 60715 TH 15

22150901 [TS 15](#)

For EM/ET 212



DIN rail acc. to DIN EN 60715 G 32

22320901 [TS 32](#)

For EM/ET 212



DIN rail acc. to DIN EN 60715 TH 35

22350901 [TS 35](#)

For EM/ET 212

