

A 101



Euromas-Aluminium
 Euromas enclosure, aluminium

Order no.: 01101000

Colour of enclosure group

Silver grey, similar to RAL 7001; special colours on request. V 215: black, similar to RAL 9005

Protection class

IP 66/DIN EN 60529, higher protection class on request. V 215: IP 65/DIN EN 60529

Enclosure material


G Al Si 12, PU foamed seal; V215: Vestamid, CR seal; for details see Technical Information

Scope of delivery: Lid and base, lid screws made of V2A, earthing screw

Note: * = Available on request. Accessories: See following pages.

A 198: Because of the wall fixing drill holes inside the sealed section of the enclosure, expert sealing of the wall fixing is necessary to attain protection class IP 66.

G = design with transparent lid (PC)

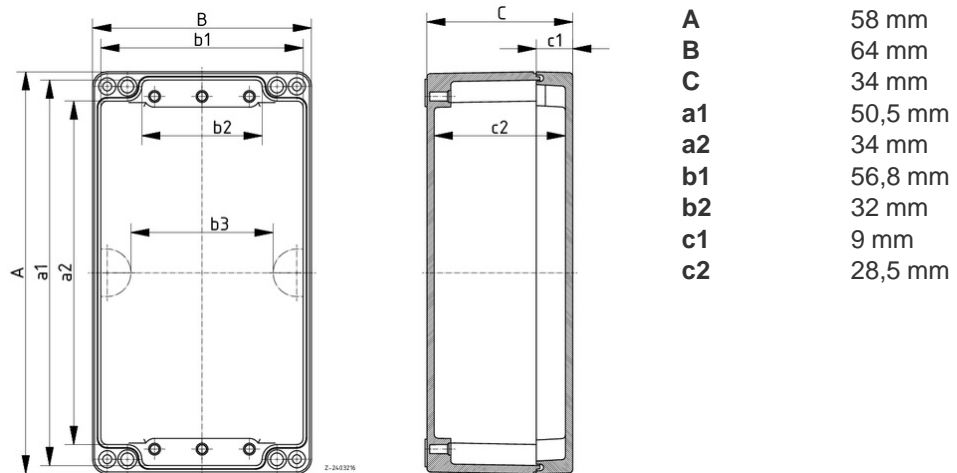

Technical drawings

3D product data in STEP format:

[Registration necessary](#)

Basic drawing for processing work:

[01101000_A-101-G.dxf](#) (2.4 MB)

Catalogue drawing in DXF format:

[01101000_A-101.dxf](#) (472 KB)

Catalogue drawing in PDF format:

[01101000_A-101.pdf](#) (54 KB)

Chapter download

[Euromas-Aluminium F05 enclosure_GB.pdf](#) (607 KB)

Accessories



Capstan-headed screws, sealable

21007915 [KP](#)

For A 100-118



Allen cheese-head screw for lid

21007920 [IS](#)

For A 101-118



DIN rails DIN EN 60715 TH 15

21002650 [TS 15](#)

For A 101



Set of hinges

21007800 [SCHD](#)