

A 116



Euromas-Aluminium
 Euromas enclosure, aluminium

Order no.: 01116000

Colour of enclosure group

Silver grey, similar to RAL 7001; special colours on request. V 215: black, similar to RAL 9005

Protection class

IP 66/DIN EN 60529, higher protection class on request. V 215: IP 65/DIN EN 60529

Enclosure material


G Al Si 12, PU foamed seal; V215: Vestamid, CR seal; for details see Technical Information

Scope of delivery: Lid and base, lid screws made of V2A, earthing screw

Note: * = Available on request. Accessories: See following pages.

A 198: Because of the wall fixing drill holes inside the sealed section of the enclosure, expert sealing of the wall fixing is necessary to attain protection class IP 66.

G = design with transparent lid (PC)

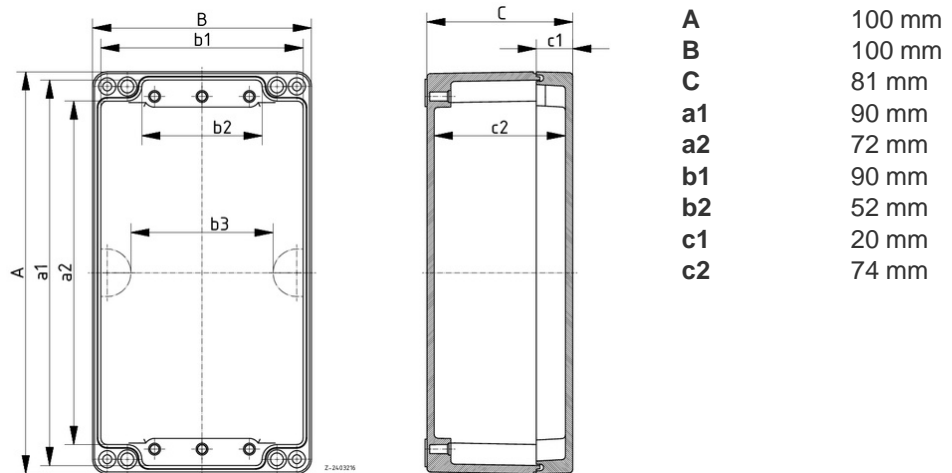

Technical drawings

3D product data in STEP format:

[Registration necessary](#)

Basic drawing for processing work:

[01116000_A-116-G.dxf](#) (300 KB)

Catalogue drawing in DXF format:

[01116000_A-116.dxf](#) (489 KB)

Catalogue drawing in PDF format:

[01116000_A-116.pdf](#) (55 KB)

Chapter download

[Euromas-Aluminium F05 enclosure_GB.pdf](#) (607 KB)

Accessories



Mounting panels, galvanised sheet steel

21001310 [M](#) For A 116



Capstan-headed screws, sealable

21007915 [KP](#) For A 100-118



Allen cheese-head screw for lid

21007920 [IS](#) For A 101-118



Wall brackets, screw-on at rear

21004250 [WL](#) For A 114, A 116, A 118, P 305-322, P 324-329



DIN rails DIN EN 60715 TH 15

21003050 [TS 15](#) For A 116



Set of hinges

21007800 [SCHD](#)