

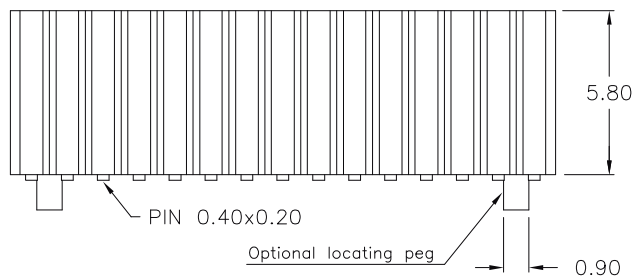
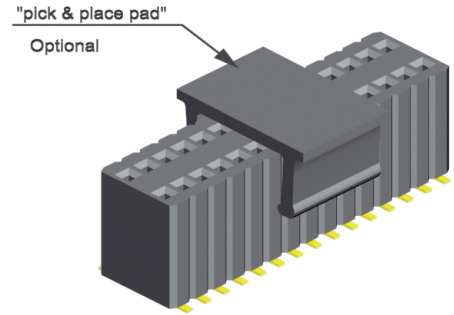


1.27mm x 2.54mm pitch Female Header


- SMT - dual row 6.00mm profile

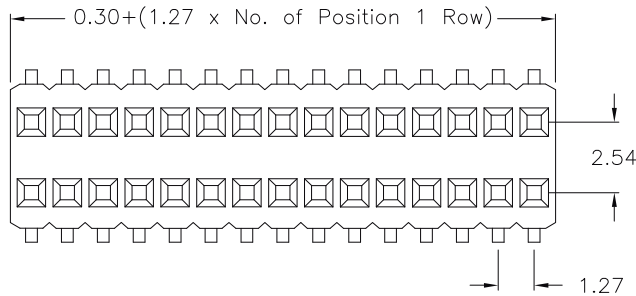

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	-40°C to +105°C
Processing temperature	+250°C +0/-5°C for 10sec.
Contact material	Phosphor Bronze <i>(RoHS compliant)</i>
Insulator material	Nylon UL 94 V-0 <i>(RoHS compliant)</i>

PCB Surface Mount & Hole Layout

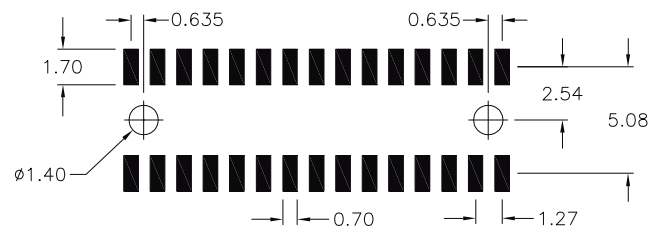

APPLICATION AND FEATURES

Standard: tube packing and without "pick & place pad"

Hi-rel inner contact design, mates with 0.46mm square pin headers

How to order

BS 2 - xxx - H 600 - 55 /1 X

Rows	Nbr of contacts	Plating	Packing and "pick & place pad" Option
2 = dual row	006 to 100	55 = gold	without "locating pegs" A = tube packing; with pick & place pad B = reel packing; with pick & place pad with "locating pegs" C = tube packing; without pick & place pad D = tube packing; with pick & place pad E = reel packing; with pick & place pad