




Mechanical data

Rotation angle: $300^\circ \pm 5^\circ$
 Operating torque: $0.5 \div 1.8$ Ncm
 Permissible torque at end stop: 80 Ncm max
 Permissible axial spindle load: 100 N
 (5 sec max)
 Tap: Z2 at 50% or 57% of rotation
 Weight, std. spindle: ~ 13 g

Electrical data

Rated dissipation @ 40°C:
 2×0.4 W linear law
 2×0.2 W non-linear law
 Limiting element voltage: 500 VDC
 Insulation resistance: ≥ 5 GΩ
 Insulation voltage: 1000 VAC
 Rated resistance: E3 Series; optional E6 Series
 • linear law: 100R to 4M7
 • non-linear law: 1K0 to 2M2
 Tolerance on rated resistance:
 • 100R to 1M0: $\pm 20\%$
 • over 1M0: $\pm 30\%$
 • optional (1K0 to 1M0): $\pm 10\%$
 Resistance law: A, B, C, F, S, T, X
 • with tap: A2, B2, S2
 Matching tolerance Class II

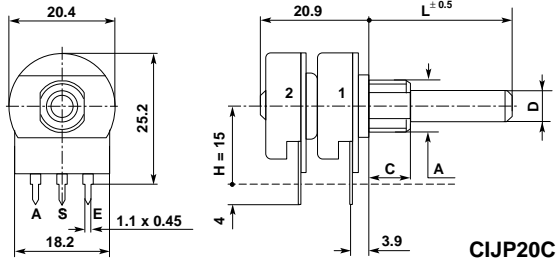


Types

CIJP20C	P.c. terminations
JP20C	Solder tag terminations

Standard spindle & bush

L = 50 mm, plastic, F1 type
 D = 6 mm
 A = M10x0.75, plastic, KC type
 C = 8 mm



H = 22 optional

viewed on component side

Spindle and bushing variations

D mm	A mm	Available types		
		Bush	Plastic Spindle	Metal Spindle
6	M10x0.75	KC, C, CE, CEBS	Fixed Plug-in	Fixed
4	M10x0.75 M7x0.75	C, CE C, CE	Fixed	Fixed

Spindle and bushing details, chassis piercing: see p. 108 to 111

Normalised spindles: see p. 112