

# Zero ohm Resistor


## FEATURES

- Industry's lowest cost
- Excellent long term stability
- Used in all kinds of application
- Max value: 0.01  $\Omega$
- Operating Temperature : -55°C ~+125°C
- Body Color: yellow-brown (biege)
- one black band
- Mini size available (As CR-S type)

## MATERIAL

- Core: High Purity Ceramic Al<sub>2</sub>O<sub>3</sub>
- Termination: Standard solder-plated copper lead
- Coating: Epoxy

## DIMENSION

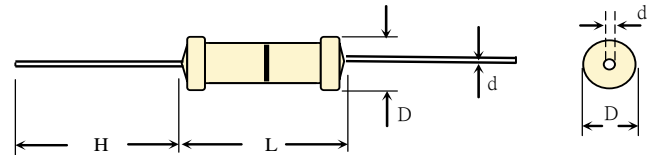

## GENERAL SPECIFICATION

TYPE	DIMENSION (mm)				POWER
	L	D	H	d	
CR-12	3.2±0.2	1.6±0.2	27 ±2.0	0.45± 0.05	1/8W
CR-25	6.0±0.5	2.3±0.3	27 ±2.0	0.55± 0.05	1/4W
CR-50	9.0±0.5	3.0±0.5	27 ±3.0	0.59±0.05	1/2W

## HOW TO ORDER :

Type	Resistance Value	Package
CR1/8W	0 $\Omega$	B=axial bulk
CR1/4W		T= tape/box
CR1/2W		R=tape reel