



SX 7mm height Series

- Features : 105°C 1000 hours , 7.0/9.0mm height
- Recommended Applications : For Portable Micro Computer , Disk Driver , Small Calculator and Audio equipment...etc
- Corresponding product to RoHS


SX
▲ High Temperature SS



Specifications

Item	Characteristics									
Operating Temperature Range	-40 ~ +105°C									
Rated Voltage Range	4 ~ 63VDC									
Rated Capacitance Range	0.1 ~ 470μF									
Capacitance Tolerance	± 20 % at 120Hz , 20°C									
Leakage Current (MAX) (20°C)	I=0.01CV or 3(μA) , whichever is greater. (After rated voltage applied for 2 minutes)									
Dissipation Factor (MAX) (tan δ) (120Hz , 20°C)	WV	4	6.3	10	16	25	35	50	63	
	tan δ	0.35	0.24	0.20	0.17	0.15	0.12	0.10	0.08	
Low Temperature Stability Impedance Ratio (MAX)	WV	4	6.3	10	16	25	35	50	63	
	Z(120Hz)									
	Z-25°C / Z+20°C	6	4	3	2	2	2	2	2	2
	Z-40°C / Z+20°C	12	8	6	4	4	3	3	3	3
Endurance	After applying rated voltage for 1000 hours at 105°C the capacitors shall meet the following requirements.									
	Capacitance Change	Within ± 20 % of initial value								
	Dissipation Factor	Not more than 200% of the specified value								
	Leakage Current	initial specified value or less								
Shelf Life	After placed at 105°C without voltage applied for 500 hours, the capacitors shall meet the same requirement as Endurance.									

Diagram of Dimensions

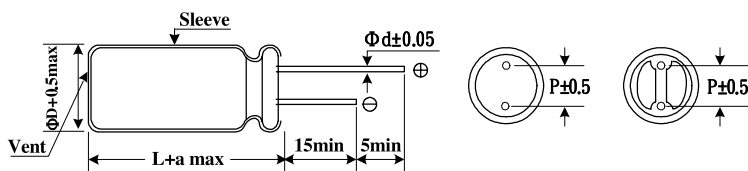

φ D	4.0	5.0	6.3	8.0
P	1.5	2.0	2.5	3.5
φ d	0.45	0.45	0.45	0.5
a	1.0	1.0	1.0	1.0

Multiplier for Ripple Current

Frequency coefficient

Frequency (Hz)	50	120	300	1K	10K
0.1~47μF	0.75	1.00	1.20	1.30	1.50
100~330μF	0.75	1.00	1.10	1.15	1.20

Temperature coefficient

Ambient Temperature (°C)	≤ 50	70	85	105
Coefficient	1.90	1.75	1.40	1.00



SX 7mm height Series

■ Dimensions, Rated Ripple Current

Capacitance (μF)	Rated (Surge) Voltage															
	4 (5)		6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)		63 (79)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1													4x7	1	4x7	1
0.22													4x7	2	4x7	2
0.33													4x7	3	4x7	4
0.47													4x7	5	4x7	6
0.68													4x7	6		
1.0													4x7	10	4x7	13
2.2							4x7	7					4x7	19	4x7	21
3.3							4x7	13					4x7	24	4x7	26
4.7							4x7	19	4x7	24	4x7	24	4x7	29	4x7	26
											5x7	24	5x7	31	6.3x7	33
10							4x7	29	4x7	33	4x7	34	4x7	37	5x7	42
									5x7	35	5x7	36	5x7	45	6.3x7	50
									6.3x7	35			6.3x7	45		
22			4x7	37	4x7	31	4x7	36	4x7	43	5x7	48	6.3x7	65		
					5x7	38	5x7	44	5x7	51	6.3x7	57				
									6.3x7	53						
33	4X7	30	5x7	42	4x7	39	4x7	50	5x7	55	6.3x7	70				
					5x7	47	5x7	57	6.3x7	65						
47	4X7	35	4x7	46	4x7	50	5x7	75	5x7	67	6.3x7	81				
			5x7	55	5x7	60	6.3x7	77	6.3x7	79						
					6.3x7	60										
68							5x7	84								
100	5X7	55	5x7	75	5x7	85	5x7	94	6.3x7	120						
			6.3x7	90	6.3x7	100	6.3x7	110	8x7	120						
150							6.3x7	120								
220	6.3X7	95	6.3x7	130	6.3x7	135	8x7	140								
							8x9	140								
330			8x7	140			8x9	155								
470					8x9	165										

☆ Size: D φ x L (mm) ☆ Ripple Current: (mA/rms), 105°C, 120Hz