

**Cliff Electronic Components Ltd.**

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,

Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

---

**FIBER OPTIC DATA LINK**

**DATA SHEET**

MODEL NO : FCR6842032R

DATE : 03-05-2018

VERSION : 1.0

DEVICE NO. : ORJ3 (OPTICAL RECEIVER JACK)

| CUSTOMER | DESIGNER | CHECKER | APPROVER |
|----------|----------|---------|----------|
|          |          |         |          |

# Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,  
Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

---

## Features

- High PD sensitivity for red light
- High speed up to 16 Mbps
- Low power consumption and current dissipation
- +3~+5V power source

## Descriptions

The light receiving unit is a standard-package product with connector and opto-electric component packaged with PD and I/V amplifier IC. The function of unit changes the light signal into electric signal.

The unit is operated at +3~+5V and the input signal is TTL compatible. The DLR1121 has a maximum operating speed of 16 Mbps.

## Applications

- Audio equipment
- Digital optical data link
- MD
- Sound card



## Device Selection Guide

| Chip        |                     | Operating Voltage (Vcc) | Dissipation Current(mA)<br>Typ. | Fiber Coupling Light Output (dBm) |      |       |
|-------------|---------------------|-------------------------|---------------------------------|-----------------------------------|------|-------|
| IC Material | LED $\lambda$ p(nm) |                         |                                 | Min.                              | Typ. | Max.  |
| Si          | 650                 | 2.7~5.5                 | 6.5                             | -24                               | -    | -14.5 |


---

# Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,  
Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk


## Package Dimensions

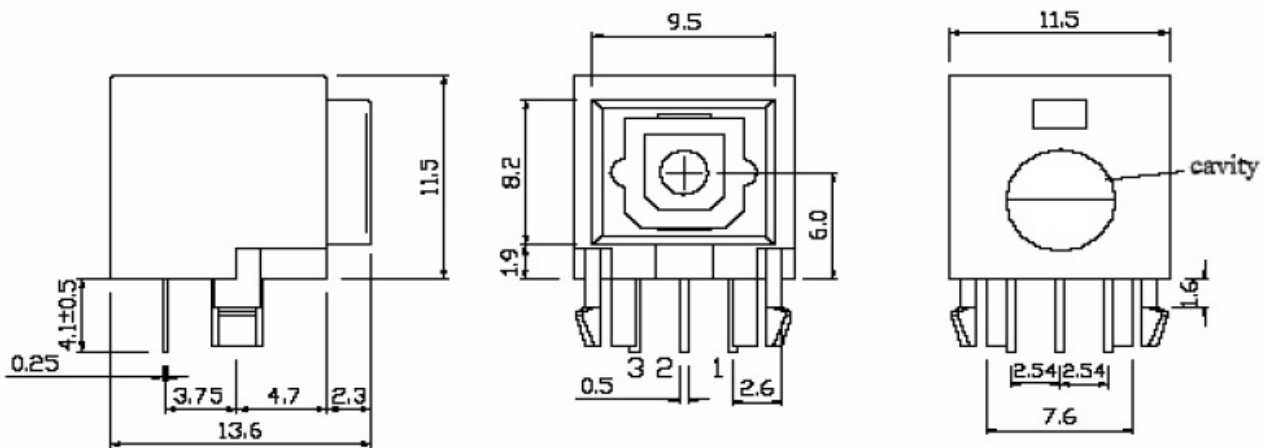

- Notes:** 1. All dimensions are in millimeters.  
2. General Tolerance:  $\pm 0.2$ mm

## Pin Function

1. Vout
2. GND
3. Vcc

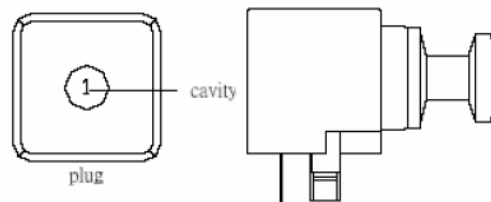

## Absolute Maximum Ratings( Ta = 25°C )

| Parameter             | Symbol | Rating    | Unit |
|-----------------------|--------|-----------|------|
| Supply Voltage        | Vcc    | 5.5       | V    |
| Storage Temperature   | Tstg   | -30 to 80 | °C   |
| Operating Temperature | Topr   | -20 to 70 | °C   |
| Soldering Temperature | Tsol   | 260*      | °C   |

\* Soldering time  $\leq 5$ s / 2 times.

\*Don't touch flux soldering and white Gas

## Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,

Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

---

### Electro-Optical Characteristics

| Parameter                         | Symbol           | Conditions        | MIN. | TYP. | MAX.  | Unit |
|-----------------------------------|------------------|-------------------|------|------|-------|------|
| Operating Voltage                 | V <sub>cc</sub>  | -                 | 2.7  | -    | 5.5   | V    |
| Peak Detective Wavelength         | $\lambda_p$      | -                 | -    | 650  | -     | nm   |
| Transfer Speed                    |                  | NRZ signal        | 0.1  | -    | 16    | Mbps |
| Receiving Distance                |                  | Using APF         | 0.2  | -    | 20    | m    |
| Pulse Width Distortion            | $\Delta tw$      | 16Mbps NRZ Signal | -20  | -    | 20    | ns   |
| Input Light power                 | P <sub>i</sub>   | *1                | -24  | -    | -14.5 | dBm  |
| Dissipation Current               | I <sub>cc</sub>  | *2                | -    | 6    | 10    | mA   |
| High Level Output Voltage         | V <sub>OH</sub>  |                   | 2.4  | -    | -     | v    |
| Low Level Output Voltage          | V <sub>OL</sub>  |                   | -    | -    | 0.4   | v    |
| Rise Time                         | t <sub>r</sub>   | *3                | -    | -    | 25    | ns   |
| Fall Time                         | t <sub>f</sub>   | *3                | -    | -    | 25    | ns   |
| Low → High propagation delay time | t <sub>PLH</sub> | *3                | -    | -    | 100   | ns   |
| High → Low propagation delay time | t <sub>PHL</sub> | *3                | -    | -    | 100   | ns   |
| Jitter time                       | $\Delta t_j$     | *3                | -    | 1.5  | 15    | ns   |

FCR6842032R light receiving unit satisfies EIAJ CP-1201 digital audio interface standard.

---

## Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,  
Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: [www.cliffuk.co.uk](http://www.cliffuk.co.uk)

### Reliability Test Items

| No. | Item                          | Test Condition  | Test Hour/Cycle  | Samples | Number (n)<br>Failure (c) |
|-----|-------------------------------|---|--|---------|---------------------------|
| 1   | Soldering Heat                | 260°C±5°C   | 5 sec./2times  | 22      | n=22, c=0                 |
| 2   | High temp. &<br>Hum. storage  | Ta=40°C, 90%RH  | 500  | 22      | n=22, c=0                 |
| 3   | High temp.<br>storage         | Ta=80°C   | 500  | 22      | n=22, c=0                 |
| 4   | Low Temp.<br>storage          | Ta=-30°C  | 500  | 22      | n=22, c=0                 |
| 5   | Temp. cycling                 | -30°C ~ 80°C<br>(30min) (5min) (30min)  | 20   | 22      | n=22, c=0                 |
| 6   | High Temp.<br>Operation life  | Ta=60°C, Vcc=5V ON  | 500  | 22      | n=22, c=0                 |
| 7   | Repeated<br>operation         | 500 times   | Coupling force < 2 kg<br>0.4kg<Detaching<br>force <2kg | 22      | n=22, c=0                 |
| 8   | Terminal<br>Strength(tension) | Weight: 500 g<br>30 sec./each terminal  |  | 22      | n=22, c=0                 |
| 9   | Terminal<br>Strength(bending) | Weight: 500 g<br>2 times/each terminal  |  | 22      | n=22, c=0                 |
| 10  | Mechanical<br>Shock           | Acceleration: 1000m/s <sup>2</sup><br>Pulse width: 6 ms<br>3 times/ X,Y,Z direction         |  | 22      | n=22, c=0                 |
| 11  | Vibration                     | Frequency range: 10~55<br>Hz /sweep 1 min<br>Overallamplitude:1.5 mm<br>2H./X,Y,Z direction |  | 22      | n=22, c=0                 |

I<sub>cc</sub> (dissipation current): CURRENT ATTENUATE DIFFERENCE < 20%

T<sub>PLH</sub> (propagation L → H delay time): DELAY TIME DIFFERENCE < 20%

T<sub>PHL</sub> (propagation H → L delay time): DELAY TIME DIFFERENCE < 20%

T<sub>r</sub> (rise time): TIME DIFFERENCE < 20%

# Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,


Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk


Tf (fall time): TIME DIFFERENCE < 20%

## Measuring Method


\*1 Maximum receiver input optical power/Minimum receiver input optical power

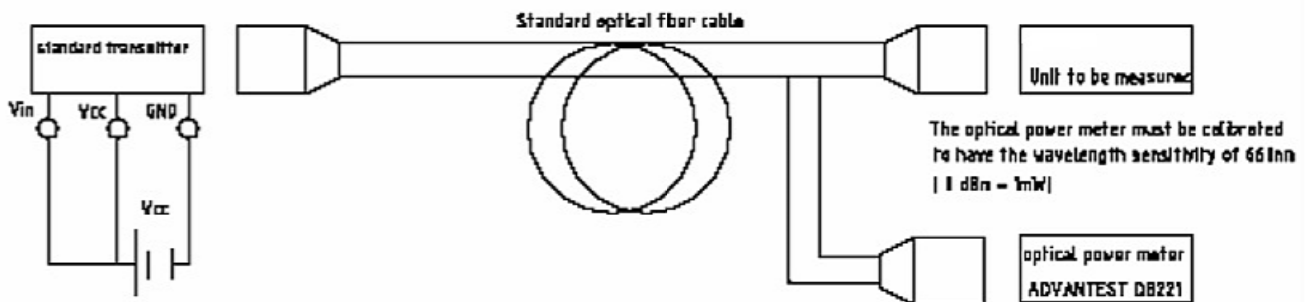

\*2 Current dissipation measuring method

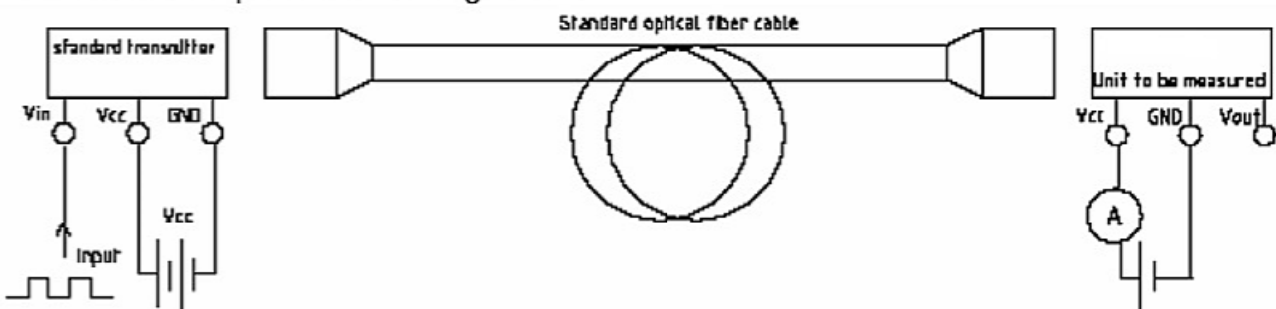

\*3 Pulse response and jitter measuring method

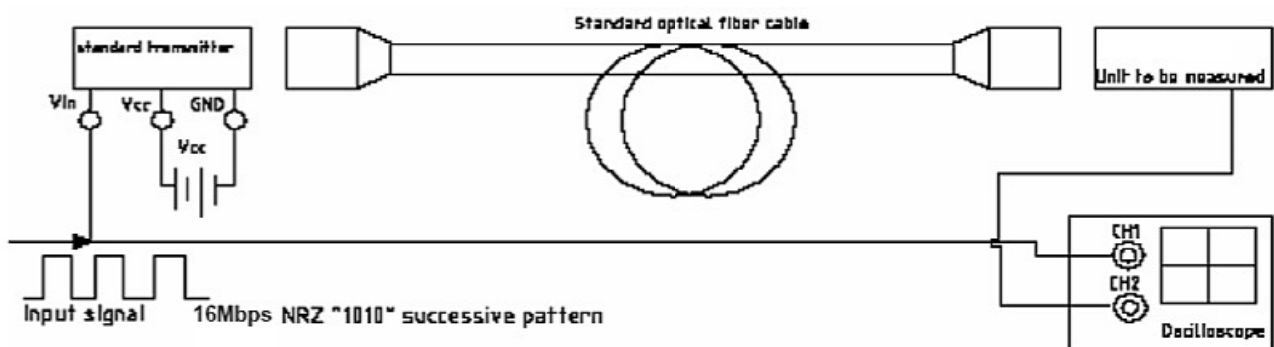


# Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,

Redhill, Surrey, RH1 2PF, England, UK

Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

## PCB Layout For Electrical Circuit

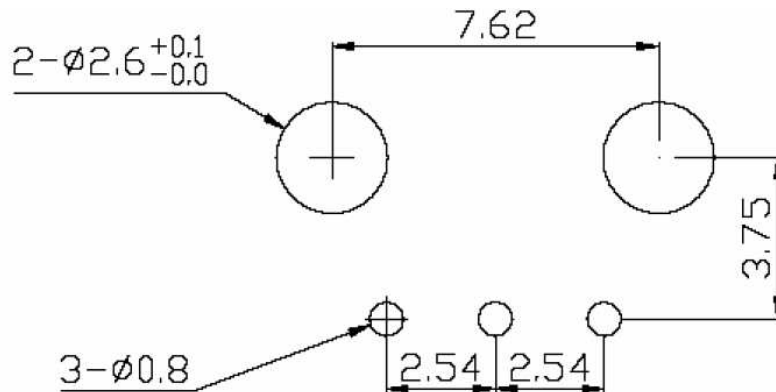

### Notes:

1. Unit: mm
2. Unspecified tolerance:  $\pm 0.3$ mm
3. Substrate Thickness: 1.6mm

### Precautions for Using Method

1. Connect a by-pass capacitor (0.1  $\mu$ F) close to FCR6842032R within 7 mm of the unit lead frame.
2. Connect a by-pass capacitor (30pF) between GND and Vout avoid loading effect.
3. Take proper electrostatic-discharge (ESD) precautions while handling these devices. These devices are sensitive to ESD.

