


FBNAB3100ZG110

KEMET, FBN, EMI/RFI Filters, Noise Suppression, 250 V, 10 A, 55x51x24mm

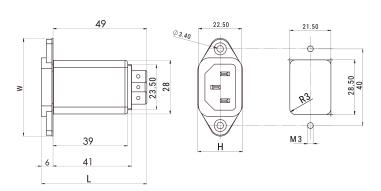

Click here for the 3D model.

Dimensions	
L	55mm NOM
W	51mm NOM
Н	23.5mm NOM
Lead	Fast On

Packaging Specifications	
Packaging	Bulk
Packaging Quantity	1

General Information	
Series	FBN
Style	Chassis Mount
Description	Compact, Lightweight with metalic enclosure
Features	Compact, lightweight
RoHS	Yes
Qualifications	IEC/EN 60939, UL, CSA
Lead	Fast On
Terminal Type	Faston

Specifications	,
Voltage	250 VAC, 1700 VDC (Test P to P), 3000 VDC
	(Test P to E)
Rated Frequency	50-60 Hz
Rated Current	10 A
Ripple Current	10 A
Rated Temperature	40°C
Temperature Range	-25/+85°C
Climate Category	25/085/21
Test Voltage DC (P	1700 VDC
to P)	
Test Voltage DC (P	3000 VDC
to E)	
Leakage Current	0.21 mA (MAX)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.