

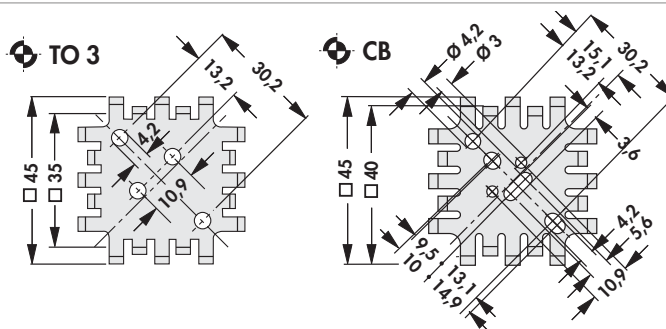



art. no.	↑ [mm]	R _{th} [K/W]	⊗
FK 254 SA 3	25.4	5.8	TO 3
FK 318 SA	31.8	4.8	without
FK 318 SA 3	31.8	4.8	TO 3
material:	die-casting aluminium		
surface:	black lacquered		



art. no.	↑ [mm]	R _{th} [K/W]	⊗
FK 201 SA	25.4	6	without
FK 201 SA 3	25.4	6	TO 3
FK 201 SA CB	25.4	6	CB
FK 202 SA	12.7	8	without
FK 202 SA 3	12.7	8	TO 3
FK 202 SA CB	12.7	8	CB



⊗ L (TO 3 – SOT 9 + TO 66 – SOT 32 – TO220)



art. no.	↑ [mm]	R _{th} [K/W]	⊗
FK 205 SA L	31.8	9.0	L
FK 206 SA L	25.4	10.5	L
FK 207 SA L	19.1	12.0	L
FK 208 SA L	12.7	14.0	L
material:	aluminium		
surface:	black anodised		

Attachable heatsinks
Heatsinks for TO 5 and TO 18
Heatsinks for D PAK
Aluminium oxide wafers

→ C 10 – 14
→ C 17 – 19
→ C 21 – 120
→ E 15 – 16

Mounts
Insulating caps
Thermal conductive material
Technical introduction

→ E 42 – 46
→ E 49
→ E 2 – 22
→ A 2 – 7