

Features:

- High segment intensity
- Wide viewing angle
- Range of colours
- Grey face colour
- White segment colour

Available options:

- Alternative face and segment colour
- Alternative font
- Cropped terminal pins
- Alternative emitting colour
- Low current version

Font design

Product not shown
actual size



Electro / Optical Characteristics - $I_F = 20 \text{ mA}$ (* HE Blue - $I_F = 10 \text{ mA}$) $T_a = 25^\circ \text{ C}$

Part Number Common Cathode	Part Number Common Anode	Emitting Colour	Wavelength Peak λ_P	Segment Fwd Voltage V_F		Luminous Intensity I_V	
				typical	max	min	typical
FN1-3001L00GW	FN1-3002L00GW	GaAlAs Red	660	11.10	12.00	-	240
FN1-3001300GW	FN1-3002300GW	HE Red	640	12.30	15.00	-	60
FN1-3001Y05300GW	FN1-3002Y05300GW	Yellow	591	12.30	14.40	-	370
FN1-3001200GW	FN1-3002200GW	Green	568	12.600	15.00	-	110
FN1-3001B0500GW	FN1-3002B0500GW	* HE Blue	465	22.20	24.00	-	80
FN1-3001B0100GW	FN1-3002B0100GW	Blue	428	22.80	27.00	-	50
Units			nm	V		mcd / seg. (digit average)	



Maximum Ratings $T_a = 25^\circ \text{ C}$ - Derate above 25° C

Characteristic	Condition	Symbol	Rating	Units
Pulse Forward Current	0.1 duty cycle @ 1KHz (HE Blue)	I_{FP}	100 (35)	mA
DC Forward Current	(HE Blue)	I_F	25 (15)	mA
Reverse Voltage	$I_R = 10 \mu\text{A}$	V_R	5	V
Operating Temperature		T_{opr}	- 25 to + 80	$^\circ \text{ C}$
Storage Temperature		T_{stg}	- 30 to + 85	$^\circ \text{ C}$
Lead soldering temperature	1.6 mm from body - max 3 seconds		260	$^\circ \text{ C}$


Note

Industry standard procedures regarding static must be observed when handling product produced with blue die material.


Package Outline

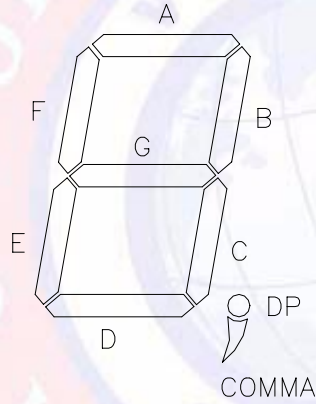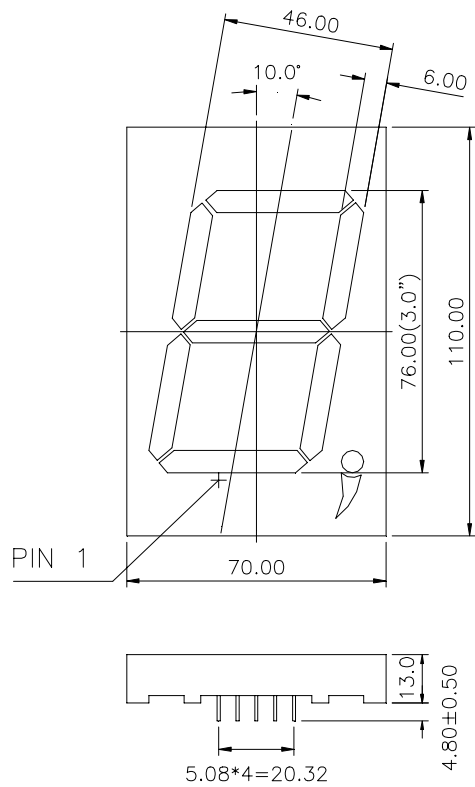

Common Cathode

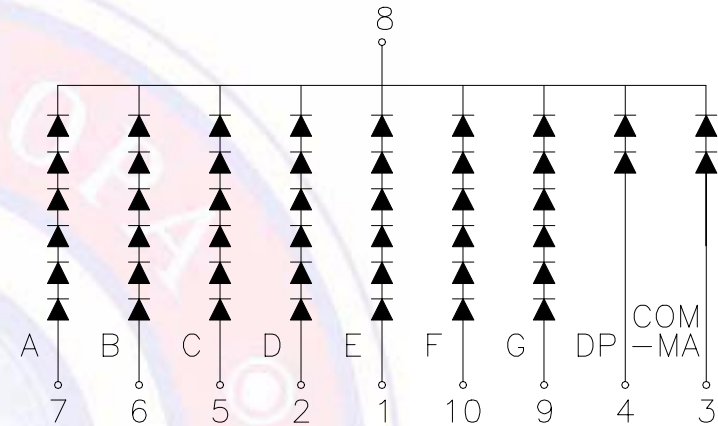

Common Anode

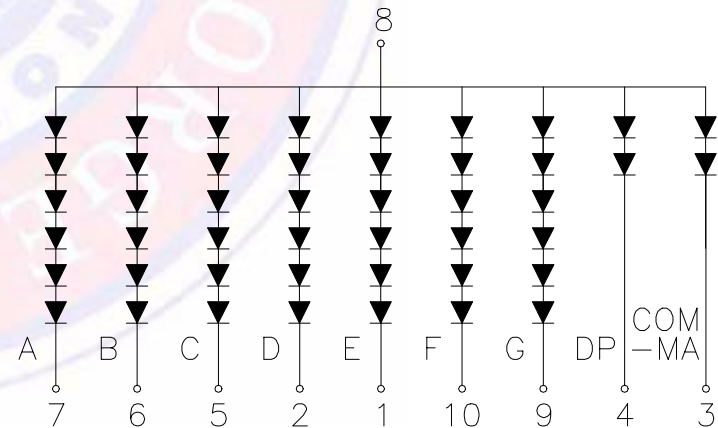

Tolerance ± 0.25 mm unless stated