



Spacers with internal and external thread

- other lengths and threads on request
- ... please indicate length "L"

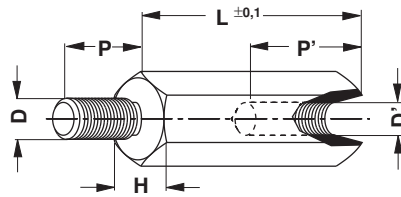

art. no.	dim. [mm]				
	H	D/D'	L	P	P'
GBM 2550 ...	5	M2.5	5	6	2.5
GBM 2550 ...	5	M2.5	10	6	5.0
GBM 2550 ...	5	M2.5	15/ 20	6	8.0
GBM 2550 ...	5	M2.5	25/ 30/ 35	8	10.0
GBM 3050 ...	5	M3	5	8	2.5
GBM 3050 ...	5	M3	10/ 12/ 14	8	5.0
GBM 3050 ...	5	M3	15/ 18/ 20	8	10.0
GBM 3050 ...	5	M3	25/ 30/ 35/ 40/ 45/ 50	10	10.0
GBM 4070 ...	7	M 4	5	8	2.5
GBM 4070 ...	7	M 4	10	8	5.0
GBM 4070 ...	7	M 4	15	8	8.0
GBM 4070 ...	7	M 4	20	8	10.0
GBM 4070 ...	7	M 4	25/ 30/ 35/ 40/ 45/ 50	10	10.0
GBM 5080 ...	8	M 5	10	8	5.0
GBM 5080 ...	8	M 5	15/ 20	8	6.0
GBM 5080 ...	8	M 5	25/ 30/ 35/ 40/ 45/ 50	10	10.0
material:	brass				
surface:	6 µm nickel-plated, solderable				

- other lengths and threads on request
- ... please indicate length "L"

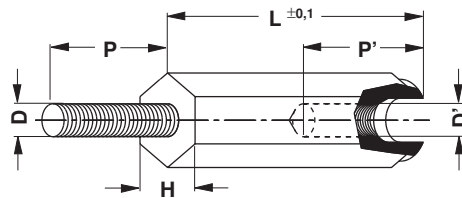

art. no.	dim. [mm]				
	H	D/D'	L	P	P'
GBP 3060 ...	6	M3	10	8	7
GBP 3060 ...	6	M3	12	8	8
GBP 3060 ...	6	M3	15/ 18/ 20/ 25/ 30	8	10
GBP 4080 ...	8	M 4	10	8	7
GBP 4080 ...	8	M 4	12	8	9
GBP 4080 ...	8	M 4	15/ 18/ 20/ 25/ 30/ 35/ 40/ 45	8	10
material:	polyamide, GF reinforced				
temperature range:	-30 °C ... +110 °C				
colour:	black				