


## H05V-K <HAR>

European <HAR> cable type certification

H05V-K, HAR, power and control cable, PVC, 300/500V, wiring of devices and control cabinets, flame-retardant, class 5/fine wire, fixed installation, ring/spool

### Info

CPR: Article number choice under [www.lappkabel.com/cpr](http://www.lappkabel.com/cpr)  
<HAR>

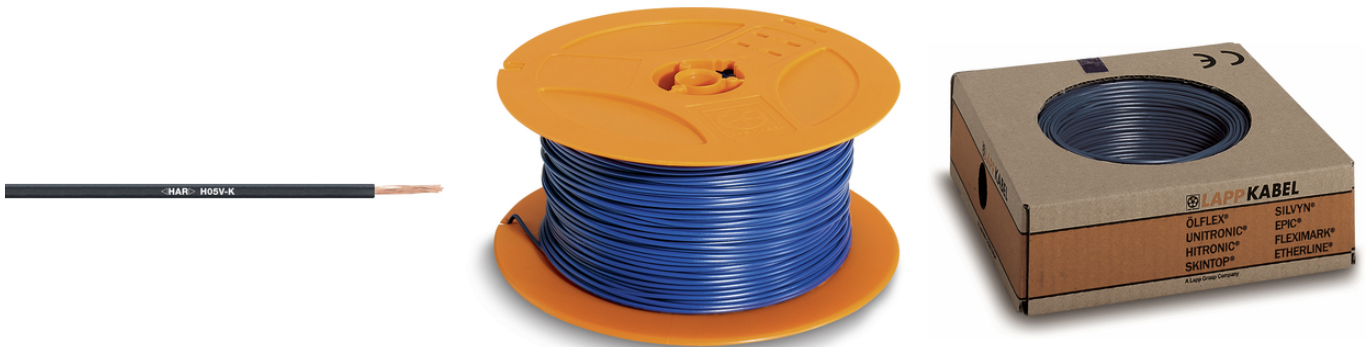

### Benefits

Cables' <HAR>marking also stands for the international endorsement of national certification institutes' testing marks and certificates, e. g. <VDE><HAR>. The <HAR>marking is of special importance in case of goods traffic between European countries.

### Application range

Internal wiring of devices  
Protected installation in and on lighting equipments  
Signal systems in and on plaster in tubes

### Product features

Flame-retardant according IEC 60332-1-2  
Spool: d1 = 18 mm; d2 = 200 mm; b = 85 mm

### Norm references / Approvals

<HAR> cable type certification acc. EN 50525-2-31

### Product Make-up

Fine-wired copper conductor of bare copper strands in line with conductor class 5 acc. IEC 60228  
Core insulation: Based on PVC

### Technical Data

Last Update (23.05.2019)  
©2019 Lapp Group - Technical changes reserved  
Product Management [www.lappkabel.de](http://www.lappkabel.de)  
You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03.16

## H05V-K <HAR>

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000993 ETIM 5.0 Class-Description: Single core cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000993 ETIM 6.0 Class-Description: Single core cable
Conductor stranding:	Fine wire according to VDE 0295 Class 5/ IEC 60228 Class 5
Minimum bending radius:	According to EN 50565-1 4 x outer diameter (OD) for normal use; 2 x OD for cautions bending
Nominal voltage:	U0/U: 300/500 V
Test voltage:	2000 V
Current rating:	VDE 0298 Part 4 EN 50565-1/ VDE 0298-565-1
Temperature range:	Fixed installation: -40°C to +80°C Moved: +5°C to +70°C

### Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

## H05V-K &lt;HAR&gt;

Article number	Conductor cross-section (mm²)	Outer diameter [mm]	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510001	0.5	2.1 - 2.5	green/yellow	100	-	4.8	9
4510011	0.5	2.1 - 2.5	black	100	-	4.8	9
4510021	0.5	2.1 - 2.5	blue	100	-	4.8	9
4510141	0.5	2.1 - 2.5	dark blue	100	-	4.8	9
4510031	0.5	2.1 - 2.5	brown	100	-	4.8	9
4510111	0.5	2.1 - 2.5	yellow	100	-	4.8	9
4510121	0.5	2.1 - 2.5	green	100	-	4.8	9
4510071	0.5	2.1 - 2.5	violet	100	-	4.8	9
4510081	0.5	2.1 - 2.5	pink	100	-	4.8	9
4510091	0.5	2.1 - 2.5	orange	100	-	4.8	9
4510041	0.5	2.1 - 2.5	red	100	-	4.8	9
4510051	0.5	2.1 - 2.5	white	100	-	4.8	9
4510061	0.5	2.1 - 2.5	grey	100	-	4.8	9
4510161	0.5	2.1 - 2.5	ultra-marine blue	100	-	4.8	9
4510921	0.5	2.1 - 2.5	Dark blue/white	100	-	4.8	9
4510002	0.75	2.2 - 2.7	green/yellow	100	-	7.2	12
4510012	0.75	2.2 - 2.7	black	100	-	7.2	12
4510022	0.75	2.2 - 2.7	blue	100	-	7.2	12
4510142	0.75	2.2 - 2.7	dark blue	100	-	7.2	12
4510032	0.75	2.2 - 2.7	brown	100	-	7.2	12
4510112	0.75	2.2 - 2.7	yellow	100	-	7.2	12
4510122	0.75	2.2 - 2.7	green	100	-	7.2	12
4510072	0.75	2.2 - 2.7	violet	100	-	7.2	12
4510082	0.75	2.2 - 2.7	pink	100	-	7.2	12
4510092	0.75	2.2 - 2.7	orange	100	-	7.2	12
4510042	0.75	2.2 - 2.7	red	100	-	7.2	12
4510052	0.75	2.2 - 2.7	white	100	-	7.2	12
4510062	0.75	2.2 - 2.7	grey	100	-	7.2	12
4510922	0.75	2.2 - 2.7	Dark blue/white	100	-	7.2	12
4510162	0.75	2.2 - 2.7	ultra-marine blue	100	-	7.2	12
4510003	1	2.4 - 2.8	green/yellow	100	-	9.6	15
4510013	1	2.4 - 2.8	black	100	-	9.6	15
4510023	1	2.4 - 2.8	blue	100	-	9.6	15
4510143	1	2.4 - 2.8	dark blue	100	-	9.6	15

Last Update (23.05.2019)

©2019 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

 You can find the current technical data in the corresponding data sheet.  
 PN 0456 / 02\_03\_16

**H05V-K <HAR>**

Article number	Conductor cross-section (mm <sup>2</sup> )	Outer diameter [mm]	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510033	1	2.4 - 2.8	brown	100	-	9.6	15
4510113	1	2.4 - 2.8	yellow	100	-	9.6	15
4510123	1	2.4 - 2.8	green	100	-	9.6	15
4510073	1	2.4 - 2.8	violet	100	-	9.6	15
4510083	1	2.4 - 2.8	pink	100	-	9.6	15
4510093	1	2.4 - 2.8	orange	100	-	9.6	15
4510043	1	2.4 - 2.8	red	100	-	9.6	15
4510053	1	2.4 - 2.8	white	100	-	9.6	15
4510063	1	2.4 - 2.8	grey	100	-	9.6	15
4510163	1	2.4 - 2.8	ultra-marine blue	100	-	9.6	15
4510923	1	2.4 - 2.8	Dark blue/white	100	-	9.6	15
4510001S	0.5	2.1 - 2.5	green/yellow	-	250	4.8	9
4510011S	0.5	2.1 - 2.5	black	-	250	4.8	9
4510021S	0.5	2.1 - 2.5	blue	-	250	4.8	9
4510141S	0.5	2.1 - 2.5	dark blue	-	250	4.8	9
4510031S	0.5	2.1 - 2.5	brown	-	250	4.8	9
4510111S	0.5	2.1 - 2.5	yellow	-	250	4.8	9
4510121S	0.5	2.1 - 2.5	green	-	250	4.8	9
4510071S	0.5	2.1 - 2.5	violet	-	250	4.8	9
4510091S	0.5	2.1 - 2.5	orange	-	250	4.8	9
4510041S	0.5	2.1 - 2.5	red	-	250	4.8	9
4510051S	0.5	2.1 - 2.5	white	-	250	4.8	9
4510061S	0.5	2.1 - 2.5	grey	-	250	4.8	9
4510002S	0.75	2.2 - 2.7	green/yellow	-	250	7.2	12
4510012S	0.75	2.2 - 2.7	black	-	250	7.2	12
4510022S	0.75	2.2 - 2.7	blue	-	250	7.2	12
4510142S	0.75	2.2 - 2.7	dark blue	-	250	7.2	12
4510032S	0.75	2.2 - 2.7	brown	-	250	7.2	12
4510112S	0.75	2.2 - 2.7	yellow	-	250	7.2	12
4510122S	0.75	2.2 - 2.7	green	-	250	7.2	12
4510072S	0.75	2.2 - 2.7	violet	-	250	7.2	12
4510082S	0.75	2.2 - 2.7	pink	-	250	7.2	12
4510092S	0.75	2.2 - 2.7	orange	-	250	7.2	12
4510102S	0.75	2.2 - 2.7	transparent	-	250	7.2	12

Last Update (23.05.2019)

©2019 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

 You can find the current technical data in the corresponding data sheet:  
 PN 0456 / 02\_03\_16

**H05V-K <HAR>**

Article number	Conductor cross-section (mm <sup>2</sup> )	Outer diameter [mm]	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510042S	0.75	2.2 - 2.7	red	-	250	7.2	12
4510052S	0.75	2.2 - 2.7	white	-	250	7.2	12
4510062S	0.75	2.2 - 2.7	grey	-	250	7.2	12
4510162S	0.75	2.2 - 2.7	ultra-marine blue	-	250	7.2	12
4510003S	1	2.4 - 2.8	green/yellow	-	250	9.6	15
4510013S	1	2.4 - 2.8	black	-	250	9.6	15
4510023S	1	2.4 - 2.8	blue	-	250	9.6	15
4510143S	1	2.4 - 2.8	dark blue	-	250	9.6	15
4510033S	1	2.4 - 2.8	brown	-	250	9.6	15
4510123S	1	2.4 - 2.8	green	-	250	9.6	15
4510073S	1	2.4 - 2.8	violet	-	250	9.6	15
4510093S	1	2.4 - 2.8	orange	-	250	9.6	15
4510103S	1	2.4 - 2.8	transparent	-	250	9.6	15
4510043S	1	2.4 - 2.8	red	-	250	9.6	15
4510053S	1	2.4 - 2.8	white	-	250	9.6	15
4510063S	1	2.4 - 2.8	grey	-	250	9.6	15
4510163S	1	2.4 - 2.8	ultra-marine blue	-	250	9.6	15
Maxi ring							
4510011X	0.5	2.1 - 2.5	black	600	-	4.8	9
4510021X	0.5	2.1 - 2.5	blue	600	-	4.8	9
4510141X	0.5	2.1 - 2.5	dark blue	600	-	4.8	9
4510061X	0.5	2.1 - 2.5	grey	600	-	4.8	9
4510041X	0.5	2.1 - 2.5	red	600	-	4.8	9
4510051X	0.5	2.1 - 2.5	white	600	-	4.8	9
4510012X	0.75	2.2 - 2.7	black	500	-	9.6	13
4510022X	0.75	2.2 - 2.7	blue	500	-	7.2	13
4510142X	0.75	2.2 - 2.7	dark blue	500	-	7.2	13
4510002X	0.75	2.2 - 2.7	green/yellow	500	-	7.2	13
4510062X	0.75	2.2 - 2.7	grey	500	-	7.2	13
4510092X	0.75	2.2 - 2.7	orange	500	-	7.2	13
4510042X	0.75	2.2 - 2.7	red	500	-	7.2	13
4510072X	0.75	2.2 - 2.7	violet	500	-	7.2	13
4510052X	0.75	2.2 - 2.7	white	500	-	7.2	13
4510013X	1.0	2.4 - 2.8	black	400	-	9.6	15

Last Update (23.05.2019)

©2019 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

 You can find the current technical data in the corresponding data sheet.  
 PN 0456 / 02\_03\_16

**H05V-K <HAR>**

Article number	Conductor cross-section (mm <sup>2</sup> )	Outer diameter [mm]	Core colour	m/ring	m/spool	Copper index (kg/km)	Weight (kg/km)
4510033X	1.0	2.4 - 2.8	brown	400	-	9.6	15
4510023X	1.0	2.4 - 2.8	blue	400	-	9.6	15
4510143X	1.0	2.4 - 2.8	dark blue	400	-	9.6	15
4510003X	1.0	2.4 - 2.8	green/yellow	400	-	9.6	15
4510063X	1.0	2.4 - 2.8	grey	400	-	9.6	15
4510093X	1.0	2.4 - 2.8	orange	400	-	9.6	15
4510043X	1.0	2.4 - 2.8	red	400	-	9.6	15
4510053X	1.0	2.4 - 2.8	white	400	-	9.6	15

Last Update (23.05.2019)

©2019 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03\_16

## H05V-K <HAR>

