

ROHS Compliant



# 台灣駿品端子股份有限公司




TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號



TEL:886-2-26895596.26886112 FAX:886-2-26886110

E-mail:info@tkp.com.tw


http://www.tkp.com.tw

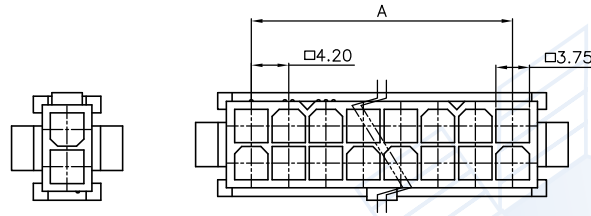

H6657P-02


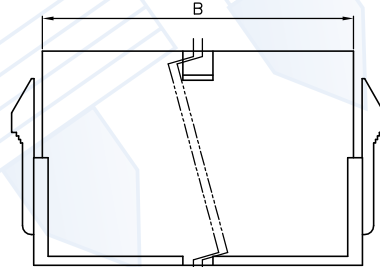


H6657P-04~24

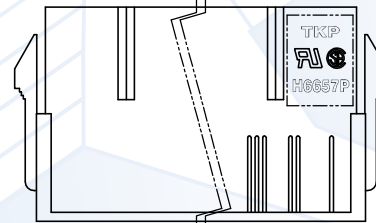

**NOTE**

- \* Material : Nylon UL 94V-2 or UL 94V-0
- \* Color : As below
- \* Electrical rating : UL 250V 5A , AC/DC  
CSA 250V 4A , AC/DC  
TUV 250V 7A AC / DC
- \* With Mtg . Ear (H6657P)
- \* Accepts 6657TR(LF) terminal
- \* Mates with H6657R1 receptacle housings
- \* Dual row , 2-24 circuits available

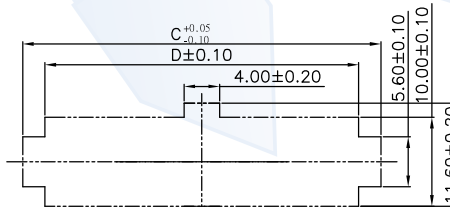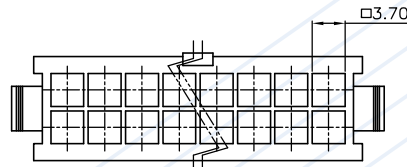

RECOMMENDED PANEL HOLE DIMENSION  
(THICKNESS : 0.80-2.0)

Circuits	Part No.	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Part No.	Dim. A	Dim. B	Dim. C	Dim. D
2	H6657P-02	—	5.50	10.90	5.90	14	H6657P-14	25.20	30.70	36.10	31.10
4	H6657P-04	4.20	9.70	15.10	10.10	16	H6657P-16	29.40	34.90	40.30	35.30
6	H6657P-06	8.40	13.90	19.30	14.30	18	H6657P-18	33.60	39.10	44.50	39.50
8	H6657P-08	12.60	18.10	23.50	18.50	20	H6657P-20	37.80	43.30	48.70	43.70
10	H6657P-10	16.80	22.30	27.70	22.70	22	H6657P-22	42.00	47.50	52.90	47.90
12	H6657P-12	21.00	26.50	31.90	26.90	24	H6657P-24	46.20	51.70	57.10	52.10



PART NO.	H6657P-XX			Part NO.	Material	Color/Finish	Remark	APPROVAL
TITLE	4.20mm Wire to Wire			H6657P	Nylon UL 94V-2	Natural		DRAWN: 詹雅茹
THIRD ANGLE	SCALE	UNIT	SHEET NO	H6657P-XX-V0	Nylon UL 94V-0	White		CHECKED: 張明遠
	1.5:1	mm	1/1	H6657P-XXOR	Nylon UL 94V-2	Orange		APPROVE: 陳泓宇
	420-013		C420-002	TOLERANCE	DATE	ODD NUMBERS	REV	
				.X± 0.30 .XXX±0.10	2011.03.07	ENG950764	A2	
				.XX± 0.20 ANGLE±2°				