

8600 Rocker Switches - Miniature 10A 250Vac Single & Double Pole



10(4)A 250Vac T90 (unless noted below)



UL CSA See ratings below
UL 65°C, file E45221, CSA file LR10990

In house test

Inrush 25A to EN61058-1 & 10A 28Vdc

3mm contact gap except where marked μ

Technical data on pages 4 & 5 (switches), 66 (indicators)

H 8653 V B ---

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER
H 4.8 x 0.8 7.4	Approvals & ratings vary with function On Off Switches are ON when pressed over terminal 3 	V Curved
T 3.5 x 0.8 Solder 6.4	8600 \blacklozenge ON - OFF 10(4)A 16A 250V, 10A 277V 	8650 \blacklozenge ON - OFF 10(4)A 10A 277V
X 3.7 5.3 PCB* 0.8 Sq	8601 ON - OFF (momentary ON) 6(1)A 16A 250V, 6A 277V 	8651 ON - OFF (momentary ON) 6(1)A 6A 277V
	8602 ON - OFF (momentary OFF) 10A 16A 250V, 10A 277V 	8652 ON - OFF (momentary OFF) 10(4)A 6A 277V
	ON - OFF Lit N/A	8653 ON - OFF Lit 10(4)A 6A 277V
	8610 \blacklozenge ON - ON 6(1)A 10A 277V 	8660 \blacklozenge ON - ON 6(1)A 10A 277V, 1/2HP 277V 1/2HP 250V, 1/4HP 277V
	8611 ON - OFF (momentary 1 side) 6A 277V 	8661 ON - OFF (momentary 1 side) 6A 277V
	8620 μ ON - OFF - ON See page 14 	8670 μ ON - OFF - ON See page 14
Y 6.0 Right angle PCB 1.3 x 0.8 Contact the factory for details	8630 Indicator 	D Paddle lever (Single pole non-lit only) F Flat Indicator only (Single pole)

NEW


*Switches with "X" terminals are supplied without terminal barriers



H8600VB ---
T8600VB ---



H8600VB ---
T8600VB ---



H8630FB ---
T8630FB ---



H8650VB ---
T8650VB ---




H8660VB ---
T8660VB ---



H8653VB ---
T8653VB ---


BODY

Panel cut-outs Flange
Cut-outs must be punched in the direction of insertion

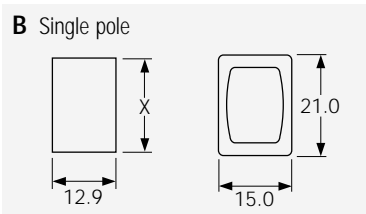

Single Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

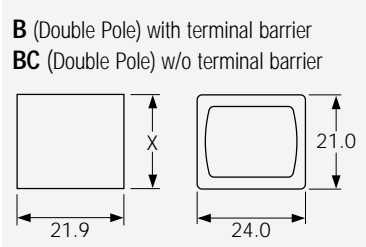

Double Pole dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

OPTIONS

Finish
Matt finish only

Colour
Call factory for custom colours
A full range is available for large orders

Legend printing
Select from the examples or call the factory for custom legends

Lamp voltage
Call factory for details of other available voltages

Blanking plate A8634FB
Dummy unit to fill unused panel holes
Single pole size only


Protective covers
L167 for SP
L180 for DP
(designed to IP65)
Snap on to bodies with V rocker or F lens but reduce panel thickness by 0.8mm.
Not for use with momentary types



Single Pole options
Most switches shown can have single pole switching in double pole bodies


DIMENSIONS (mm)

Single pole



Terminals shown are "H" 4.8 push on type

Double pole



Terminal spacing 10.2 between pole centres

For 8620 and 8670 see page 14

Examples of printing



CL076

CL080

CL141

CL142

CL059

CL058