
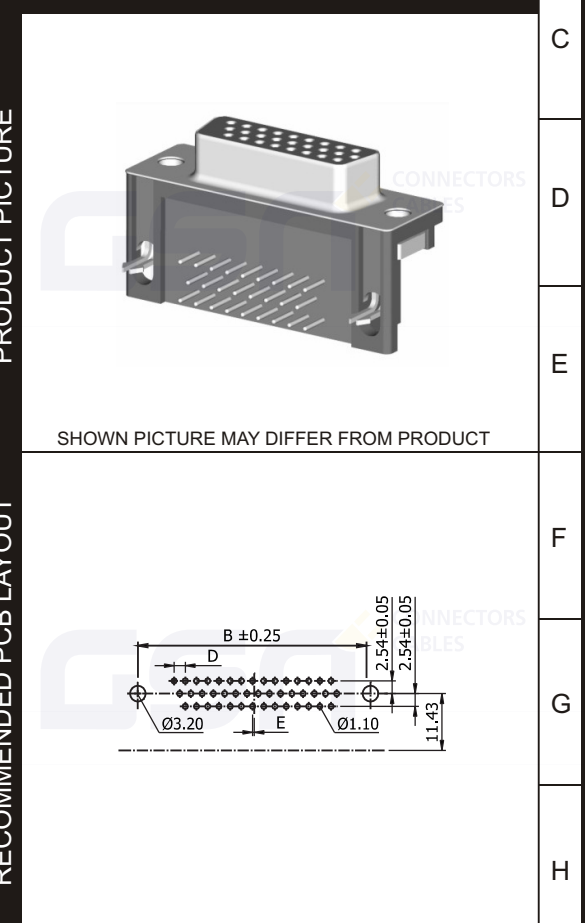


	1	2	3	4	5	6	7	8
A TECHNICAL DATA	01	CONTACT MATERIAL	BRASS		13	DIMENSIONS FOR POLE NO. 44	A=38.38, B=47.04, C=53.04, D=2.29, E=0.51	
	02	INSULATOR MATERIAL	PBT		14	DIMENSIONS FOR POLE NO. 62	A=55.84, B=63.50, C=69.32, D=2.41, E=0.58	
	03	FLAMMABILITY	UL 94V-0		15	MOUNTING PART FOR PCB	E: 2-PRONG BOARDLOCK W/ THREAD RIVET UNC 4#40	
	04	SHELL	STEEL, TIN PLATED		16	MOUNTING PART FOR COUNTERPART	A: UNC 4#40 THREAD	
	05	VOLTAGE RATING	250V AC/DC		17	PLATING	SELECTIVE FLASH GOLD	
	06	CURRENT RATING	3.0A AC/DC		18	PACKING	TRAY	
	07	INSULATION RESISTANCE	5000 MEG OHM MIN		19	POLE AMOUNT	44	
	08	CONTACT RESISTANCE	30 MILLI OHM MAX		20	WEBCODE	1493	
	09	OPERATING TEMPERATURE	-40°C TO +85°C		21			
	10	SUGGESTED SOLDERING CURVE	PLEASE CONTACT US		22			
	11	DIMENSIONS FOR POLE NO. 15	A=16.33, B=24.99, C=30.81, D=2.29, E=0.25		23			
	12	DIMENSIONS FOR POLE NO. 26	A=24.66, B=33.32, C=39.14, D=2.29, E=0.51		24			
B TECHNICAL DATA								

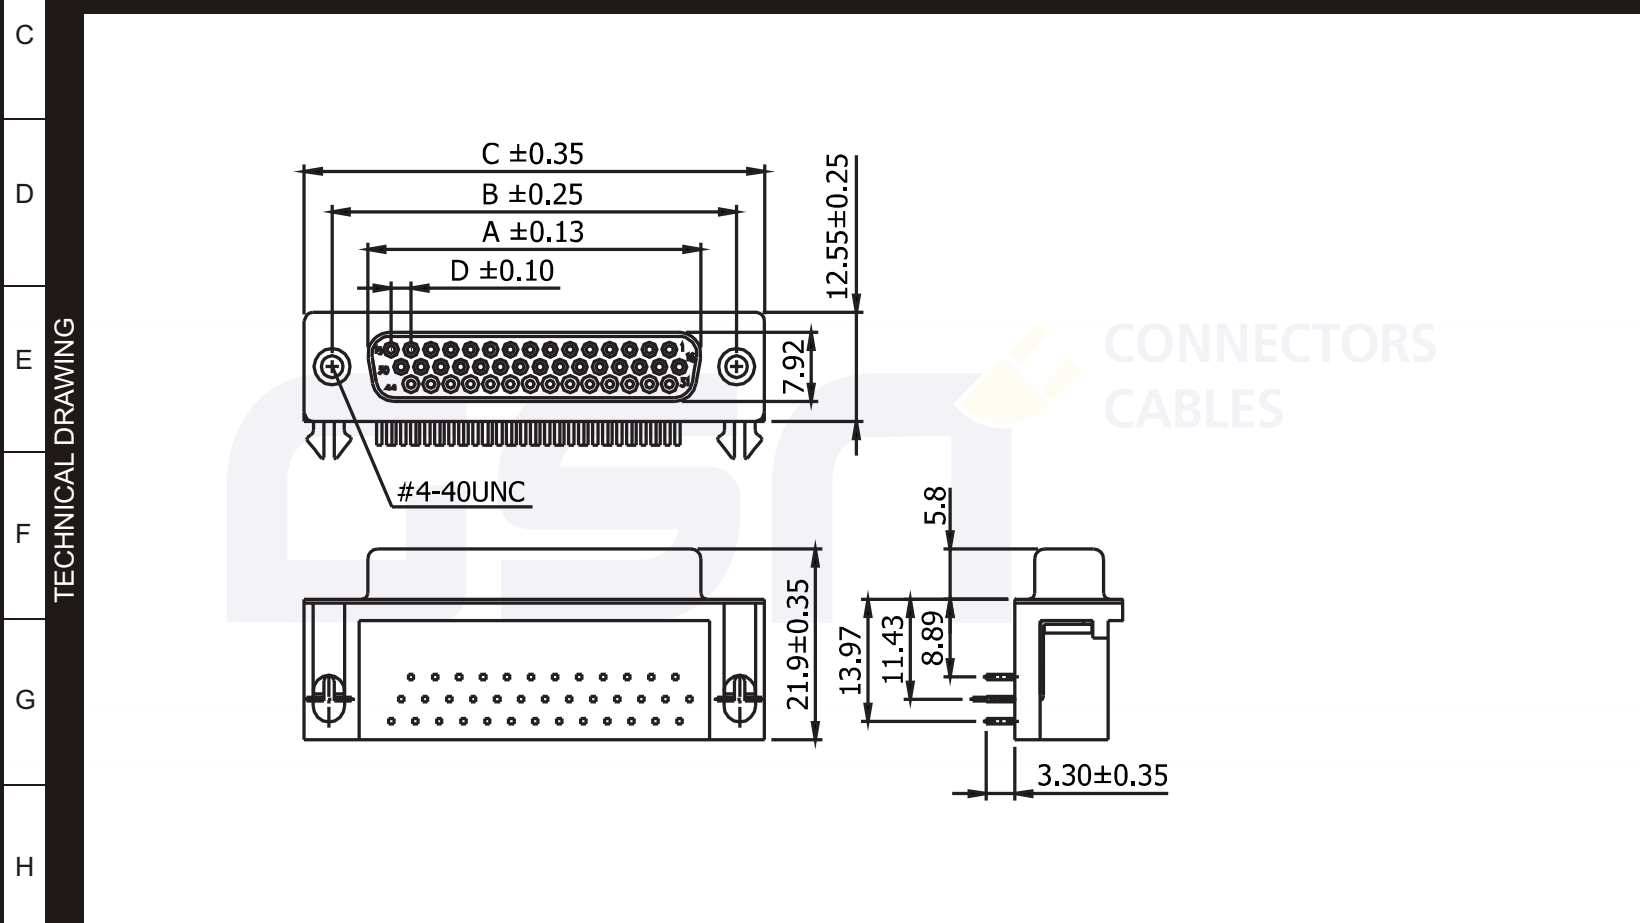

1	2	3	4	5	6	7	8
REVISION:		TOPIC:	DATE:	NAME:	UNIT:	PART. NO.:	DESCRIPTION:
01	FIRST RELEASE		23. Oct 2006	芮天娜	MM	50-HLN-F44EA-60	D-SUB, THT HORIZONTAL, 90°, 44 POLES, FEMALE
02	CD CHANGE		20. Mar 2009	芮天娜	TOLERANCES (UNLESS OTHERWISE SPECIFIED):		
03					$x \pm 0.30MM$ $x.x \pm 0.25MM$ $x.xx \pm 0.15MM$		
04					NO. OF PAGES:	COMPLIANT WITH:	
05					1/1	ROHS	
GSN ELECTRONICS PTE. LTD ©						HTTP://WWW.GSN.CN.COM	