

Kingbright®

T-1 3/4 (5mm) SOLID STATE LAMPS

L-53H BRIGHT RED
L-53I HIGH EFFICIENCY RED
L-53N PURE ORANGE
L-53PG PURE GREEN
L-53SRSG SUPER BRIGHT RED/ SUPER BRIGHT GREEN

L-53E ORANGE
L-53G GREEN
L-53Y YELLOW

Features

- LOW POWER CONSUMPTION.
- HIGH INTENSITY.
- VERSATILE MOUNTING ON P.C. BOARD OR PANEL.
- LOW CURRENT REQUIREMENTS.
- POPULAR T-1 3/4 DIAMETER, 1" LEAD LENGTH.
- RELIABLE AND RUGGED.
- SUPER BRIGHT RED AND SUPER GREEN BI-COLOR VERSION IS AVAILABLE.
- AVAILABLE ON TAPE AND REEL.
- DIFFUSED, TRANSPARENT AND WATER CLEAR TYPE.

Description

The Bright Red source color devices are made with Gallium Phosphide Red Light Emitting Diode.

The Green and Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The High Efficiency Red and Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.


The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

The Pure Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Pure Orange Light Emitting Diode.

The Pure Green source color devices are made with Gallium Phosphide Pure Green Light Emitting Diode.

Package Dimensions

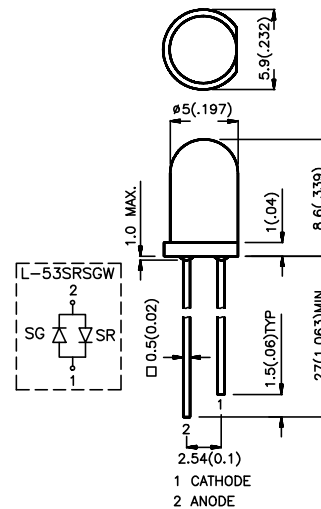

- Notes:
1. All dimensions are in millimeters (inches).
 2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
 3. Lead spacing is measured where the lead emerge package.
 4. Specifications are subjected to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 10 mA		Viewing Angle 2 θ /2
			Min.	Max.	
L-53HD	BRIGHT RED (GaP)	RED DIFFUSED	2	5	60°
L-53ID	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	12.5	80	60°
L-53IT		RED TRANSPARENT	50	200	30°
L-53EC		WATER CLEAR	50	200	30°
L-53ED	ORANGE (GaAsP/GaP)	ORANGE DIFFUSED	12.5	80	60°
L-53GD	GREEN (GaP)	GREEN DIFFUSED	5	32	60°
L-53GT		GREEN TRANSPARENT	20	150	30°
L-53GC		WATER CLEAR	20	150	30°
L-53YD	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	5	32	60°
L-53YT		YELLOW TRANSPARENT	20	80	30°
L-53YC		WATER CLEAR	20	80	30°
L-53ND	PURE ORANGE (GaAsP/GaP)	ORANGE DIFFUSED	12.5	80	60°
L-53NT		ORANGE TRANSPARENT	50	200	30°
L-53NC		WATER CLEAR	50	200	30°
L-53PGD	PURE GREEN (GaP)	GREEN DIFFUSED	2	8	60°
L-53PGT		GREEN TRANSPARENT	5	32	30°
L-53PGC		WATER CLEAR	5	32	30°
L-53SRSGW	SUPER BRIGHT RED (GaAlAs)	WHITE DIFFUSED	*80	*200	50°
	SUPER BRIGHT GREEN (GaP)		*12.5	*40	

- Notes:
1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
 2. * Luminous intensity with asterisk is measured at 20mA.


Electrical / Optical Characteristics at T_A=25° C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	Bright Red High Efficiency Red Orange Green Yellow Super Bright Red Super Bright Green Pure Orange Pure Green	700 625 625 565 590 660 565 610 555		nm	IF=20mA
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	Bright Red High Efficiency Red Orange Green Super Bright Red Super Bright Green Pure Orange Pure Green	45 45 45 30 35 20 30 35 30		nm	IF=20mA
C	Capacitance	Bright Red High Efficiency Red Orange Green Yellow Super Bright Red Super Bright Green Pure Orange Pure Green	40 12 12 45 10 95 45 15 45		pF	VF=0V;f=1MHz
V _F	Forward Voltage	Bright Red High Efficiency Red Orange Green Yellow Super Bright Red Super Bright Green Pure Orange Pure Green	2.0 2.0 2.0 2.2 2.1 1.85 2.2 2.0 2.25	2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.6 2.6	V	IF=20mA
I _R	Reverse Current	All	10		uA	VR = 5V


Absolute Maximum Ratings at T_A=25° C

Parameter	Bright Red	High Efficiency Red	Orange	Green	Yellow	Super Bright Red	Super Bright Green	Pure Orange	Pure Green	Units
Power dissipation	120	105	105	105	105	100	105	100	105	mW
DC Forward Current	25	30	30	25	30	30	25	30	25	mA
Peak Forward Current [1]	150	150	150	150	150	150	150	150	150	mA
Reverse Voltage	5	5	5	5	5	5	5	5	5	V
Operation/Storage Temperature	-40 ° C to +85 ° C									
Lead Solder Temperature [2]	260 ° C For 5 Seconds									


Notes:
 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 4mm below package base.

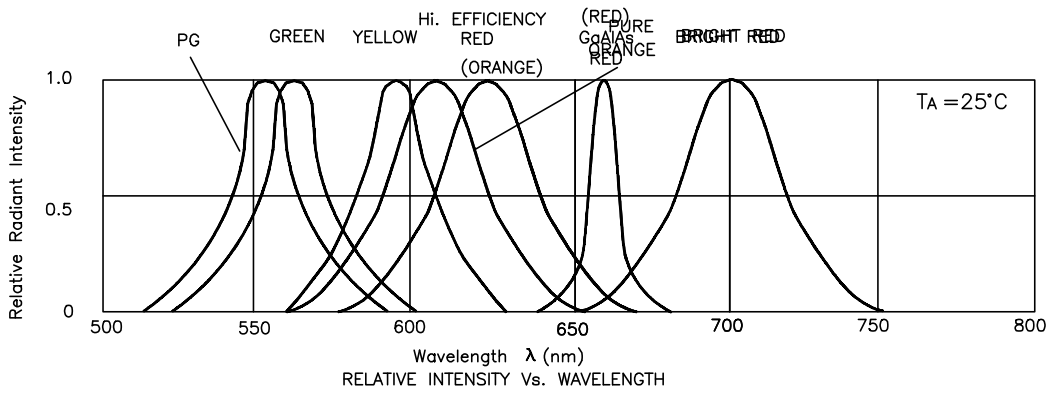


Bright Red L-53HD




FORWARD CURRENT Vs. FORWARD VOLTAGE

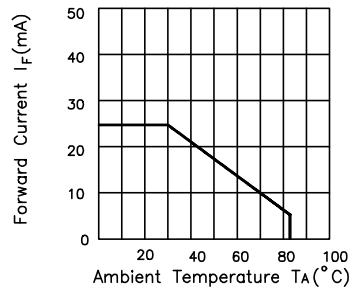

FORWARD CURRENT DERATING CURVE

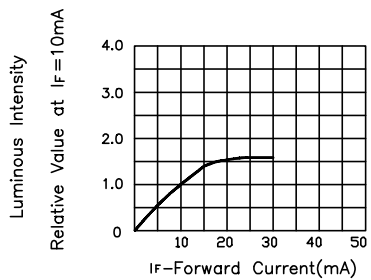


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


High Efficiency Red L-53ID,L-53IT,L-53EC
Orange L-53ED




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

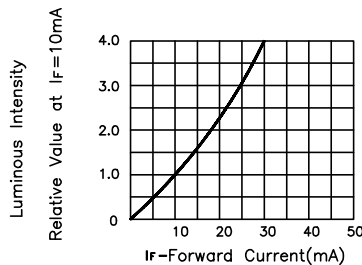


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Green L-53GD,L-53GT,L-53GC




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

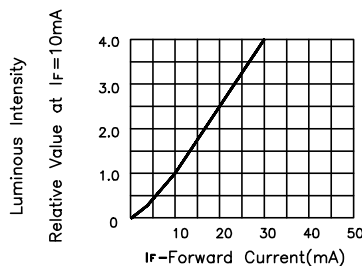


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Yellow L-53YD,L-53YT,L-53YC




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

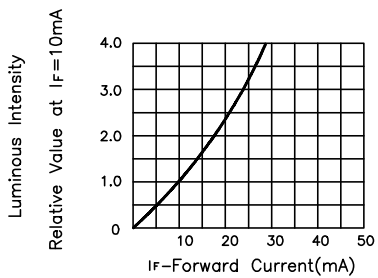


LUMINOUS INTENSITY Vs. FORWARD CURRENT

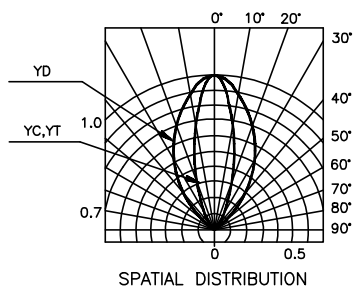


SPATIAL DISTRIBUTION


Pure Orange L-53ND,L-53NT,L-53NC




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

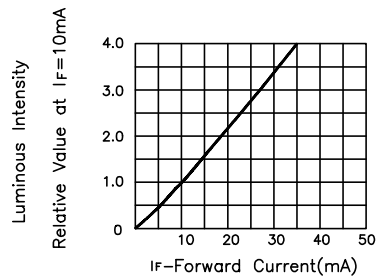


LUMINOUS INTENSITY Vs. FORWARD CURRENT

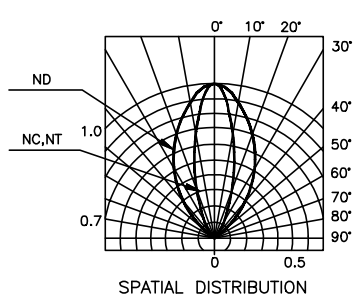


SPATIAL DISTRIBUTION


Pure Green L-53PGD,L-53PGT,L-53PGC




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

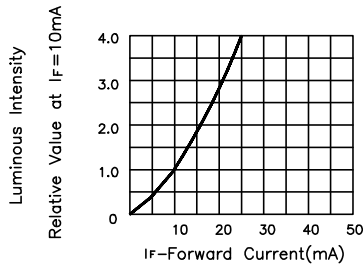


LUMINOUS INTENSITY Vs. FORWARD CURRENT




SPATIAL DISTRIBUTION


Super Bright Red / Super Bright Green L-53SRSGW




FORWARD CURRENT Vs. FORWARD VOLTAGE



FORWARD CURRENT DERATING CURVE

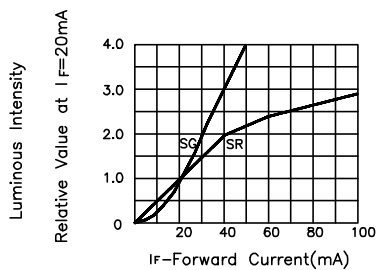

LUMINOUS INTENSITY Vs. FORWARD CURRENT



SPATIAL DISTRIBUTION