

Kingbright®

T-1 (3mm) LOW CURRENT LED LAMPS

L-934LI HIGH EFFICIENCY RED

L-934LY YELLOW

L-934LG GREEN

L-934LSR SUPER BRIGHT RED

Features

- MINIMUM LUMINOUS INTENSITY SPECIFIED AT 2 mA.
- HIGH LIGHT OUTPUT AT LOW CURRENTS.
- LOW POWER CONSUMPTION.
- LOW CURRENT REQUIREMENTS.
- WIDE VIEWING ANGLE.
- I.C. COMPATIBLE.
- RELIABLE AND RUGGED.

Description


The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

Package Dimensions

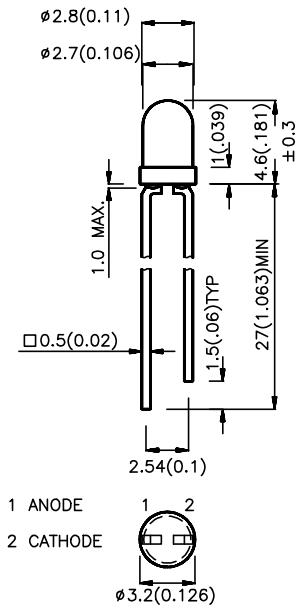

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subjected to change without notice.

Selection Guide

| Part No. | Dice | Lens Type | Iv (mcd) @ 2 mA | | Viewing Angle |
|-----------|---------------------------------|-----------------|-----------------|------|-------------------------------|
| | | | Min. | Max. | 2θ/2 |
| L-934LID | HIGH EFFICIENCY RED (GaAsP/GaP) | RED DIFFUSED | 0.8 | 5 | 60° |
| L-934LGD | GREEN (GaP) | GREEN DIFFUSED | 0.8 | 3.2 | 60° |
| L-934LYD | YELLOW (GaAsP/GaP) | YELLOW DIFFUSED | 0.8 | 3.2 | 60° |
| L-934LSRD | SUPER BRIGHT RED (GaAlAs) | RED DIFFUSED | 8 | 20 | 60° |

Note:

1. $\theta 1/2$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Electrical / Optical Characteristics at T_A=25°C

| Symbol | Parameter | Device | Typ. | Max. | Units | Test Conditions |
|-------------------------|-------------------------|--|---------------------------|---------------------------|-------|-----------------|
| λ_{peak} | Peak Wavelength | High Efficiency Red Green Yellow Super Bright Red | 625 565 590 660 | | nm | IF=2mA |
| $\Delta\lambda_{1/2}$ | Spectral Line Halfwidth | High Efficiency Red Green Yellow Super Bright Red | 45 30 35 20 | | nm | IF=2mA |
| C | Capacitance | High Efficiency Red Green Yellow Super Bright Red | 12 45 10 95 | | pF | VF=0V;f=1MHz |
| V _F | Forward Voltage | High Efficiency Red Green Yellow Super Bright Red | 1.7 1.9 1.8 1.65 | 2.0 2.2 2.1 1.95 | V | IF=2mA |
| I _R | Reverse Current | All | 10 | | uA | VR = 5V |


Absolute Maximum Ratings at T_A=25°C

| Parameter | High Efficiency Red | Green | Yellow | Super Bright Red | Units |
|--------------------------------|----------------------|-------|--------|------------------|-------|
| Power dissipation | 105 | 105 | 105 | 100 | mW |
| DC Forward Current | 30 | 25 | 30 | 30 | mA |
| Peak Forward Current [1] | 150 | 150 | 150 | 150 | mA |
| Reverse Voltage | 5 | 5 | 5 | 5 | V |
| Operating/Storage Temperature | -40 °C To +85 °C | | | | |
| Lead Soldering Temperature [2] | 260 °C For 5 Seconds | | | | |


- Notes:
 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 4mm below package base.

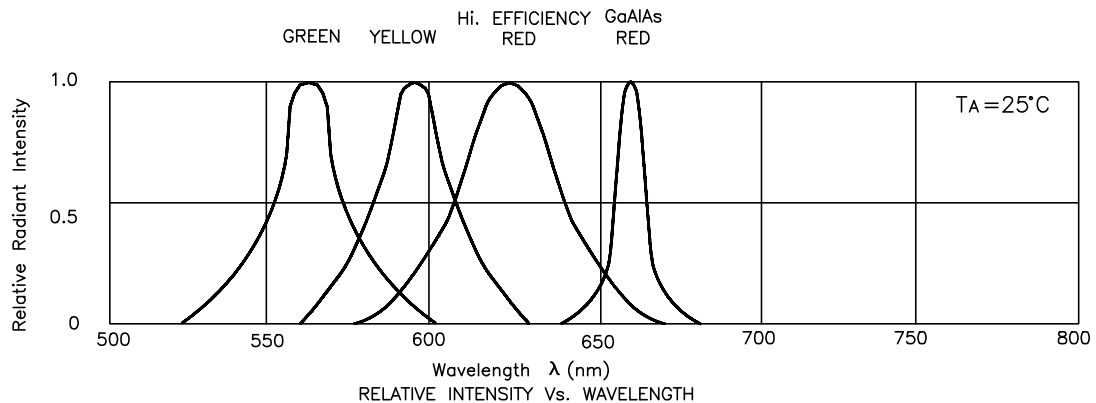


High Efficiency Red L-934LID

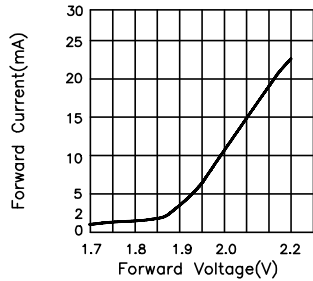


FORWARD CURRENT Vs. FORWARD VOLTAGE

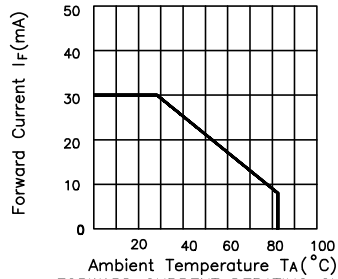

FORWARD CURRENT DERATING CURVE

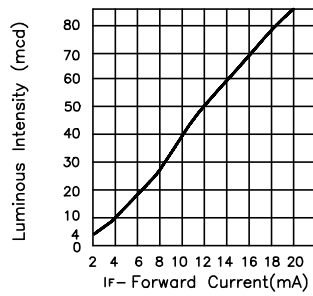


LUMINOUS INTENSITY Vs. FORWARD CURRENT

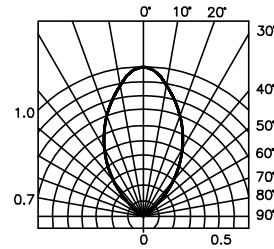


SPATIAL DISTRIBUTION


Green L-934LGD

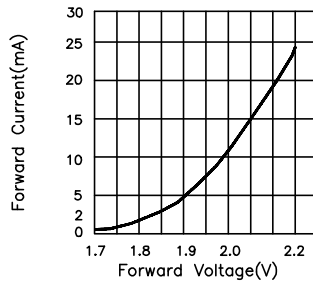


FORWARD CURRENT Vs. FORWARD VOLTAGE

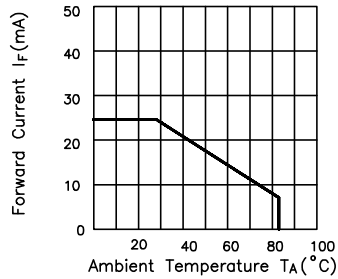

FORWARD CURRENT DERATING CURVE

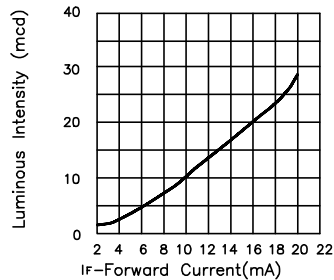


LUMINOUS INTENSITY Vs. FORWARD CURRENT

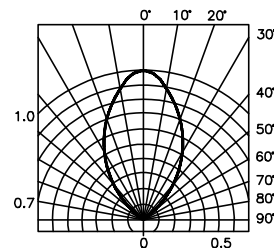


SPATIAL DISTRIBUTION


Yellow L-934LYD

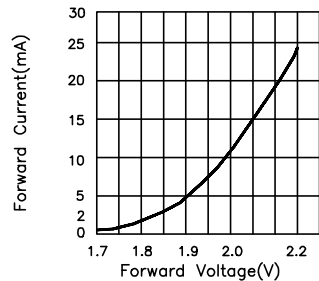


FORWARD CURRENT Vs. FORWARD VOLTAGE

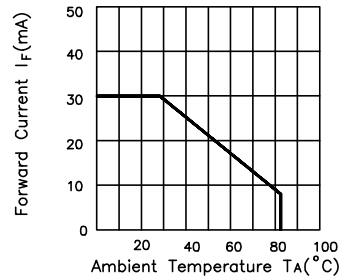

FORWARD CURRENT DERATING CURVE

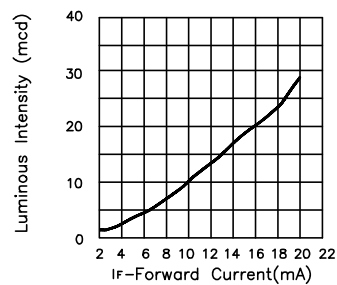


LUMINOUS INTENSITY Vs. FORWARD CURRENT

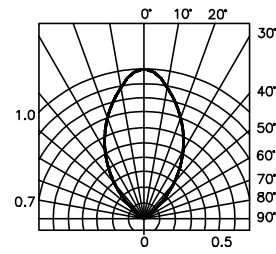


SPATIAL DISTRIBUTION


Super Bright Red L-934LSRD

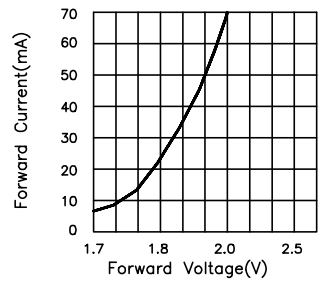


FORWARD CURRENT Vs. FORWARD VOLTAGE

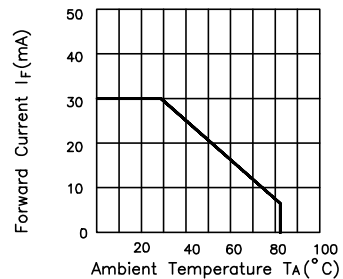

FORWARD CURRENT DERATING CURVE

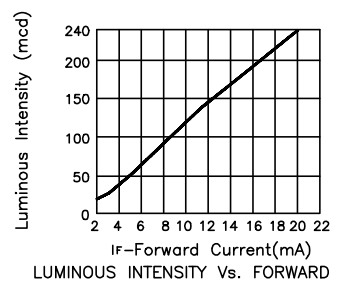

LUMINOUS INTENSITY Vs. FORWARD CURRENT

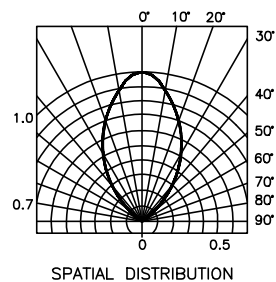

SPATIAL DISTRIBUTION