

SANYO

No.1053B

LA7018

Monolithic Linear IC

Electronic Switch
for Use in VTR Applications

Features

- Wide input dynamic range
- Low distortion
- Good frequency characteristic

Maximum Ratings/T_a=25°C


Maximum supply voltage	V _{CC} max	15	unit
Allowable power dissipation	P _d max	300	mW
Operating Temperature	T _{opg}	-20 to +65	°C
Storage temperature	T _{stg}	-40 to +125	°C

Operation Characteristics/T_a=25°C, V_{CC}=12V


		min	typ	max	unit	
Circuit current	I _D		9.3	12.5	mA	
Total harmonic distortion	THD	*R _g =600Ω, 4.5V _{p-p} , f=1kHz, R _L =∞	0.007	0.1	%	
Noise	e _n	*R _g =600Ω, f=20Hz to 20kHz, R _L =∞	-93	-80	dBs	
Crosstalk	I _{s1}	*Input A: R _g =50Ω, f=3.58MHz, 2V _{p-p} , Input B: R _g =1kΩ	46	60	dB	
Pedestal	ΔV _{ped}	V _g =2.2V to 3.0V	-100	0	+100	mV
Second harmonic		R _g =50Ω, f=1MHz, 4.0V _{p-p} , R _L =∞	46	55	dB	
Third harmonic		R _g =50Ω, f=1MHz, 4.0V _{p-p} , R _L =∞	46	52	dB	
Control, threshold voltage	V _{8s}		2.2	2.6	3.0	V
Pin voltage (pin 4)	V ₁		6.9			V
Pin voltage (pin 7)	V ₃	V ₃ =2.2V	7.6			V
Pin voltage (pin 7)	V ₃	V ₃ =3.0V	7.6			V
Pin voltage (pin 2)	V ₇	V ₃ =3.0V	7.6			V
Pin voltage (pin 2)	V ₇	V ₃ =2.2V	7.6			V
Pin current	I ₅		60	130	μA	

Note) *: Test for input 1 and input 2.
For input 1 test, V_{cont} (pin 8 voltage) is 2.0V.
For input 2 test, V_{cont} is 3.0V.

Equivalent Circuit Block Diagram

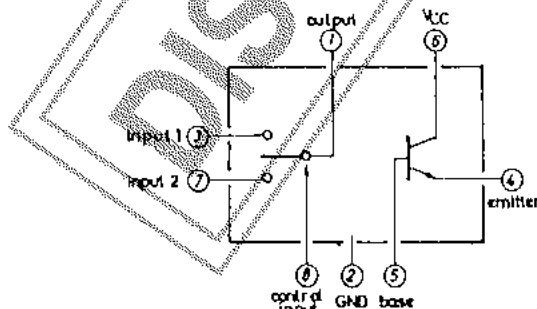

Case Outline 3001A-D8IC
(unit:mm)




SANYO: DIP8

Specifications and information herein are subject to change without notice.

SANYO Electric Co., Ltd. Semiconductor Overseas Marketing Div.
Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN

LA7018



Test Circuit






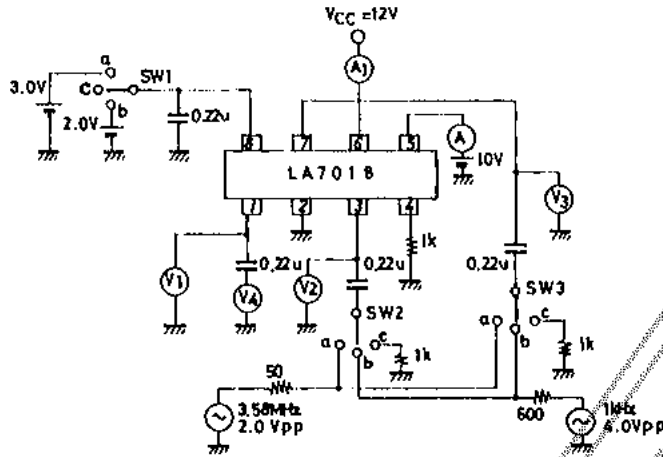


Test Conditions

Item	Symbol	SW mode			Test point
		SW1	SW2	SW3	
Circuit current	I_{ij}	c	c	c	A ₁
Distortion (1)	THD	b	b	c	V ₄
Distortion (2)	THD	a	c	b	V ₄
Noise (1)	e_n	b	c	c	V ₄
Noise (2)	e_n	a	c	c	V ₄
Crosstalk (1)	I_{B1}	b	c	a	V ₄
Crosstalk (2)	I_{B2}	a	c	c	V ₄
Pedestal	ΔV_{PED}	a-b	c	c	V ₁
Pin voltage (pin 1)		b	c	c	V ₁
Pin voltage (pin 3)		b	c	c	V ₂
Pin voltage (pin 3)		a	c	c	V ₂
Pin voltage (pin 7)		a	c	c	V ₃
Pin voltage (pin 7)		b	c	c	V ₃

Main Characteristics

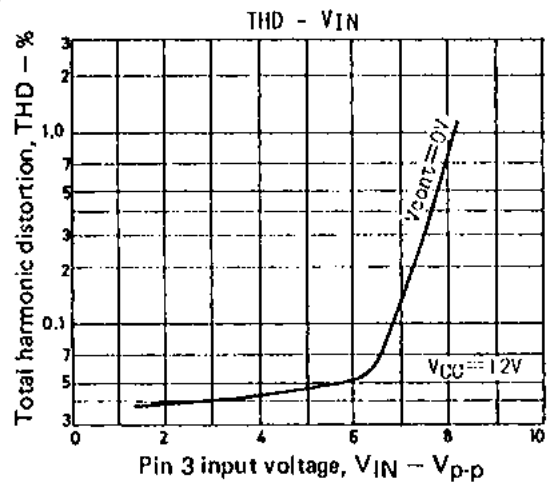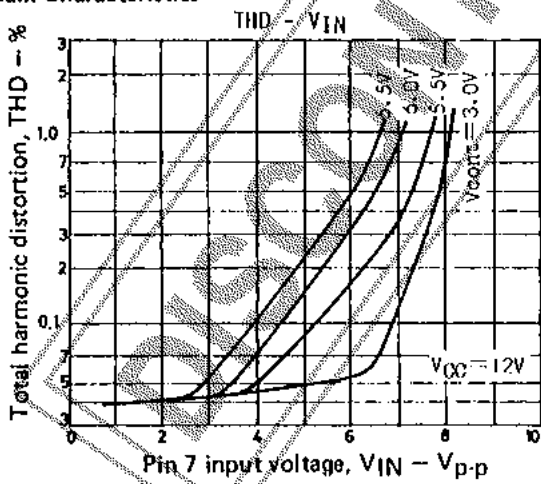

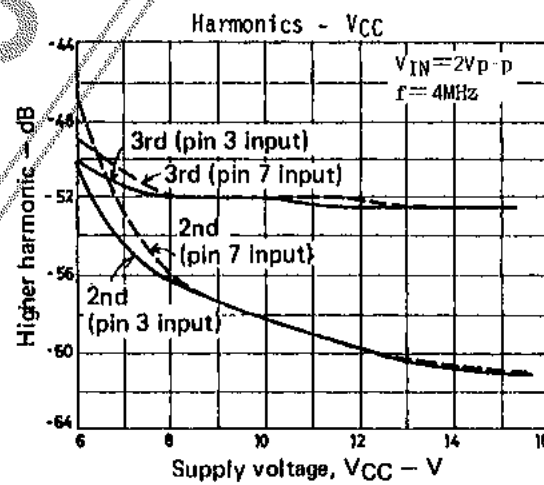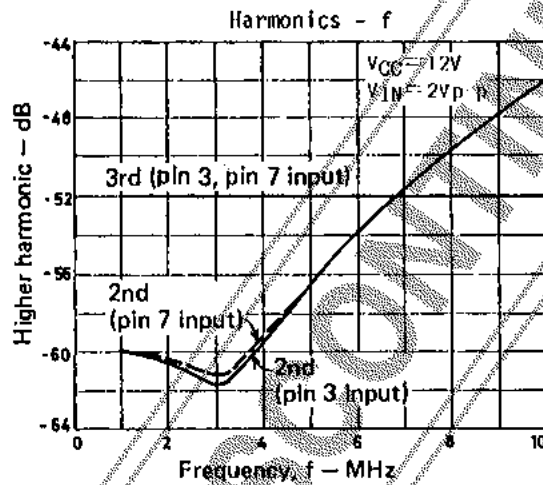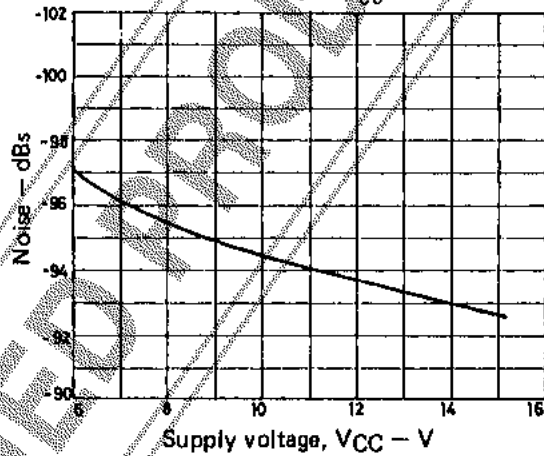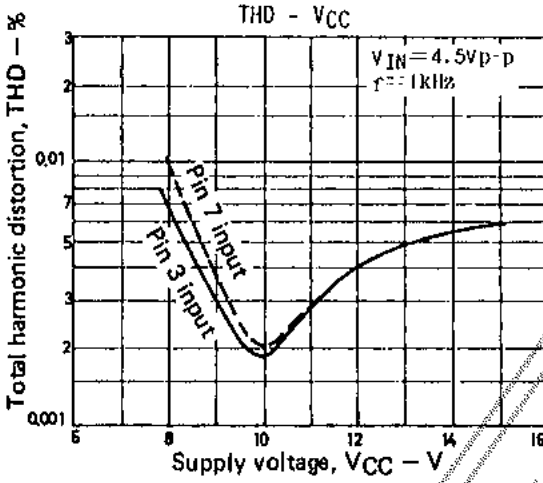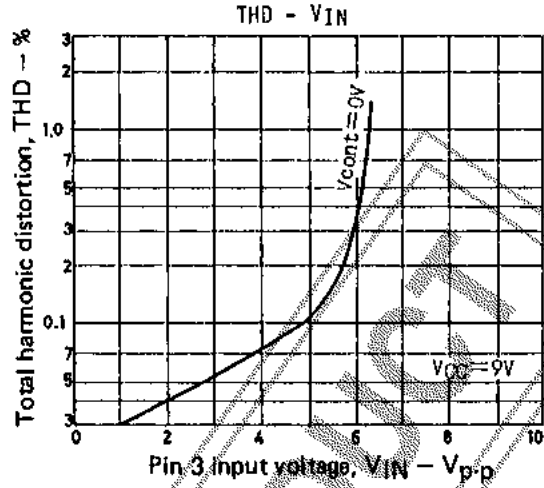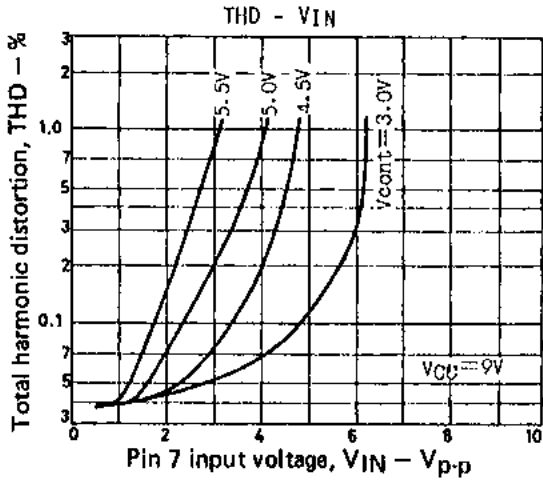

Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.