

## FEATURES

- 30A switching use relay at ambient temperature of 85°
- Solder lug (quick connect) and PCB terminals are available for customer's selection.
- Contact form: 1 form C, 1 Form B, 1 Form A, and 2 Form A
- Using at automotives, direct connection with cell motors, transmission, and anti-locking braking system.



## ORDERING INFORMATION

LD      —      12      F

1      2      3      4      5      6

- |  |   |   |
|--|---|---|
| <p>1. Type</p> <p>2. Contact Arrangement</p> <p>Nil : 1 Form C</p> <p>1A : 1 Form A</p> <p>1B : 1 Form B</p> <p>2A : 1PDM</p> <p>2AU</p> | <p>3. Coil Nominal Voltage</p> <p>4. Cover Type</p> <p>F : Cover for Steel Bracket</p> <p>P : Cover for Plastic Bracket</p> <p>B : Plastic Cover</p> <p>5. Terminal Type</p> <p>Nil : Standard Type</p> <p>P : PCB Terminal</p> | <p>6. Special Mark</p> <p>Nil : Standard Type.</p> <p>R : Coil parallel with 1/2W resistor 820Ω for 12VDC, 3200Ω for 24VDC.</p> <p>D1 : Coil parallel with diode 1N4007 the Positive pole "+" on # 85 terminal.</p> <p>D2 : Coil parallel with diode 1N4007 the Negative pole "-" on # 85 terminal.</p> |
|--|---|---|


## CONTACT RATING

1PDT	Resistive (Cos.θ = 1)	DC 14V	40A/30A
1PST-DM	Resistive (Cos.θ = 1)	DC 14V	2 x 20A

## COIL DATA(1.8W, at 25°C)

Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)	Nominal Current (mA)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
5	14	357	3.75	0.5
12	80	150	7.8	1.2
24	320	75	17.0	2.4

# DIMENSIONS(±0.1mm)

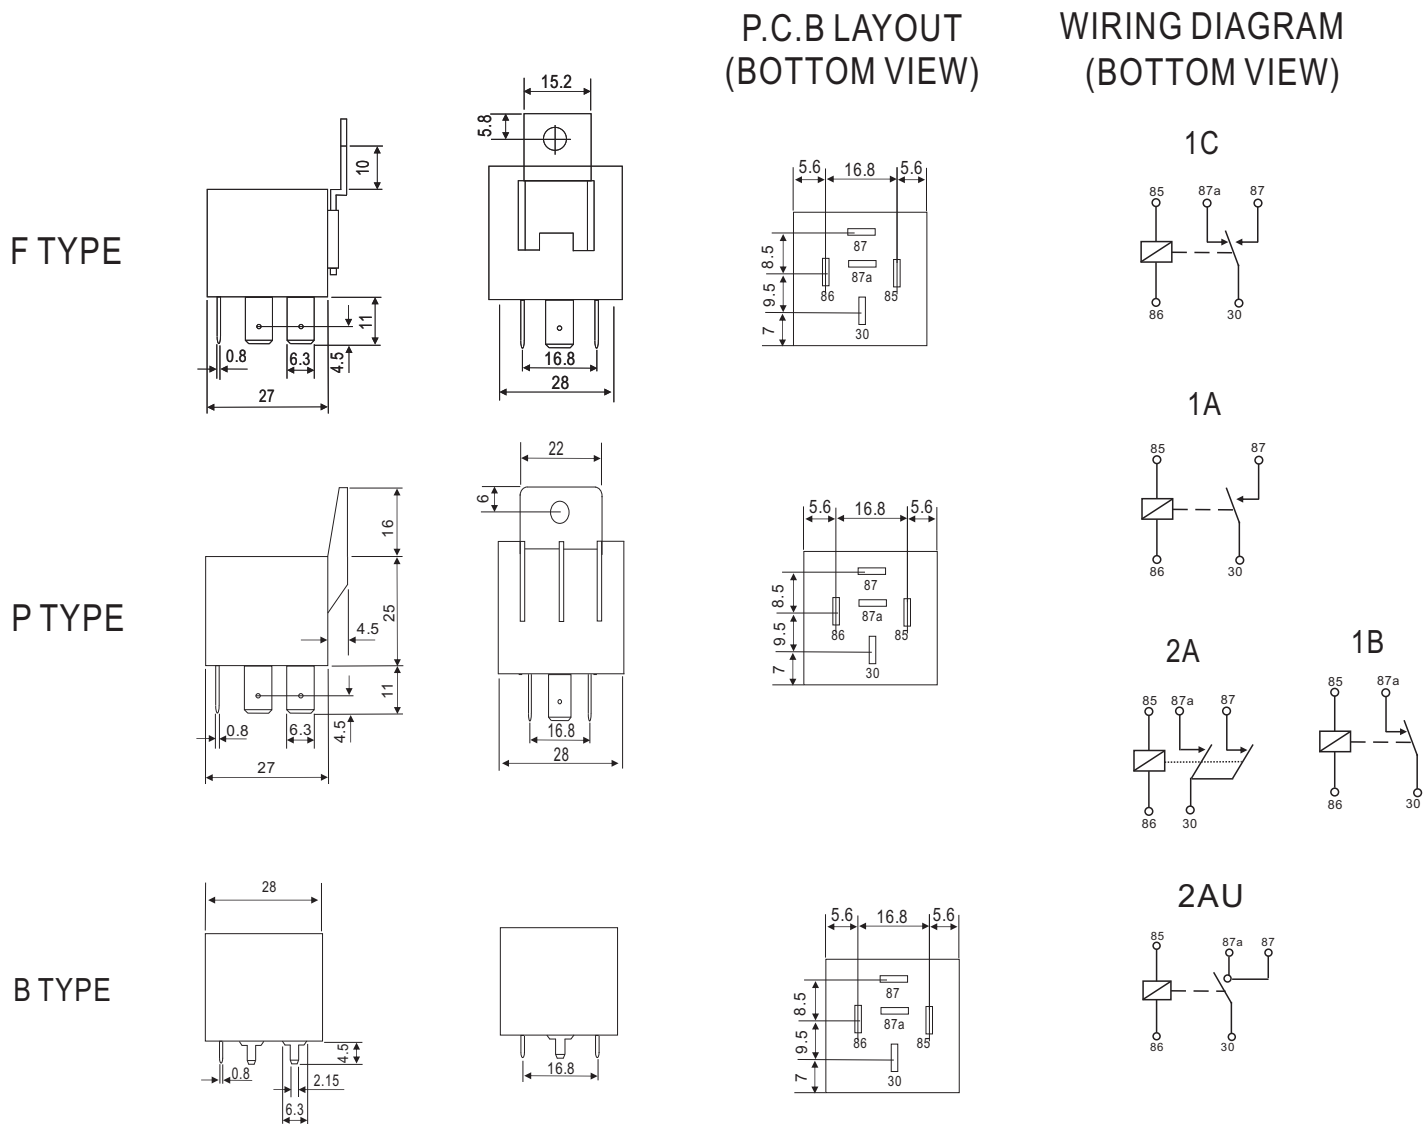

## GENERAL DATA

Insulation Resistance	50 MΩ Min. (DC 500V)
Dielectric Strength	500 VAC, 50/60Hz between contact.
	1,000 VAC, 50/60Hz between all elements.
Contact Material	Ag Alloy.
Contact Resistance	100 milliohms max. ( initial value )
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	10 ms max.
Release Time	10 ms max.
Temperature Range	- 40°C ~ + 85°C
Expected Life	With operation rate 30/min.
	Mechanical - 1,000,000 operations min. Electrical - 100,000 operations min. at rated load.
Weight	38 grams