



Arrangement of Contact

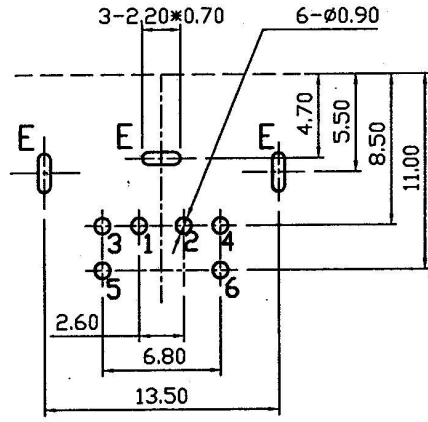

Pin Hole Layout  
(Jack Bottom View)



4.	Cover	PBT UL 94 V-0	1	Black Color
3.	Housing	PBT UL 94 V-0	1	Black Color
2.	Metal Shell	0.3T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Copper	6	Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel
NO.	Description	Material	Q' TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	08.15.2007	王一鳴	馬亞峰	劉文輝	

RoHS  
Compliant

PART NAME : MINI DIN JACK	PART NUMBER:	VERSION: 5.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED		SCALE: 1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲ : The Most Important Dimension