


NPN General Purpose Amplifier

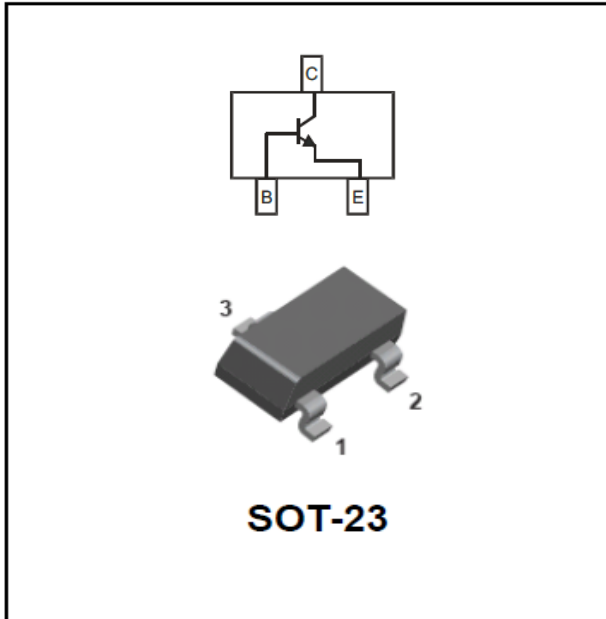

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- Marking: 1AM

■ Off Characteristics

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage	V_{CEO}	V	$I_C=1.0\text{mA}, I_B=0$	40
Collector-Base Voltage	V_{CBO}	V	$I_C=10\mu\text{A}, I_E=0$	60
Emitter-Base Voltage	V_{EBO}	V	$I_E=10\mu\text{A}, I_C=0$	6.0
Collector Current	I_C	mA		200
Collector-base Cut-off Current	I_{CBO}	nA	$V_{CB}=60\text{Vdc}$	50
Collector-emitter Cut-off Current	I_{CEX}	nA	$V_{CE}=30\text{Vdc}, V_{BE}=3\text{Vdc}$	50
Collector Power Dissipation	P_C	mW		350
Thermal Resistance Junction to Case	$R_{\theta JC}$	$^{\circ}\text{C/W}$		185
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	$^{\circ}\text{C/W}$		357
Operation Junction Temperature	T_J	$^{\circ}\text{C}$		-55 to +150
Storage Temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150

*Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2.0\%$



MMBT3904

■ On Characteristics

Item	Symbol	Unit	Conditions	Min	Max
DC Current Gain	h_{FE}		$I_C=0.1\text{mA}, V_{CE}=1.0\text{Vdc}$	40	
			$I_C=1.0\text{mA}, V_{CE}=1.0\text{Vdc}$	70	
			$I_C=10\text{mA}, V_{CE}=1.0\text{Vdc}$	100	300
			$I_C=50\text{mA}, V_{CE}=1.0\text{Vdc}$	60	
			$I_C=100\text{mA}, V_{CE}=1.0\text{Vdc}$	30	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	Vdc	$I_C=10\text{mA}, I_B=1.0\text{mA}$		0.2
			$I_C=50\text{mA}, I_B=5.0\text{mA}$		0.3
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	Vdc	$I_C=10\text{mA}, I_B=1.0\text{mA}$	0.65	0.85
			$I_C=50\text{mA}, I_B=5.0\text{mA}$		0.95

■ Small-signal Characteristics

Item	Symbol	Unit	Conditions	Min	Max
Collector-base Output Capacitance	C_{ob}	pF	$V_{CB}=5.0\text{Vdc}, f=1.0\text{MHz}, I_E=0$		4
Emitter-base Input Capacitance	C_{ib}	pF	$V_{EB}=0.5\text{Vdc}, f=1.0\text{MHz}, I_C=0$		8
Transition frequency	f_T	MHz	$I_C=10\text{mA}, V_{CE}=20\text{Vdc}, f=100\text{MHz}$	300	
Noise Figure	NF	dB	$V_{CE}=5.0\text{V}, f=10\text{Hz to } 15.7\text{kHz}, I_C=100\mu\text{A}, R_S=1.0\text{k}\Omega$		5

■ Switching Characteristics

Item	Symbol	Unit	Conditions	Value
Delay Time	t_d	ns	$V_{CC}=3.0\text{Vdc}, V_{BE}=0.5\text{Vdc}, I_C=10\text{mA}, I_{B1}=1.0\text{mA}$	35
Rise Time	t_r	ns		35
Storage Time	t_s	ns	$V_{CC}=3.0\text{Vdc}, I_C=10\text{mA}, I_{B1}=I_{B2}=1.0\text{mA}$	200
Fall Time	t_f	ns		50

■ Ordering Information (Example)


PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBT3904	F2	Approximate 0.008	3000	30000	120000	7" reel




MMBT3904

■ Characteristics(Typical)


Static Characteristic

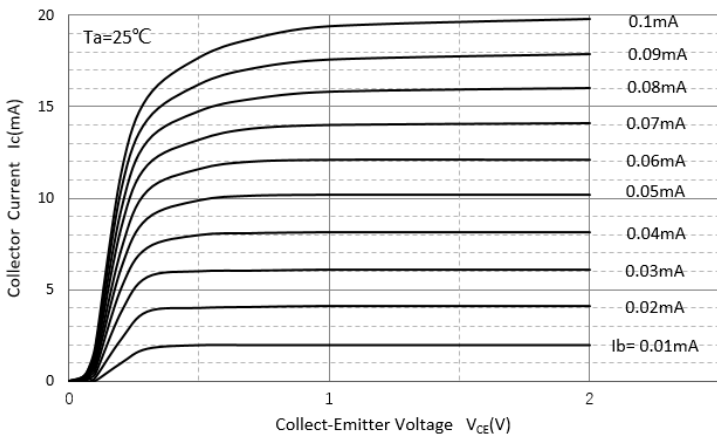


DC Current Gain

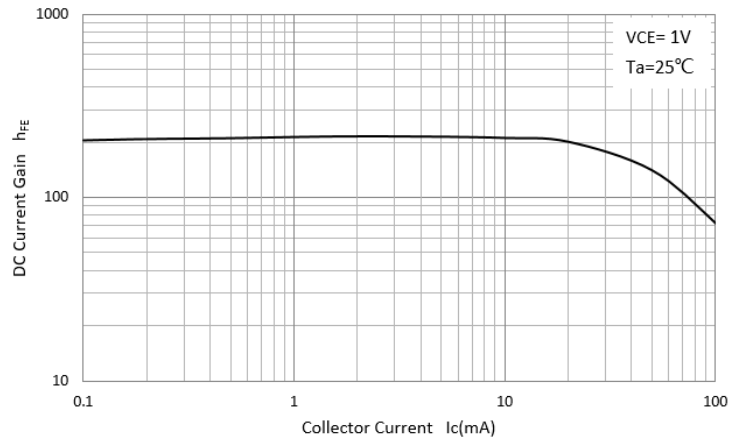


Collector-Emmitter Saturation Voltage

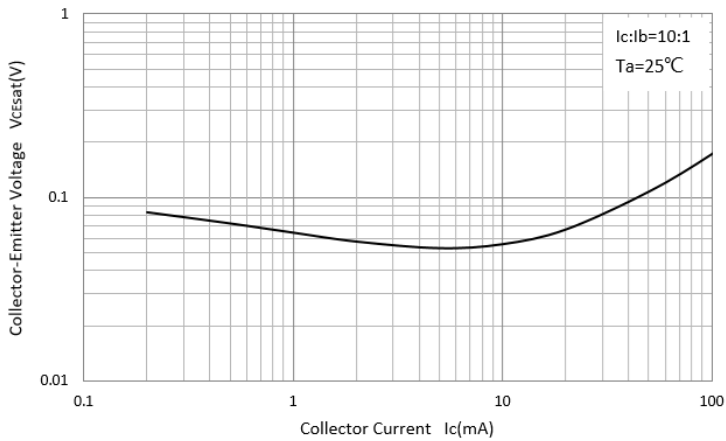


Base-Emmitter Saturation Voltage

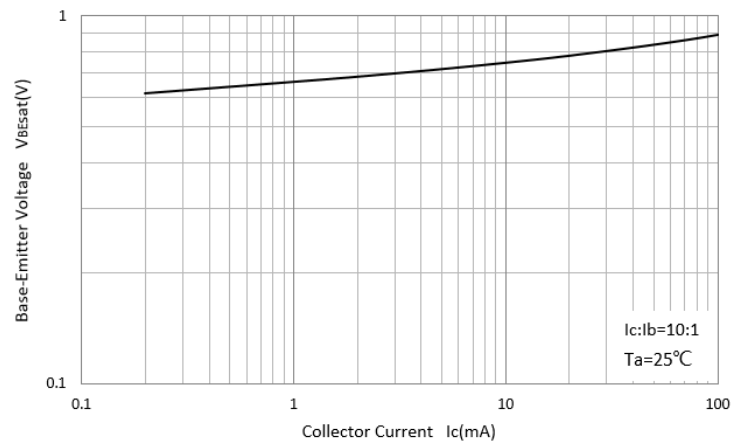

Base-Emmitter On Voltage

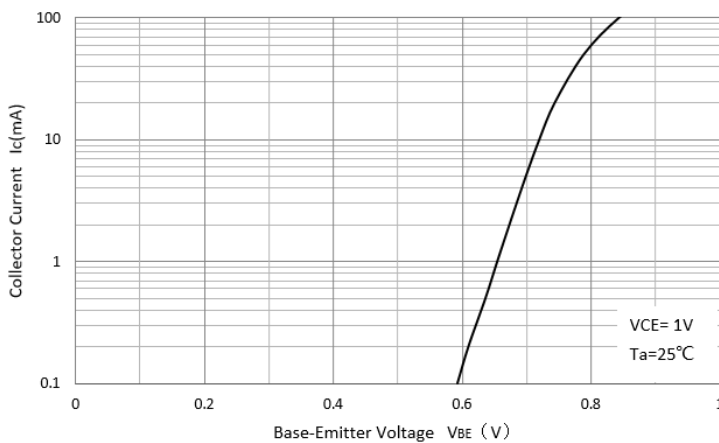



$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

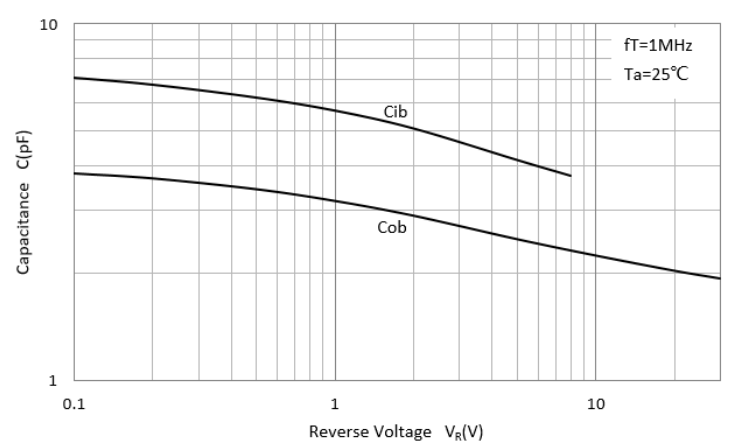




MMBT3904

■SOT-23 Package Outline Dimensions

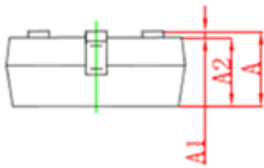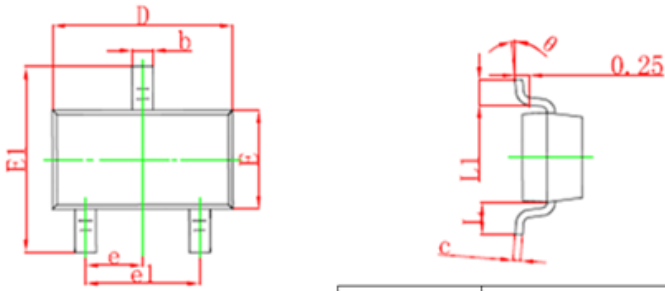


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°		8°	

■SOT-23 Soldering Footprint

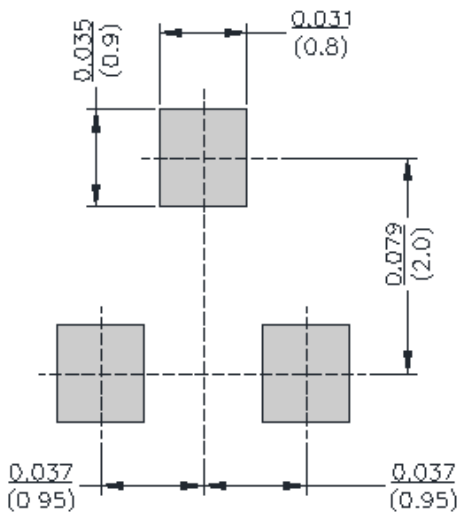



■ Marking Information



1AM = Product Type Marking Code
Y = Date Code Marking

Date code Key (2 years a cycle)

Year	2011											
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	J	O	L	C	K	B	P	D	M	E	G	F

Year	2012											
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	W	N	Y	T	R	H	A	I	U	X	Z	S



MMBT3904

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.