







Applications	Commercial Grade	
Feature	No Directivity Wire Wound Wire Wound Ferrite Core	
Series Type	NLCV25-PF	
Status	Production (Not Recommended for New Design) Recommended Alternate Part No. : NLCV25T-100K-EF (Interchangeability is not guaranteed.)	
Brand	TDK	



	Size	
Length(L)	2.50mm ±0.20mm	
Width(W)	2.00mm ±0.10mm	
Thickness Height	1.80mm ±0.10mm	
Recommended Land Pattern (A)	1.00mm Nom.	
Recommended Land Pattern (B)	1.50mm Nom.	
Recommended Land Pattern (C)	1.50mm Nom.	

Electrical Characteristics		
Inductance	$10\mu H$ $\pm 10\%$ at $2.52MHz$	
Rated Current	210mA	
DC Resistance [Typ.]	1.69Ω	
DC Resistance [Max.]	2.197Ω	
Self Resonant Frequency [Min.]	32MHz	
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]	30	

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
	Wave (Flow)		
Soldering Method	Reflow		
	Iron Soldering		
AEC-Q200	No		
Packing	Blister (Plastic)Taping [180mm Reel]		
Package Quantity	2000pcs		
Weight	0.025g		


[!] Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.











Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

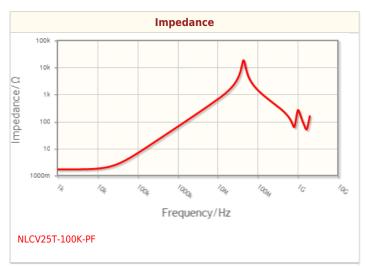


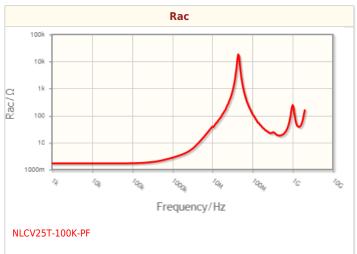

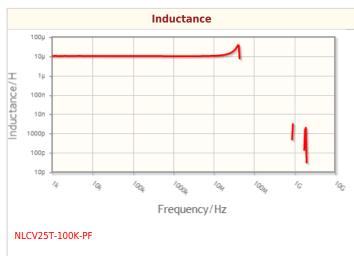

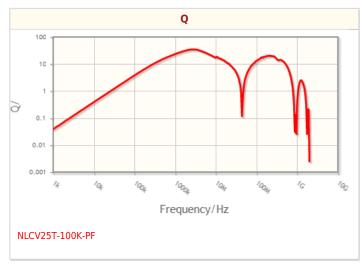

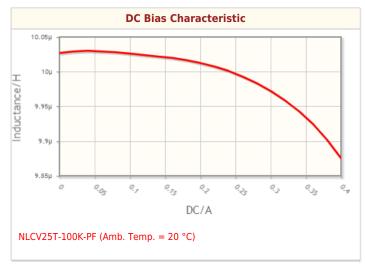

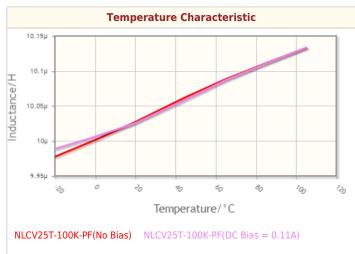

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.


[!] All specifications are subject to change without notice.







Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

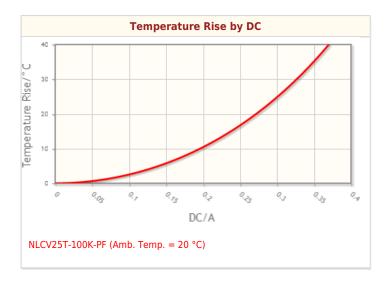

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.











Associated Images

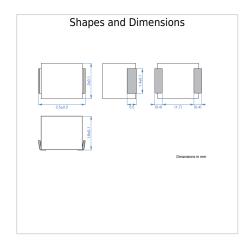



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.