

ROHS Compliant





台灣駿品端子股份有限公司

TAIWAN KING PIN TERMINAL CO.,LTD

台北縣樹林市俊德街 23 號

TEL:886-2-26895596.26886112 FAX:886-2-26886110  
E-mail:info@tkp.com.tw http://www.tkp.com.tw

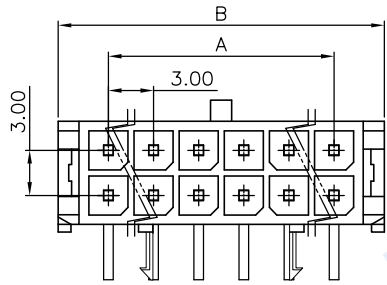

- NOTE :
- \* Material : Nylon UL 94V-0(Lead Free)
  - \* Color : Black
  - \* Finish : Plating Tin over Nickel or Gold Flash
  - \* Electrical rating : C-UL 250V 5A, AC/DC
  - \* Mates with H6630R1 receptacle housings
  - \* 2-24 circuits available
  - \* Dual row

A

B

C

D

E

F

A









B

C

D

E

F

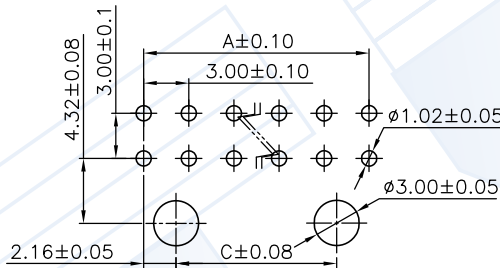

RECOMMENDED PCB LAYOUT THICKNESS: 0.62/1.57

PCB LAYOUT 6 CKT HEADER

PCB LAYOUT 4 CKT HEADER

PCB LAYOUT 2 CKT HEADER

CIRCUITS	PART NO.	DIM. A	DIM. B	DIM. C
2	P6630L-02(LF)	---	6.70	---
4	P6630L-04(LF)	3.00	9.70	---
6	P6630L-06(LF)	6.00	12.70	---
8	P6630L-08(LF)	9.00	15.70	4.70
10	P6630L-10(LF)	12.00	18.70	7.70
12	P6630L-12(LF)	15.00	21.70	10.70
14	P6630L-14(LF)	18.00	24.70	13.70
16	P6630L-16(LF)	21.00	27.70	16.70
18	P6630L-18(LF)	24.00	30.70	19.70
20	P6630L-20(LF)	27.00	33.70	22.70
22	P6630L-22(LF)	30.00	36.70	25.70
24	P6630L-24(LF)	33.00	39.70	28.70



PART NO.	P6630L-XX(LF)				Part NO.	Material	Color/Finish	Remark	APPROVAL
	TITLE	3.00mm Wire to Wire				P6630L-XX(LF)	UL 94V-0	Tin	
THIRD ANGLE	SCALE	UNIT	SHEET NO	TOLERANCE	P6630L-XXG	UL 94V-0	Gold Flash		CHECKED: 張明遠
	2:1	mm	1/1	.X± 0.30 .XXX±0.10 .XX± 0.20 ANGLE±2°			ODD NUMBERS	REV	APPROVED: 陳泓宇
	300-013		C300-004				ENG950802	A3	

1

2

3

4

5

6

7

8