

POWER WIREWOUND RESISTOR


PW-Fixed Type

PWA-Adjustable Type

PWN-Noninductive Type

FEATURES

- Resistance value unchange after long use, good resistivity to short time overload.
- Small in size, able to take large load, fit for use on heavy electric machines and production machines.
- Multi-terminal types and adjustable types available.

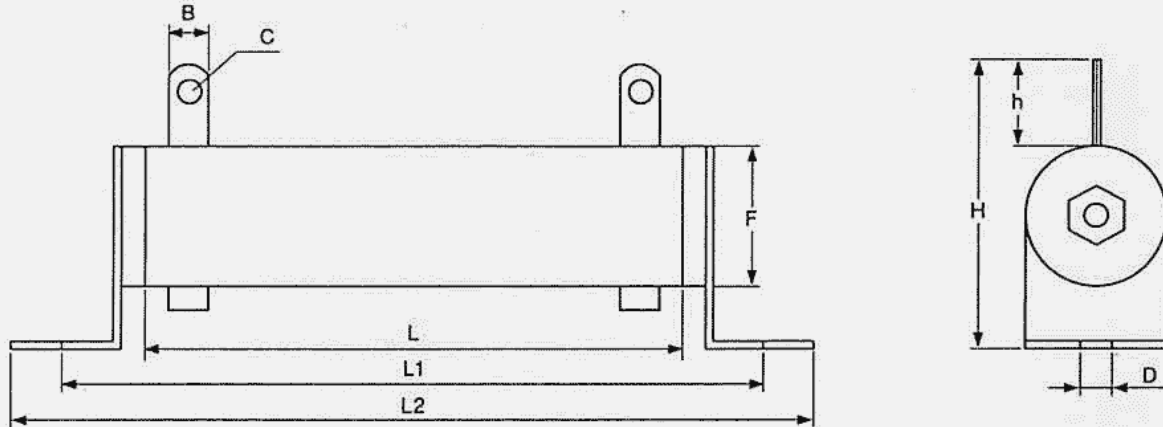

RATED WATTS	DIMENSIONS (mm)								
	L	F	B	L1	C ϕ	h	D	L2	H
10W	45	12	4		2	9	3		
20W	60	17	5	73	2.5	12	3	92	37
30W	80	17	5	93	2.5	12	3	112	37
40W	110	17	5	123	2.5	12	3	142	37
50W	110	25	8	140	4	18	5	164	58
60W	90	28	8	120	4	18	5	144	60
80W	110	28	8	140	4	18	5	164	60
100W	140	28	8	170	4	18	5	194	60
120W	160	28	8	190	4	18	5	214	60
150W	195	28	8	225	4	18	5	249	60
160W	185	35	8	220	4	18	9	254	75
200W	210	35	8	245	4	18	9	274	75
250W	210	40	10	250	5	22	9	277	77
300W	260	40	10	300	5	22	9	327	77
400W	330	40	10	370	5	22	9	400	77
500W	330	50	15	370	6	22	9	400	105
600W	400	50	15	440	6	22	9	470	105
800W	460	60	15	505	6	30	9	535	112
1000W	540	60	15	585	6	30	9	615	112
1300W	650	65	15	690	6	30	9	720	115