


## Extruded heatsinks for PCB mounting

- horizontal for semiconductor screw-mounting
- special lengths and transistor drillings on request

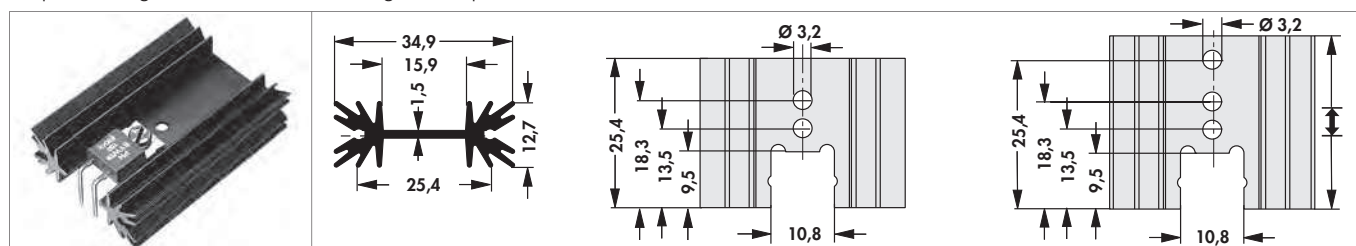

art. no.	l [mm]	R <sub>th</sub> [K/W]	Ø
<b>SK 104 25,4 LS</b>	25.4	14	SOT 32/ TO 220/ TO 3 P
<b>SK 104 38,1 LS</b>	38.1	11	SOT 32/ TO 220/ TO 3 P
<b>SK 104 50,8 LS</b>	50.8	9	SOT 32/ TO 220/ TO 3 P
<b>surface:</b>	black anodised		

A

B

C

D

E

F

G

H

I

K

L

M

Profiles for lock-in fixing spring  
 Assignment table  
 Thermal conductive material  
 Attachable heatsinks

→ A 84 – 88  
 → A 18 – 20  
 → E 2 – 5  
 → C 10 – 16

Mica wafers  
 Kapton insulator washers  
 Thermal conductive paste  
 Technical introduction

→ E 19  
 → E 16  
 → E 21  
 → A 2 – 8

**A 98**

N