
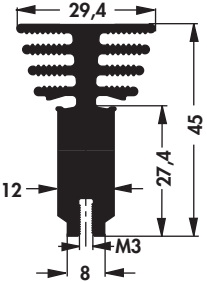
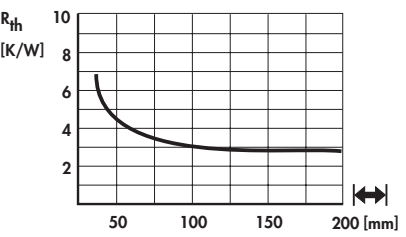

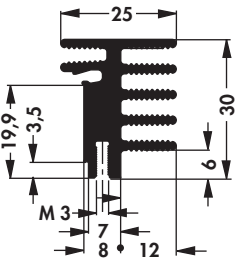
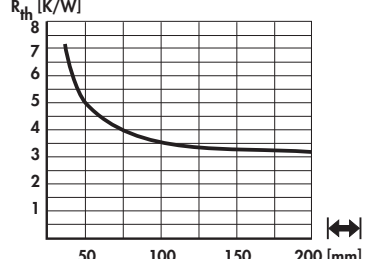

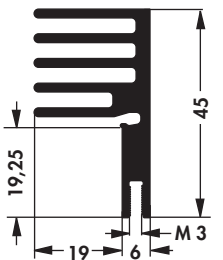
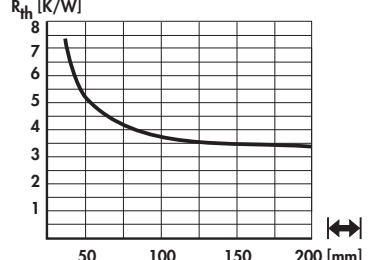

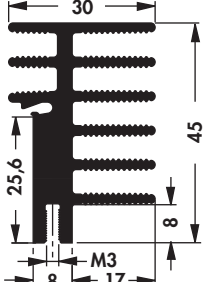
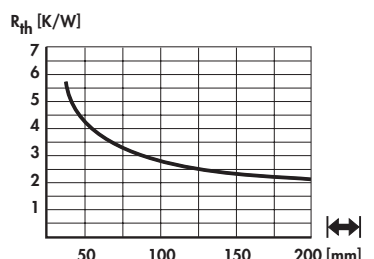


## Extruded heatsinks for lock-in retaining spring

<p>art. no.</p> <p><b>SK 489 ...</b></p>			
<p>please indicate: ... <math>\left[ \begin{array}{c} \text{---} \\ \text{---} \end{array} \right]</math></p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p><b>SK 573 ...</b></p>			
<p>please indicate: ... <math>\left[ \begin{array}{c} \text{---} \\ \text{---} \end{array} \right]</math></p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p><b>SK 576 ...</b></p>			
<p>please indicate: ... <math>\left[ \begin{array}{c} \text{---} \\ \text{---} \end{array} \right]</math></p> <p>25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p><b>SK 481 ...</b></p>			
<p>please indicate: ... <math>\left[ \begin{array}{c} \text{---} \\ \text{---} \end{array} \right]</math></p> <p>25 37.5 50 75 84 100 1000 mm</p>			

**please note:** profile threads → A 5