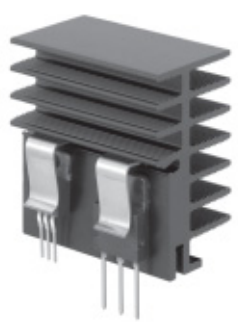
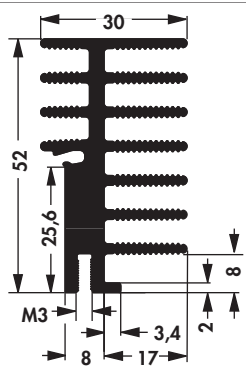
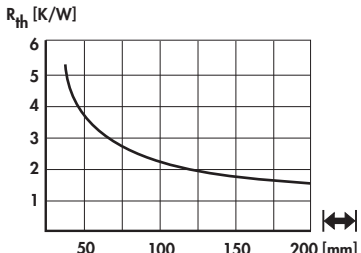


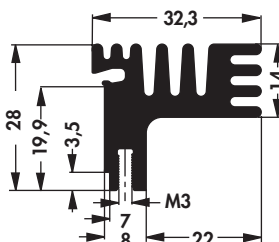
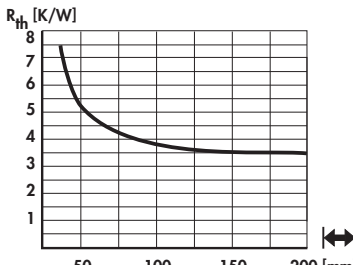

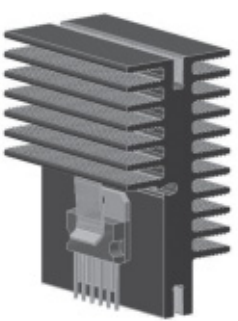
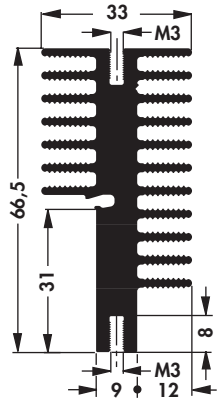
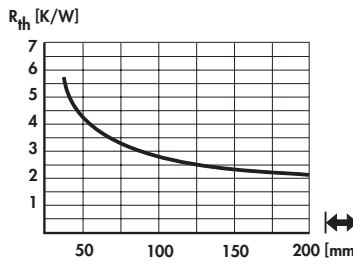


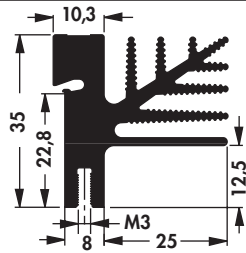
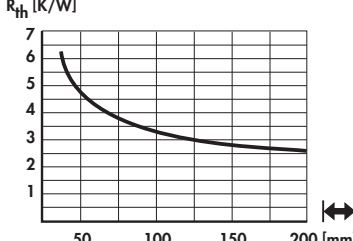



Extruded heatsinks for lock-in retaining spring

A

<p>art. no.</p> <p>SK 514 ...</p>			
<p>please indicate: ...  25 37.5 50 75 100 1000 mm</p>			
<p>art. no.</p> <p>SK 574 ...</p>			
<p>please indicate: ...  25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 589 ...</p>			
<p>please indicate: ...  25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 482 ...</p>			
<p>please indicate: ...  25 37.5 50 75 84 100 1000 mm</p>			

please note: profile threads → A 4

Mounting parts for heatsinks
 Insulating caps
 Mounting pads
 Lock-in transistor fixing spring

→ E 47 – 48 Heatsinks for PCB
 → E 49 Profiles for PCB components
 → E 44 Heatsinks with threaded rail
 → A 117 – 119 Technical introduction

→ A 89
 → A 91
 → A 92
 → A 2 – 7

A 86

B

C

D

E

F

G

H

I

K

L

M

N